

# STANDARD DEPARTURE CHART-INSTRUMENT

VAR 7° W

D-ATIS 126.65  
AP01 123.85(127.95)  
AP02 119.6(127.95)  
TWR 118.25(118.85)

**ZYTL DALIAN/Zhoushuizi**  
RNAV RWY10(CHI,ORAVA,SARUD)

BEARINGS ARE MAGNETIC  
ALTITUDES, ELEVATIONS  
AND HEIGHTS IN METERS  
DME DISTANCES IN  
NAUTICAL MILES  
DISTANCES IN KM

1. RADAR REQUIRED
2. RNAV 1
3. GNSS REQUIRED


TL 3600  
TA 3000  
3300(QNH ≥ 1031hPa)  
2700(QNH ≤ 979hPa)



NOT TO SCALE

TL202: MAX IAS 230kt (For ORAVA/SARUD-09D)  
TL205: MAX IAS 220kt (For CHI-07D)

CHANGHAI  
116.8 CHI  
CH 115X  
N39 16.0E122 37.0

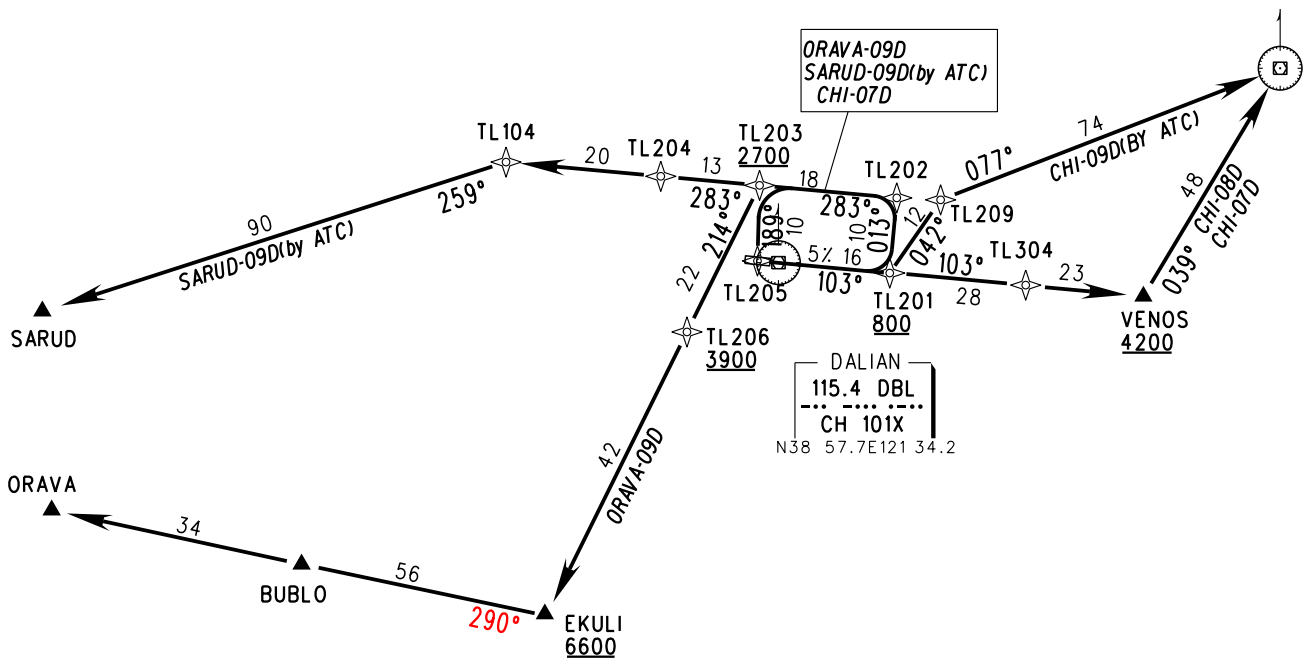

SID	ROUTING	SID	ROUTING
CHI-07D	TL201-TL202-TL203-TL205-TL201-TL304-VENOS-CHI	SARUD-09D	TL201-TL202-TL204-TL104-SARUD
CHI-08D	TL201-TL304-VENOS-CHI	ORAVA-09D	TL201-TL202-TL203-TL206-EKULI-BUBLO-ORAVA
CHI-09D	TL201-TL209-CHI		

**Note:** 1.A close-in obstacle: 1959m on 098° of ARP, altitude 46.5m.

2.When aircraft ALT is 3000m or below, MAX IAS is 250kt.

Changes: Angle.