

STANDARD DEPARTURE CHART-INSTRUMENT

VAR1° W

ZPPP KUNMING/Changshui
RNAV RWY04

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

1. RADAR REQUIRED.
2. GNSS, DME/DME/IRU
REQUIRED.
3. RNAV1.

D-ATIS 128.45


TWR(E) 118.1(118.85)

AP01 119.0(125.55)
AP02 123.8(125.55)
AP03 120.35(127.9)
AP04 121.15(126.55)
AP05 124.25(127.9)
AP07 119.225

TL 6000
TA 5400
5700(QNH≥1031hPa)
5100(QNH≤979hPa)

Notes:

1. Ⓐ While RWY simultaneous operation implemented,
DAD-8X/9X, GUL-9X, ELA-8X/9X by ATC.
2. Under radar control service, actual ALT by ATC.
3. Departure turning is forbidden before DER.

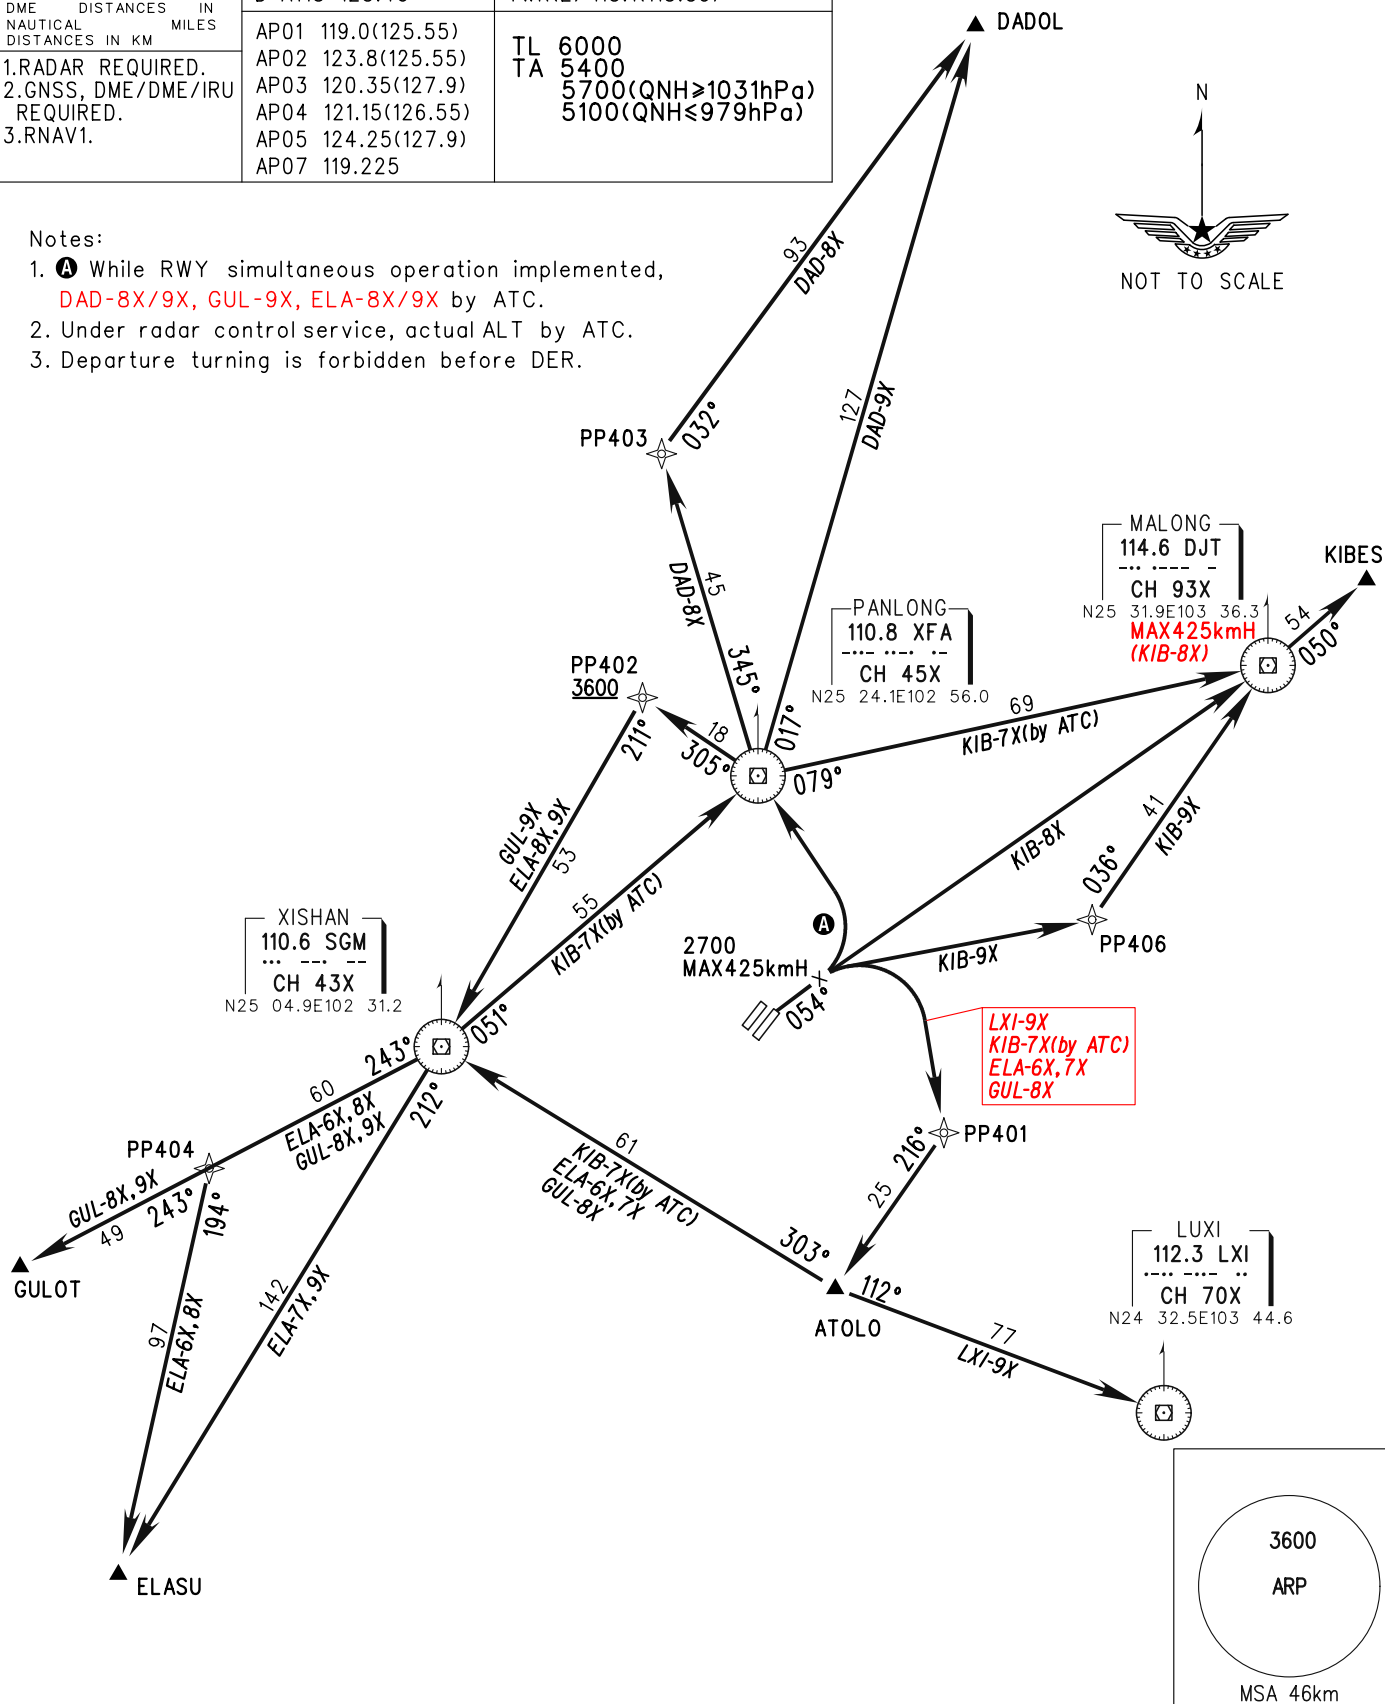

Changes: Notes, MAX IAS at DJT.