
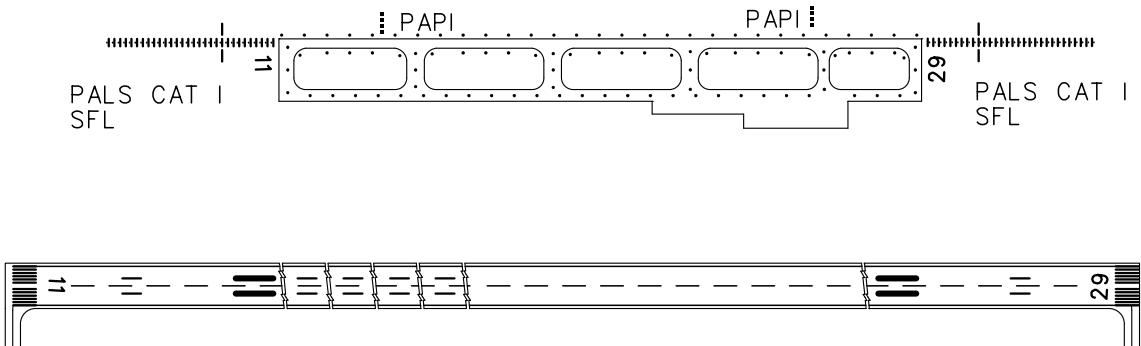


RWY	Direction	Bearing strength(PCN)		BEARINGS ARE MAGNETIC ALTITUDES, DISTANCES, ELEVATIONS AND HEIGHTS IN METERS
11	114°	RWY	70/R/B/W/T	
29	294°	TWY B TWY D TWY F TWY E TWY A TWYs A(west), C TWY G Apron	102/R/B/W/T 97/F/C/W/T 91/R/B/W/T 84/R/B/W/T 77/R/B/W/T 74/R/B/W/T 70/R/B/W/T 73/R/A/W/T	

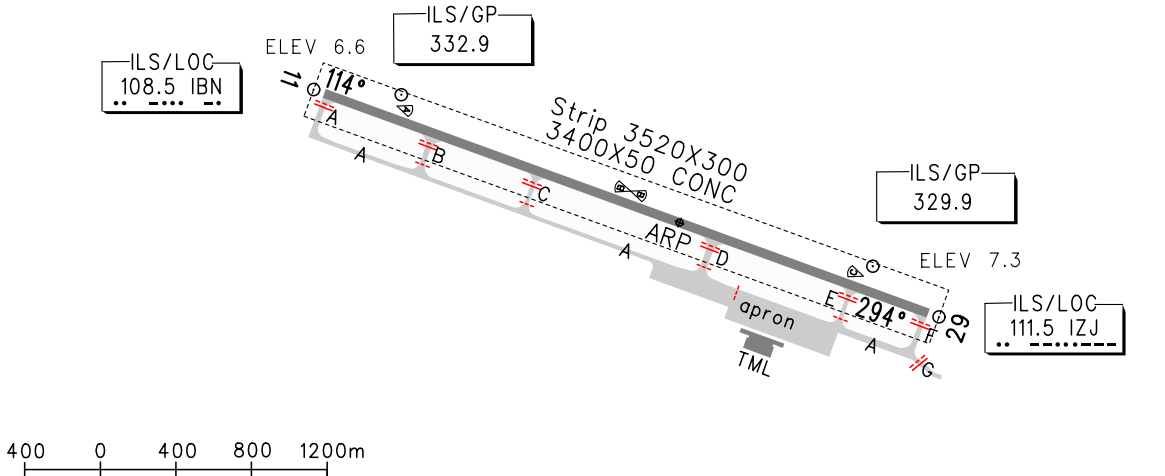

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS		
ACFT Type		RWY11		RWY29		RWY11	RWY29
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A	RVR500 VIS800		RVR500 VIS800		PALS CAT I SFL PAPI REDL RCLL	PALS CAT I SFL PAPI REDL RCLL
	B						
	C						
	D						
Other 1&2 ENG							
Note:							
Changes: Holding positions.							