

# STANDARD DEPARTURE CHART-INSTRUMENT

VAR1° W

ZPPP KUNMING/Changshui  
RNAV RWY03

BEARINGS ARE MAGNETIC  
ALTITUDES, ELEVATIONS  
AND HEIGHTS IN METERS  
DME DISTANCES IN  
NAUTICAL MILES  
DISTANCES IN KM

1.RADAR REQUIRED.  
2.GNSS, DME/DME/IRU  
REQUIRED.  
3.RNAV1.

D-ATIS 128.45


TWR(W) 130.6(118.85)

AP01 119.0(125.55)  
AP02 123.8(125.55)  
AP03 120.35(127.9)  
AP04 121.15(126.55)  
AP05 124.25(127.9)  
AP07 119.225

TL 6000  
TA 5400  
5700(QNH≥1031hPa)  
5100(QNH≤979hPa)

## Notes:

1. **A** While RWY simultaneous operation implemented,  
KIB-8W/9W, LXI-9W by ATC.
2. Under radar control service, actual ALT by ATC.
3. Departure turning is forbidden before DER.

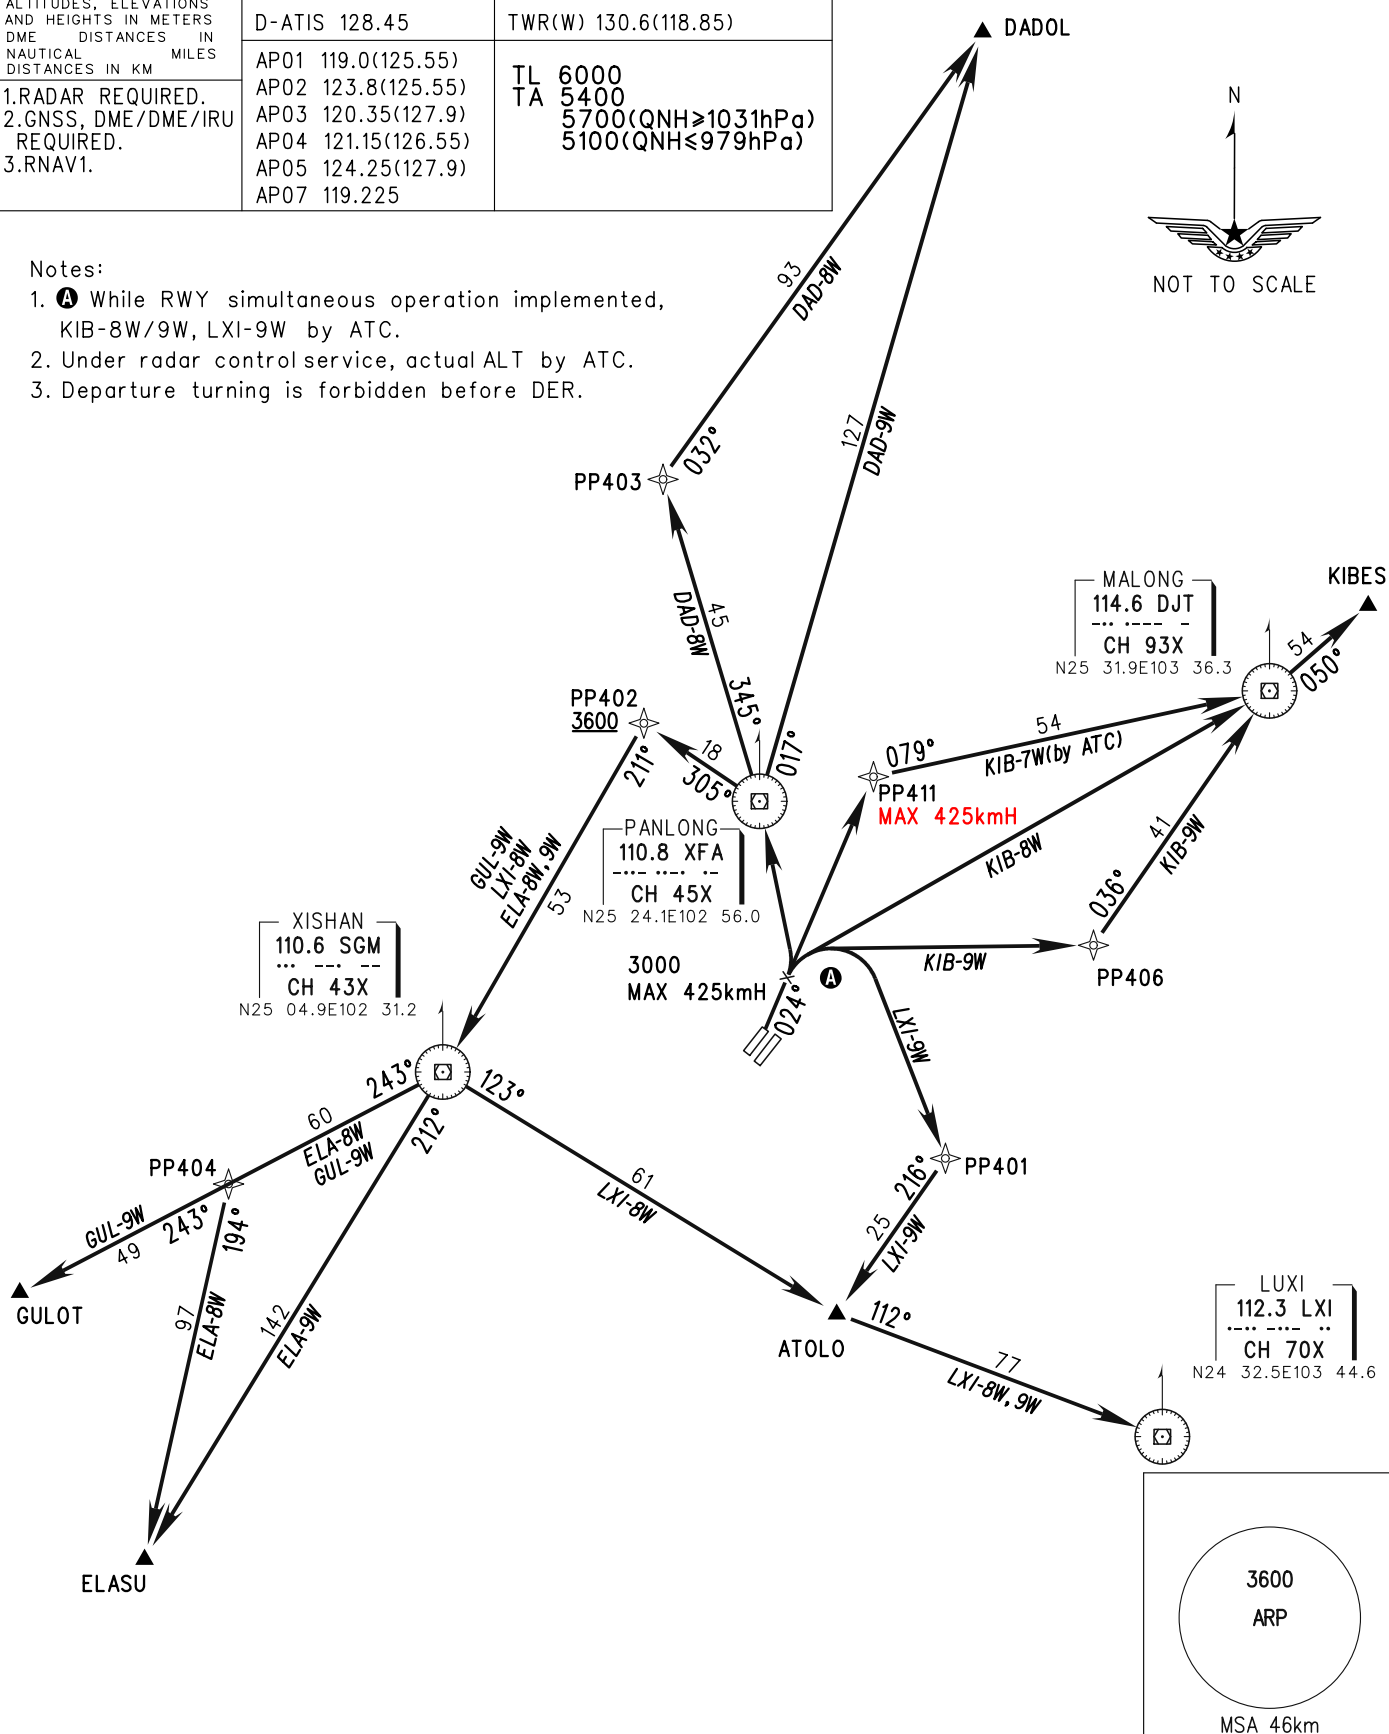

Changes: MAX IAS at PP41I.