

STANDARD DEPARTURE  
CHART-INSTRUMENT

VAR2° W


ZGGG  
GUANGZHOU/Baiyun  
RNAV RWY02R

BEARINGS ARE MAGNETIC ALTITUDES,ELEVATIONS AND HEIGHTS IN METERS DME DISTANCES IN NAUTICAL MILES DISTANCES IN KM		D-ATIS 127.0 APP 126.55(127.75)/AP01 119.70(127.75)/AP02 126.35(119.60)/AP03 121.05(124.20)/AP04 120.40(124.20)/AP05 121.175(127.75)/AP06 TWR 118.25(124.3) for RWY02R/20L	TL 3600(QNH<980hPa) 3300(QNH≥980hPa) TA 2700
1. RNAV 1 2. GNSS,DME/DME/IRU REQUIRED 3. RADAR REQUIRED	or 1. RNP1 2. GNSS REQUIRED		



YINGDE  
113.5 YIN  
CH 82X  
N24 11.4E113 24.9

- Notes:
- 1. Under radar control service, actual flight ALT instructed by ATC.
  - 2. Departure turn to LEFT after take-off shall be permitted by ATC.
  - 3. Turning is forbidden until DER.

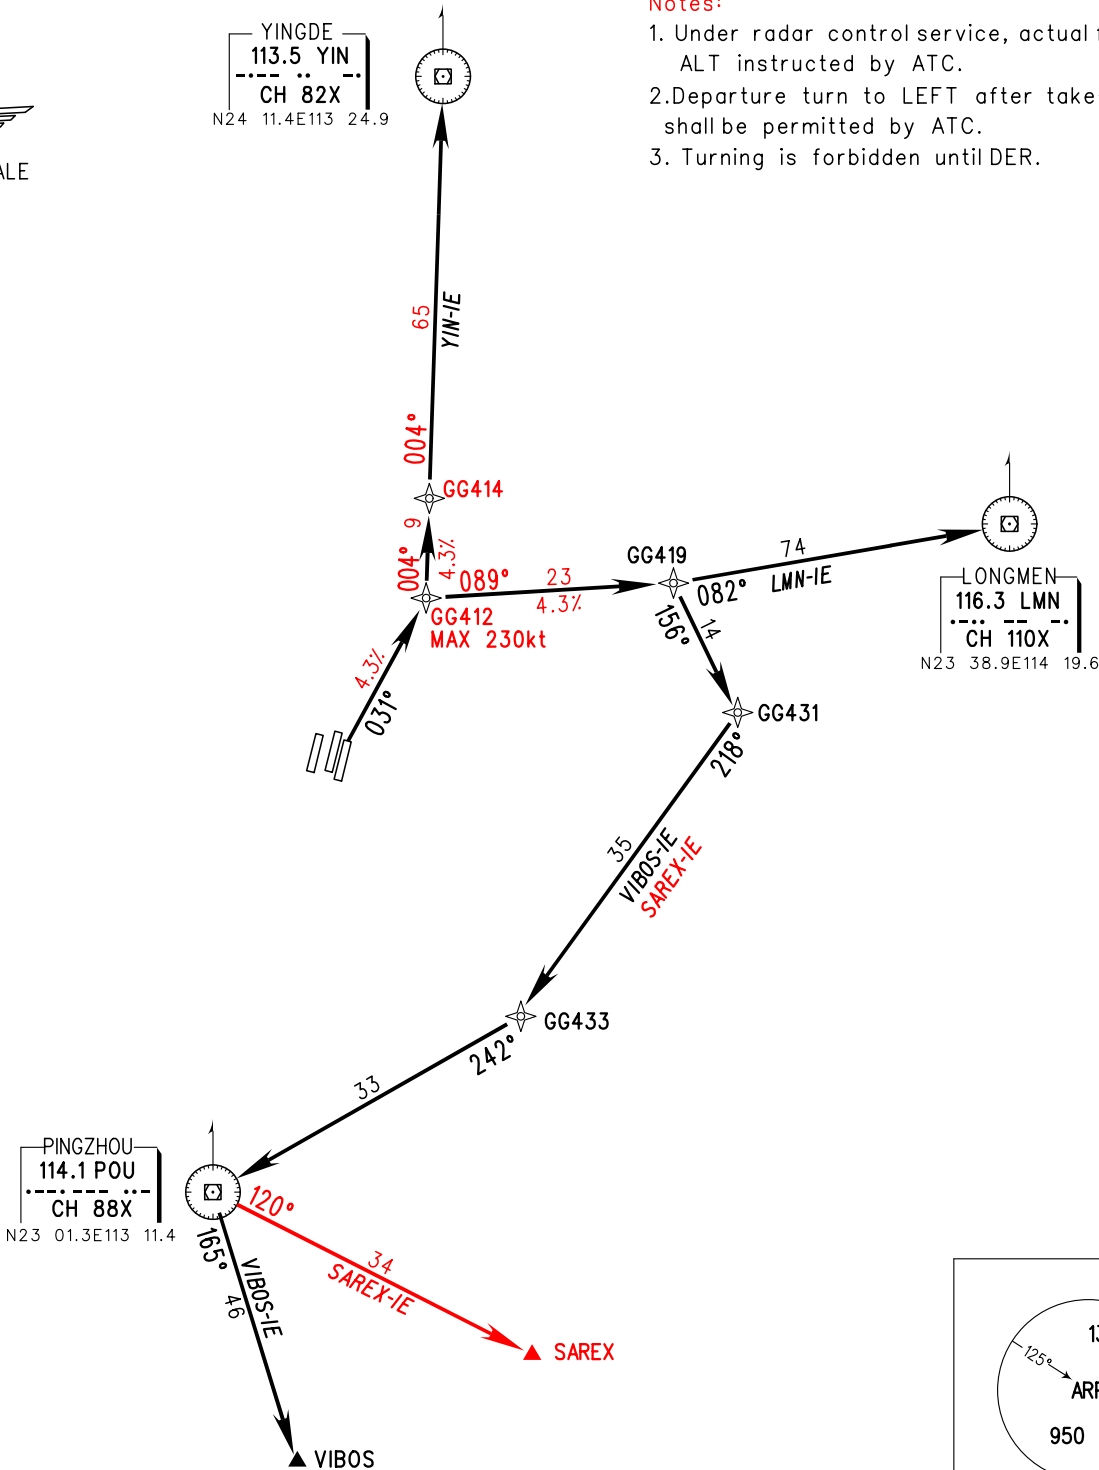

Changes: Procedure.