

RWY	Direction	Bearing strength(PCN)					
06	062°	RWY.TWY.APRON: PCN 60/R/B/W/T					
24	242°	RWI.IWI.AFRON. FON 607R7B7W71					

BEARINGS ARE MAGNETIC ALTITUDES, DISTANCES, ELEVATIONS AND HEIGHTS IN METERS



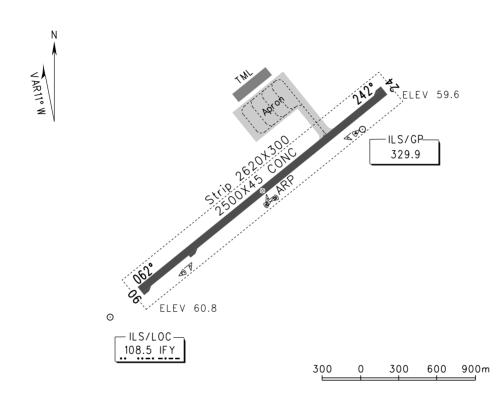



TAK	E-OFF MINIM	IA(WITH RELIA	LIGHTS			
ACFT Type	RWY06		RWY24		RWY06	RWY24
7.01	REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG B C D	RVR400 VIS800	RVR500 VIS800	RVR400 VIS800	RVR500 VIS800	SALS PAPI REDL RCLL	PALS CAT I SFL PAPI REDL
Other 1&2 ENG		VIS1	NOLL	RCLL		
Note:						
Changes:				·		