

STANDARD ARRIVAL CHART-INSTRUMENT

D-ATIS 126.85(ARR)
TWR 130.35(118.05)(E)
VAR2° W 118.45(130.35)(W)


ZGSZ SHENZHEN/Baoan
RWY33/34

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

Zhuhai APP(R) TM01 120.35(127.95)
TM02 124.25(126.0)
TM03 123.85(126.0)
TM04 124.75(127.95)
TM05 119.025(119.55)


TL 3600(QNH<980hPa)
3300(QNH>980hPa)
TA 2700

Ⓐ Deviation to southeast is forbidden.
Arrival MAX IAS 460KMH below 3300m.
Holding MAX IAS 380KMH.
Initial approach MAX IAS 380KMH.



NOT TO SCALE

This chart only used when 'ZUH' U/S

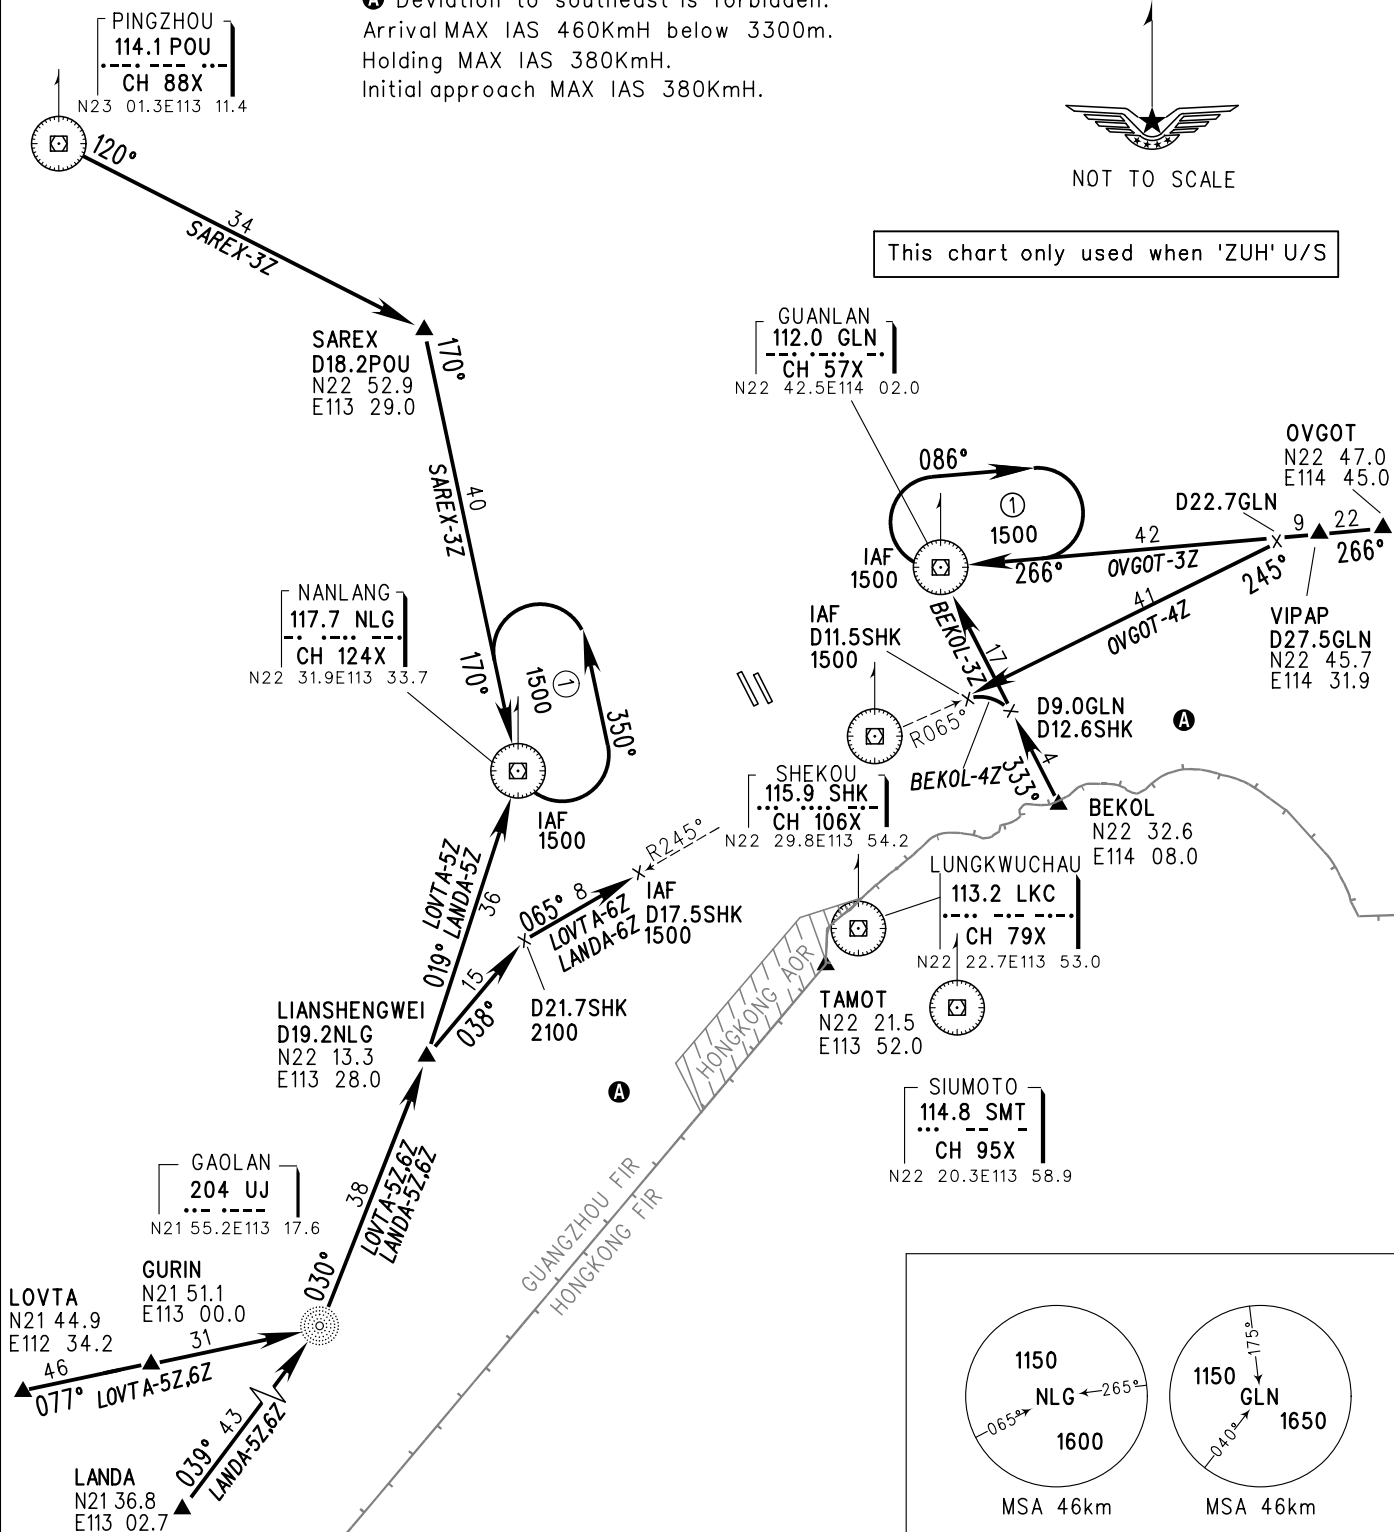

Note: Deviation to south is forbidden for LOVTA-6Z, LANDA-6Z, BEKOL-4Z, OVGOT-4Z.
When VOR 'SHK' U/S, LOVTA-4Z, LANDA-4Z, BEKOL-4Z, OVGOT-4Z is not available.

Changes: APP.