

STANDARD DEPARTURE CHART-INSTRUMENT

D-ATIS 127.45(DEP)
TWR 130.35(118.05)(E)
VAR2° W 118.45(130.35)(W)


ZGSZ SHENZHEN/Baoan

RWY16


BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

Zhuhai APP(R) TM01 120.35(127.95)
TM02 124.25(126.0)
TM03 123.85(126.0)
TM04 124.75(127.95)
TM05 119.025(119.55)

TL 3600(QNH<980hPa)
3300(QNH>980hPa)
TA 2700



SHILONG
115.7 SHL
CH 104X
N23 05.5E113 51.0

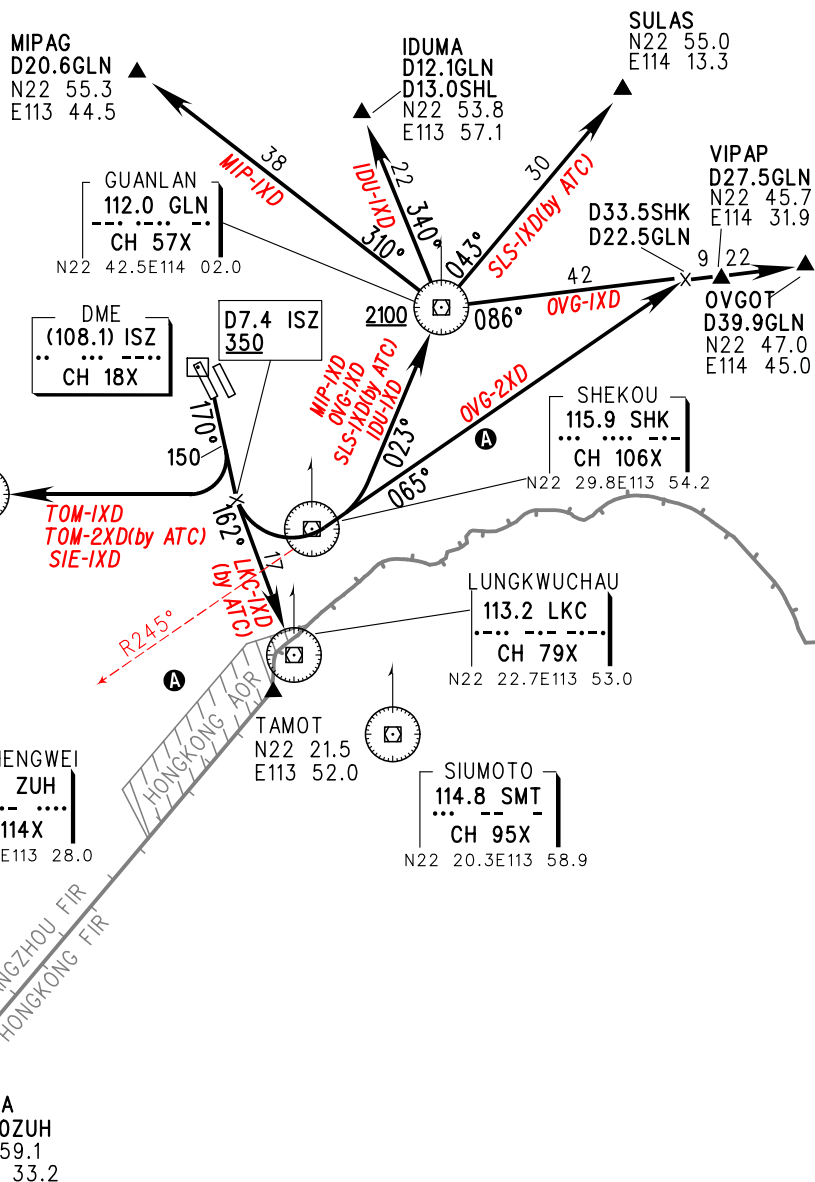

- Note:**
- ① Deviation to south of R065° SHK is forbidden for OVG-1XD/2XD, SLS-1XD, IDU-1XD, MIP-1XD.
 - ② Departure turn MAX IAS 425km/h.
 - ③ When two RWYs used for independent departure, SLS-1XD, IDU-1XD, OVG-1XD/2XD, LKC-1XD, MIP-1XD need ATC clearance.
 - ④ Turning is forbidden until DER
 - ⑤ Deviation to south is forbidden.

Changes: Procedure.

