

AERODROME CHART



TWR 118.15(118.8)

ZBDS ORDOS/Ejin Horo

N39°29.4'E109°51.9' ELEV 1400m

RWY	Direction	Bearing strength(PCN)	
13	127°	RWY	90/F/B/W/T
		TWY A,A2,A3. Apron Nr.2	88/R/B/W/T
31	307°	TWY A1. Apron Nr.1	52/R/B/W/T
		TWY Z. General apron	11/R/B/W/T

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

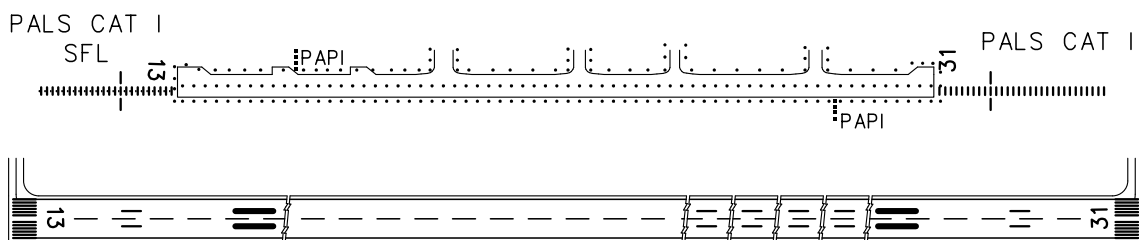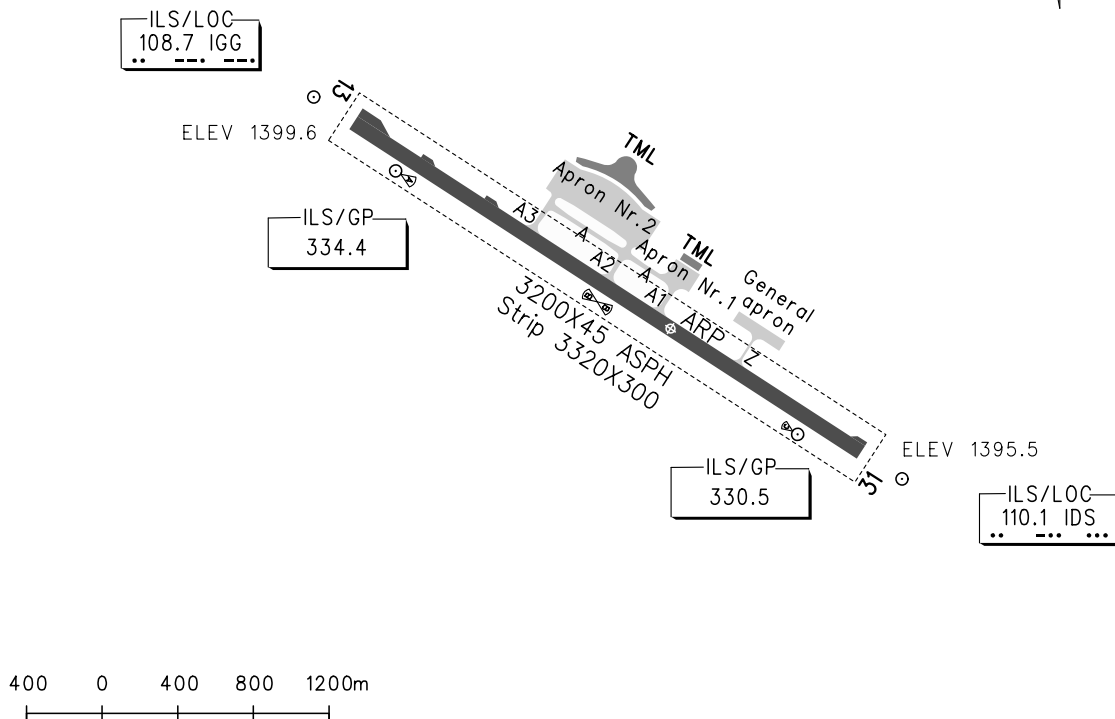

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS		
ACFT Type		RWY13		RWY31		RWY13	RWY31
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A					PALS CAT I SFL PAPI REDL RCLL	PALS CAT I PAPI REDL RCLL
	B	RVR400	RVR500	RVR400	RVR500		
	C	VIS800	VIS800	VIS800	VIS800		
	D						
Other 1&2 ENG							
Note: VIS1600m for single engine							
Changes: RWY center circle marking deleted							