

STANDARD DEPARTURE CHART-INSTRUMENT

ZPPP KUNMING/Changshui

RNAV RWY22

VAR1°W

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

1.RADAR REQUIRED.
2.GNSS, DME/DME/IRU
REQUIRED.
3.RNAV1.

TWR(E) 118.1(118.85)

TL 6000
TA 5400
5700(QNH≥1031hPa)
5100(QNH≤979hPa)




NOT TO SCALE

Note:

1. Ⓐ While RWY simultaneous operation implemented,
DAD-9Z, KIB-8Z, ELA-8Z/9Z, GUL-9Z by ATC.
2. Under radar control service, actual ALT by ATC.
3. When taking off, forbidden to turn before DER.

D-ATIS 128.45

AP01 119.0(125.55)
AP02 123.8(125.55)
AP03 124.25(127.9)
AP04 121.15(126.55)
AP05 120.35(127.9)
AP07 119.225

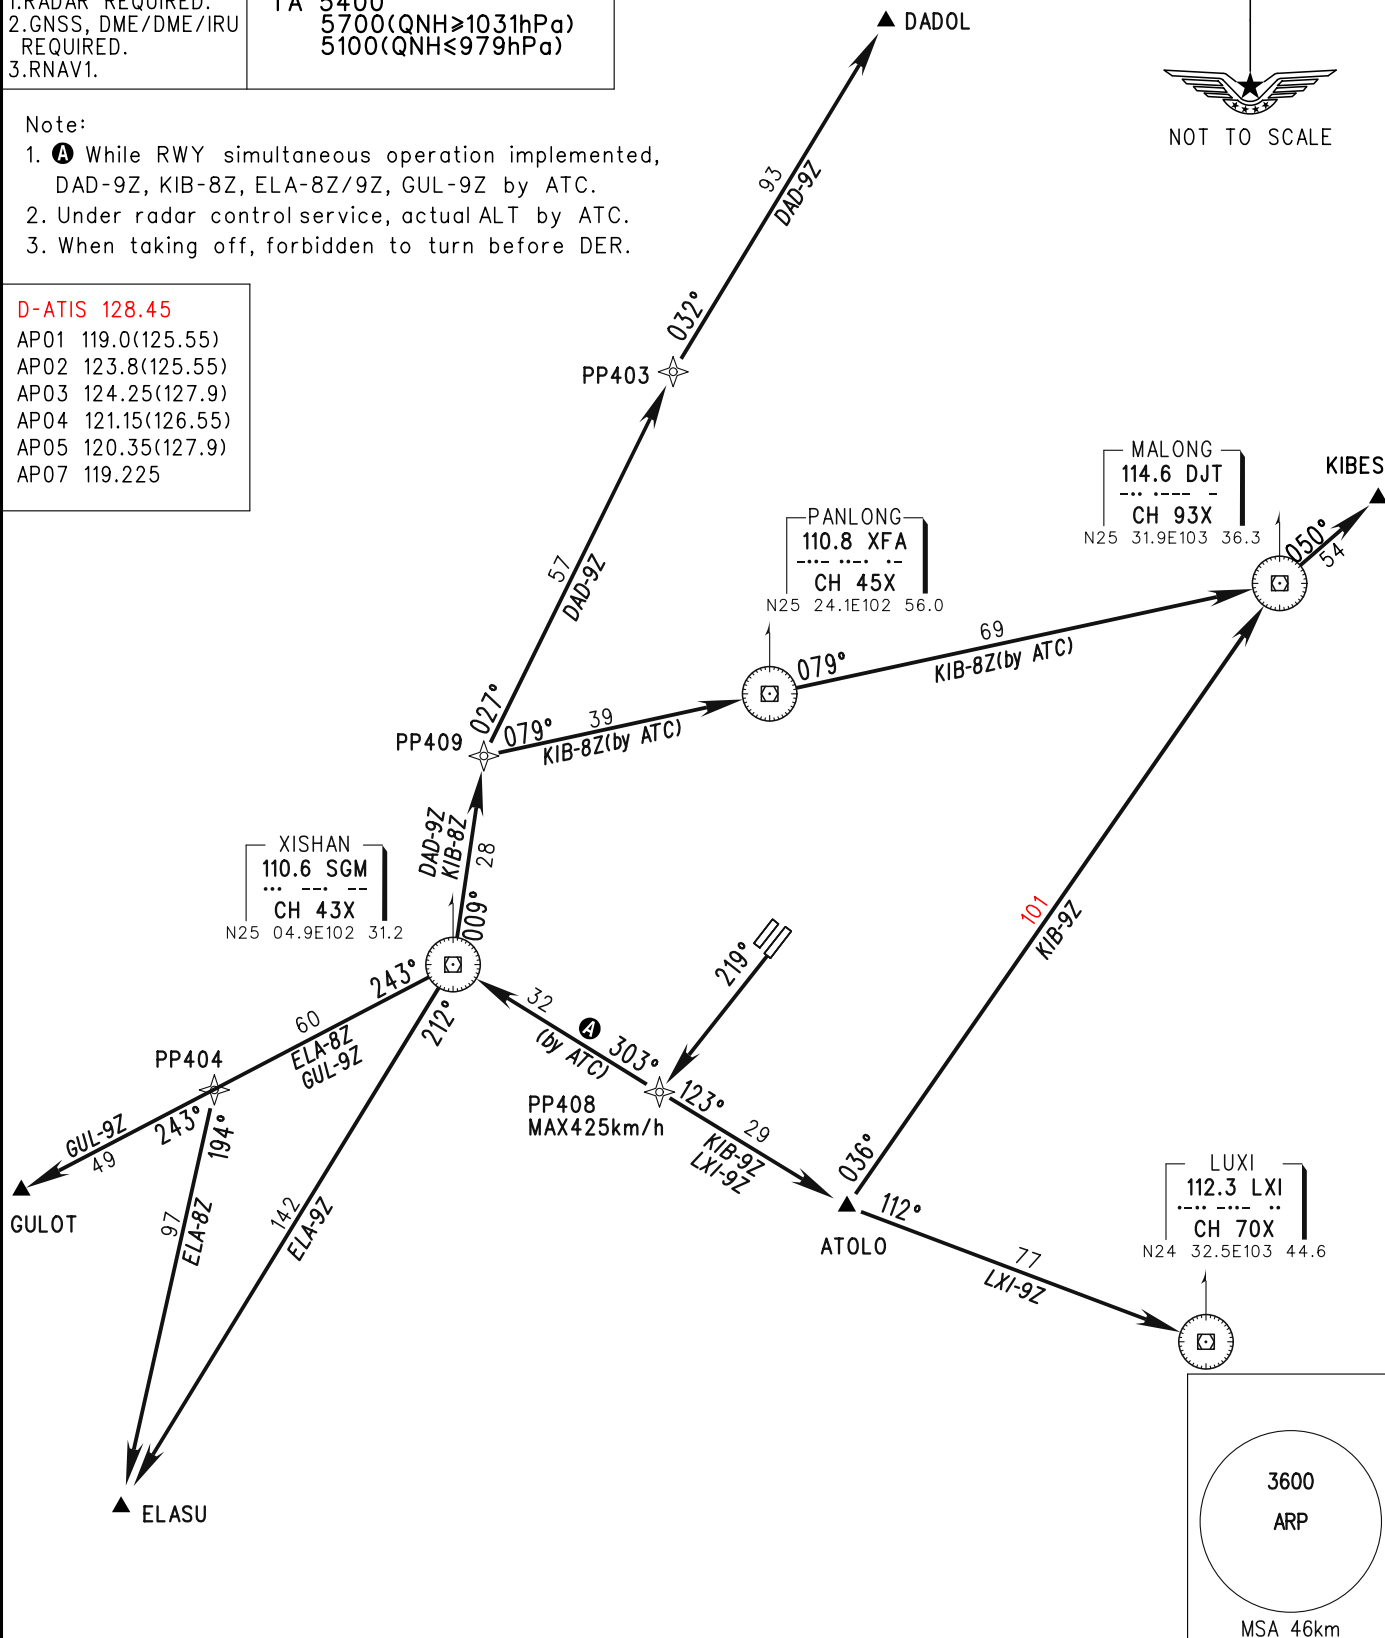

Changes: D-ATIS, distance of ATOLO-DJT.