RNAV RWY20L/20R(PANKO/CDX)

BEARINGS ARE MAGNETIC, ALTITUDES, ELEVATIONS AND HEIGHTS IN METTERS, DME DISTANCES IN NAUTICAL MILES, DISTANCES IN KM.

GNSS, DME/DME/IRU, RNAV1, RADAR required

GNSS, RNP1


D-ATIS 126.45 20R:TWR123.0(118.85) 20L:TWR130.35(118.85) APP03 119.25(127.7)

APP01 124.85(127.7) APP02 119.7(127.7) APP04 124.75(125.25)

APP05 119.425(125.25)


3600 3000 3300(QNH≥1031hPa) TL TΑ 2700(QNH < 979hPa)



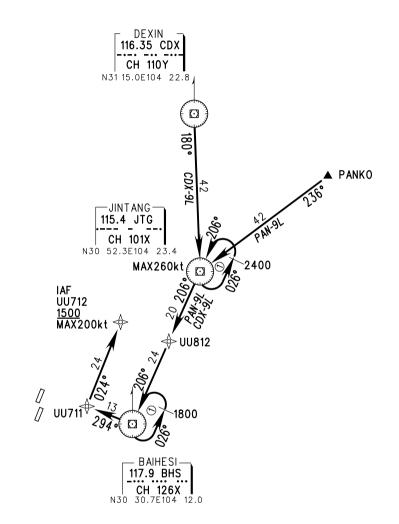

Note:

Under radar control service, actural flight ALT by ATC.



Changes: New chart.