


# STANDARD ARRIVAL CHART-INSTRUMENT

VAR6° W

ATIS 126.4  
APP01 127.9(120.9)  
APP02 125.25(120.9)  
APP03 119.275(120.9)  
TWR 118.2(130.0)

ZBTJ TIANJIN/Binhai  
RNAV RWY16L/R  
(DUMAP、AVBOX)


BEARINGS ARE MAGNETIC  
ALTITUDES, ELEVATIONS  
AND HEIGHTS IN METERS  
DME DISTANCES IN  
NAUTICAL MILES  
DISTANCES IN KM



No aircraft is permitted to manenver or circumnavigate CB in the dash-line area ④.

TL 3600  
TA 3000  
3300(QNH $\geq$ 1031hPa)  
2700(QNH $\leq$ 979hPa)

1. RNAV 1
2. RADAR REQUIRED
3. GNSS, IRU REQUIRED



NOT TO SCALE



TIANJIN APP AREA IAF

IAF  
TJ919  
900  
MAX205kt   
**1** by ATC 

IAF  
TJ960  
600  
MAX205kt

$$\left[ \begin{array}{c} \text{TIANJIN} \\ 112.1 \text{ TAJ} \\ - \text{CH} \cdot - \cdot - \text{X} \\ \text{N39} \quad 06.6\text{E117} \quad 21.5 \end{array} \right]$$

- ➊ AVBOX-4ZA.DUMAP-4ZA
- ➋ AVBOX-6ZA.DUMAP-6YA
- ➌ Outbound distance 10km

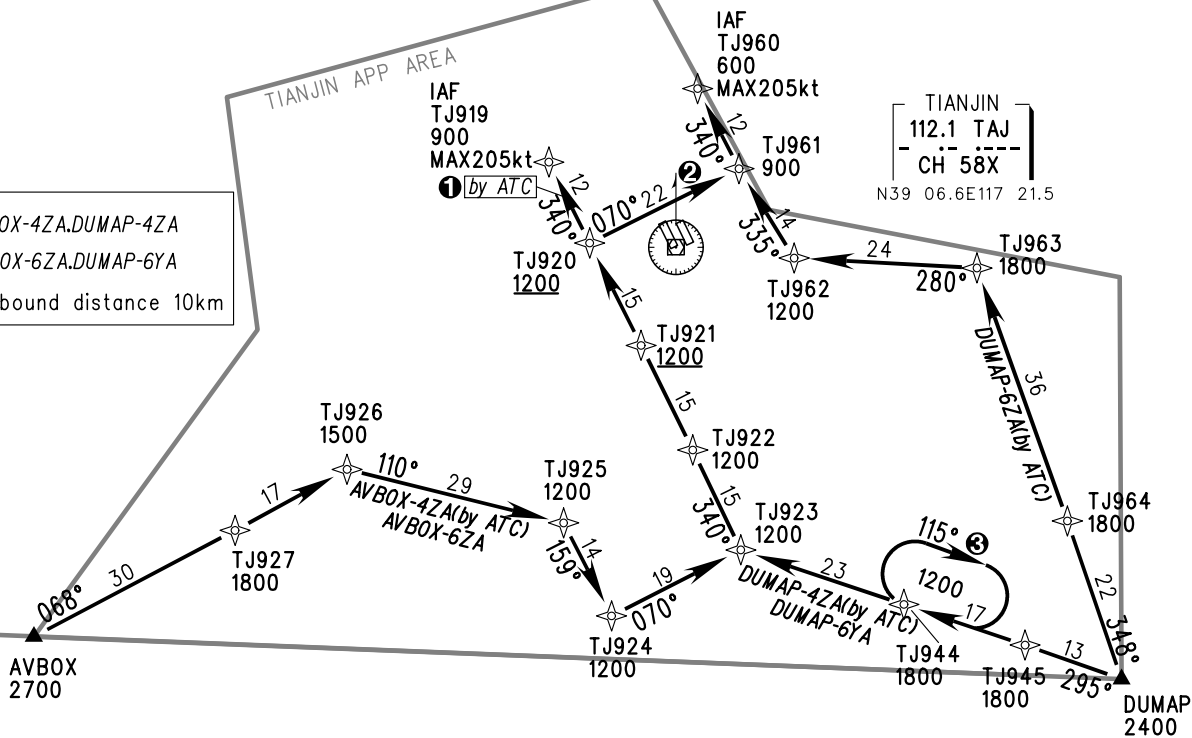

MSA 46km

*Changes: Procedure.*