

# STANDARD ARRIVAL CHART-INSTRUMENT

D-ATIS 126.85(ARR)  
TWR 130.35(118.05)(E)  
VAR2° W 118.45(130.35)(W)


ZGSZ SHENZHEN/Baoan  
RNAV RWY16

BEARINGS ARE MAGNETIC  
ALTITUDES, ELEVATIONS  
AND HEIGHTS IN METERS  
DME DISTANCES IN  
NAUTICAL MILES  
DISTANCES IN KM


Zhuhai APP(R) TM01 120.35(127.95)  
TM02 124.25(126.0)  
TM03 123.85(126.0)  
TM04 124.75(127.95)  
TM05 119.025(119.55)

1. RADAR REQUIRED
2. RNAV 1 3. RNP1
4. GNSS or DME/DME/IRU REQUIRED

TL 3600(QNH <980hPa)  
3300(QNH ≥980hPa)  
TA 2700

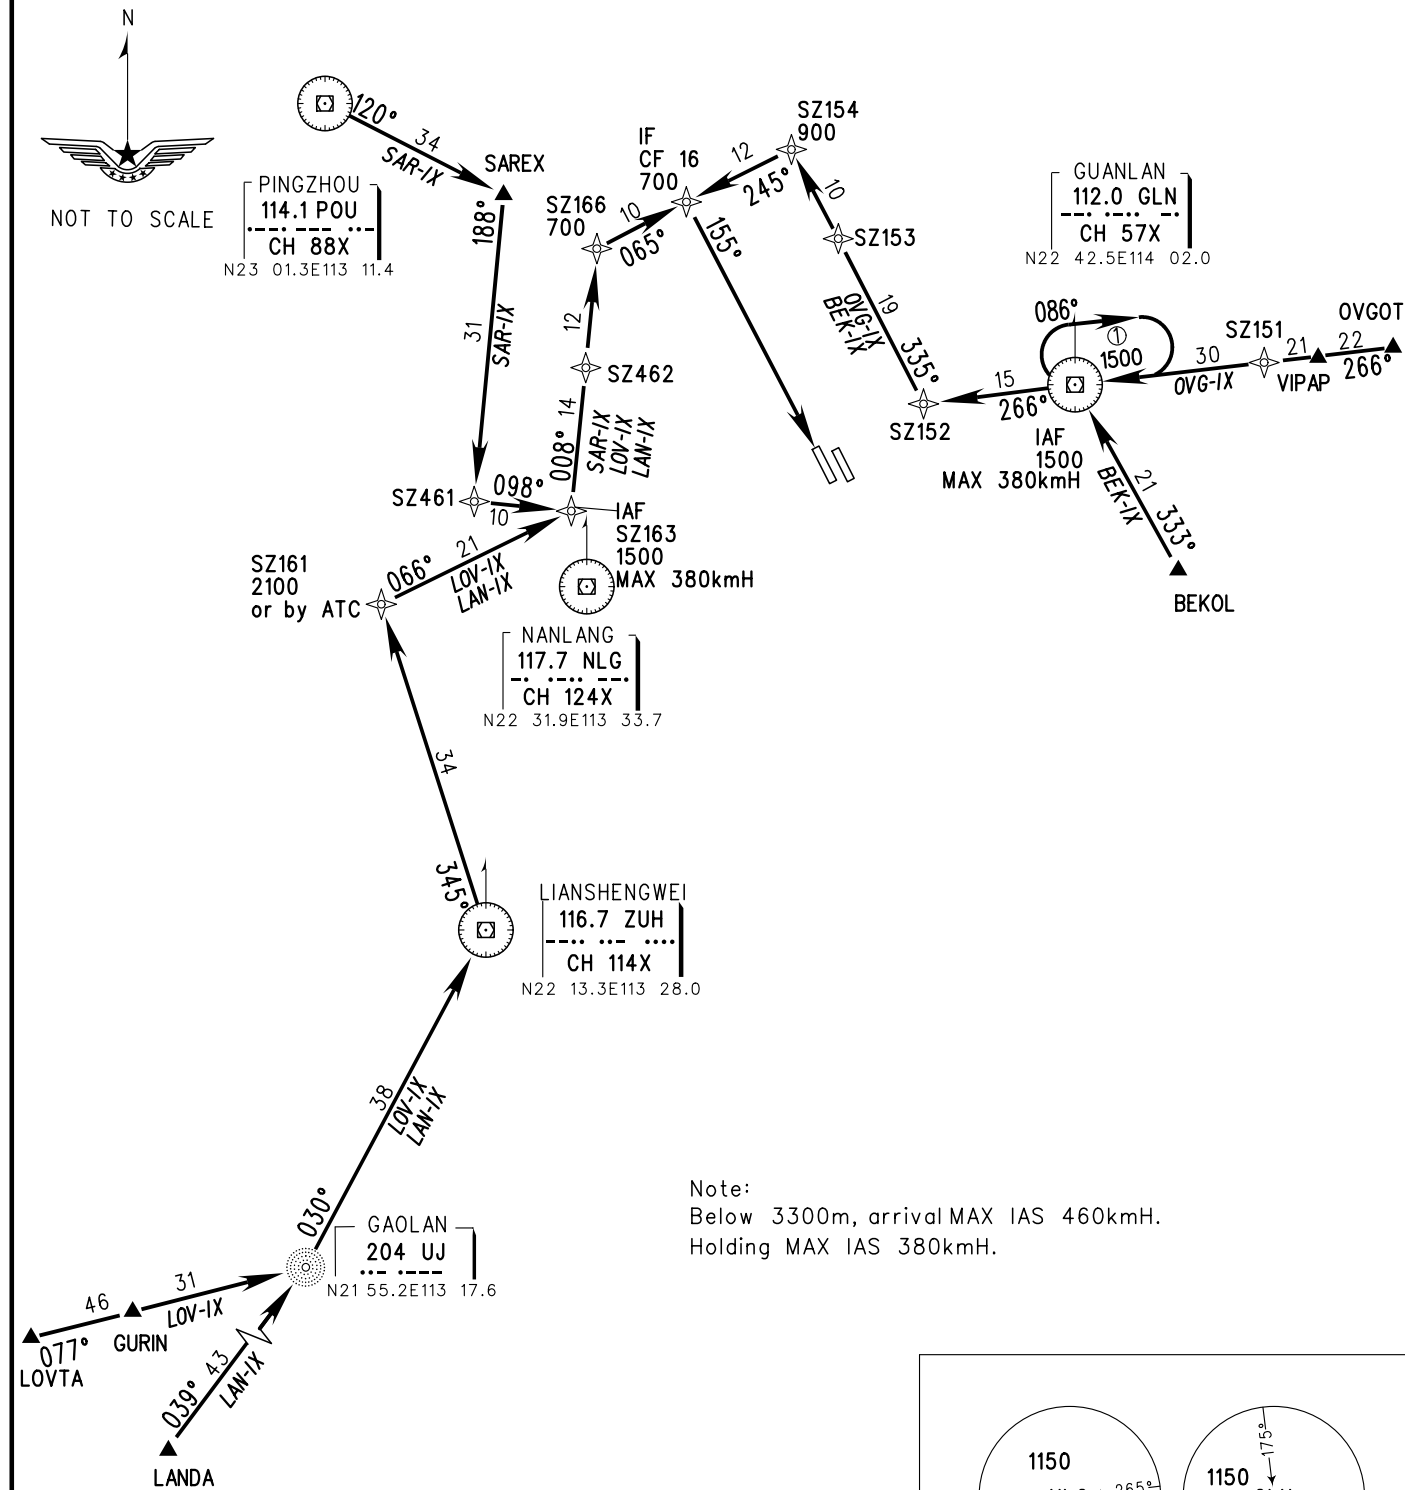

Note:  
Below 3300m, arrival MAX IAS 460kmH.  
Holding MAX IAS 380kmH.

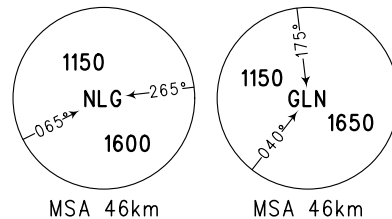

Changes: APP.