

AERODROME CHART

D-ATIS 127.25
 EMG 121.50
 TWR(N) 123.65(118.75)
 TWR(S) 118.3(118.75)

Ramp(N) 121.725(121.55)
 Ramp(S) 121.85(121.55)
 GND 121.65
 Delivery 121.95(DCL AVBL)

ZSHC HANGZHOU/Xiaoshan

N30° 13.7'E120° 26.0' ELEV 7m

BEARINGS ARE MAGNETIC
 ALTITUDES, DISTANCES,
 ELEVATIONS AND HEIGHTS
 IN METERS

Note:


1. A/C are forbidden to enter RWY via rapid exit TWYs A3-A6, C3-C6.
2. [HS1] - [HS6]: Hot spot.
3. TWR blind zone



RWY	Direction	Bearing strength(PCN)
06/07	067°	RWY07/25, TWY A,A1,A2,A7,A8,B(BTN A1&B6),B6,B7,B10: 95/R/R/B/W/T RWY06/24, TWY B(BTN B7&K), B1,B3-B5,C,C1,C2,C7,C8, 92/R/R/B/W/T D(BTN D5&L),D5-D8,J,J2-J6,K, Apron Nr.1,2: TWY B(BTN B6&B7),D(E of L,W of D5),D1-D4,L, Z16-Z18, Apron Nr.7(N of 711-726(stands included)), Apron Nr.6(600-613), Apron Nr.9(901-916): Apron Nr.3,7(701-710): Apron Nr.7(S of 711-726(stands not included)) Nr.9(917-928), D0,Z19,Z20: TWY C3-C6: Apron Nr.6(616-626): TWY A3-A6, Apron Nr.5:
24/25	247°	82/R/R/B/W/T 80/R/R/B/W/T 73/R/R/B/W/T 72/R/R/B/W/T 67/R/R/B/W/T

Strip 3520X300

3400X60 CONC

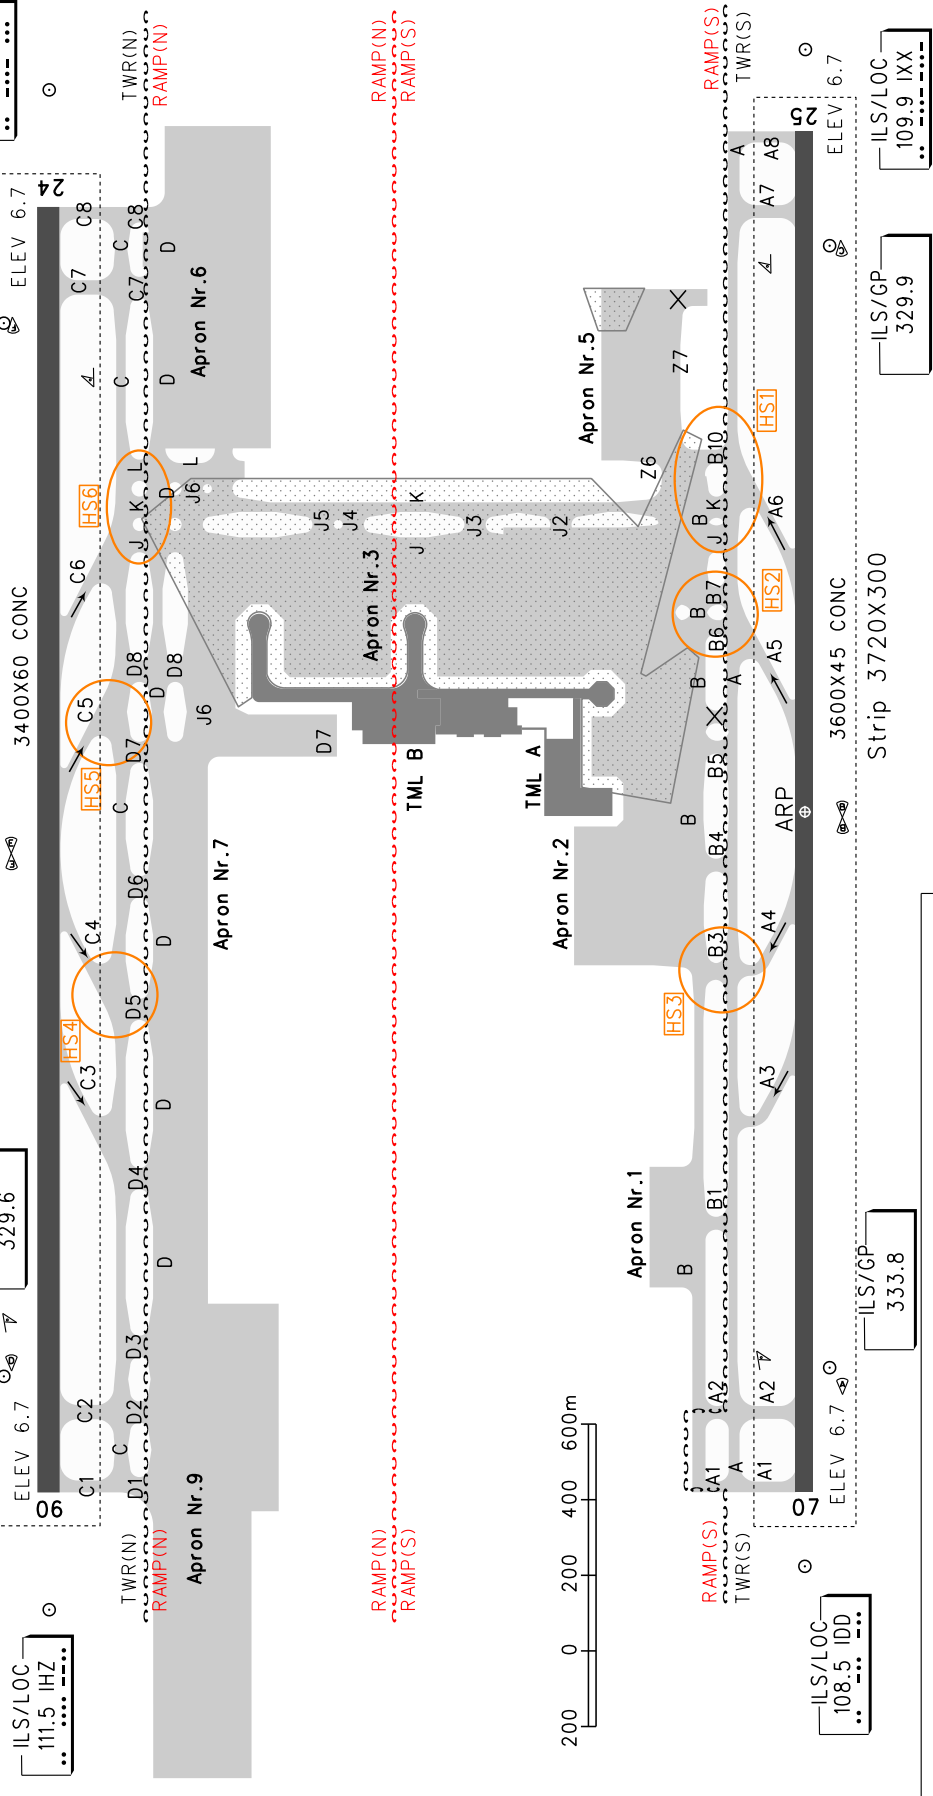

Changes: FREQ.