

STANDARD DEPARTURE CHART-INSTRUMENT

VAR0.5° W

D-ATIS 127.65
APP01 119.15(120.225)
APP02 119.975(120.225)
TWR 118.55(124.3)


ZJHK HAIKOU/Meilan
RNAV RWY27

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

| | |
|----|---------------------|
| TL | 3600 |
| TA | 3000 |
| | 3300(QNH ≥ 1031hPa) |
| | 2700(QNH ≤ 979hPa) |



1. GNSS REQUIRED
2. RNP1 or RNAV1
3. RADAR REQUIRED (for RNAV1)

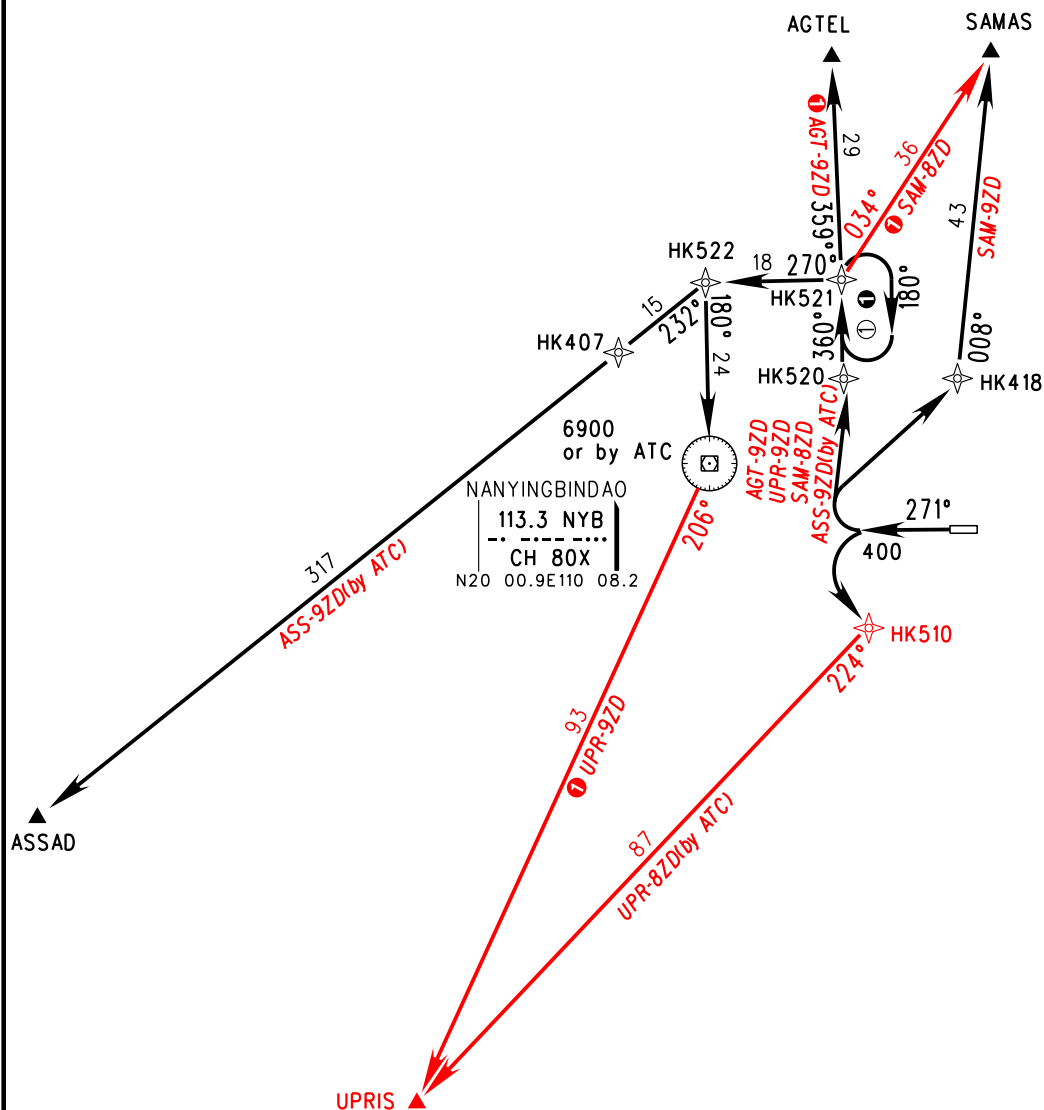

① SAM-8ZD,AGT-9ZD,UPR-9ZD: When airspace is restricted, A/C shall spiral climb at HK521.

ARP
600

MSA 46km

Changes: Procedure.