

STANDARD DEPARTURE CHART-INSTRUMENT

D-ATIS 127.45(DEP)
TWR 130.35(118.05)(E)
VAR2°W 118.45(130.35)(W)


ZGSZ SHENZHEN/Baoan

RWY15


BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

Zhuhai APP(R) TM01 120.35(127.95)
TM02 124.25(126.0)
TM03 123.85(126.0)
TM04 124.75(127.95)
TM05 119.025(119.55)

TL 3600(QNH<980hPa)
3300(QNH>980hPa)
TA 2700



NOT TO SCALE

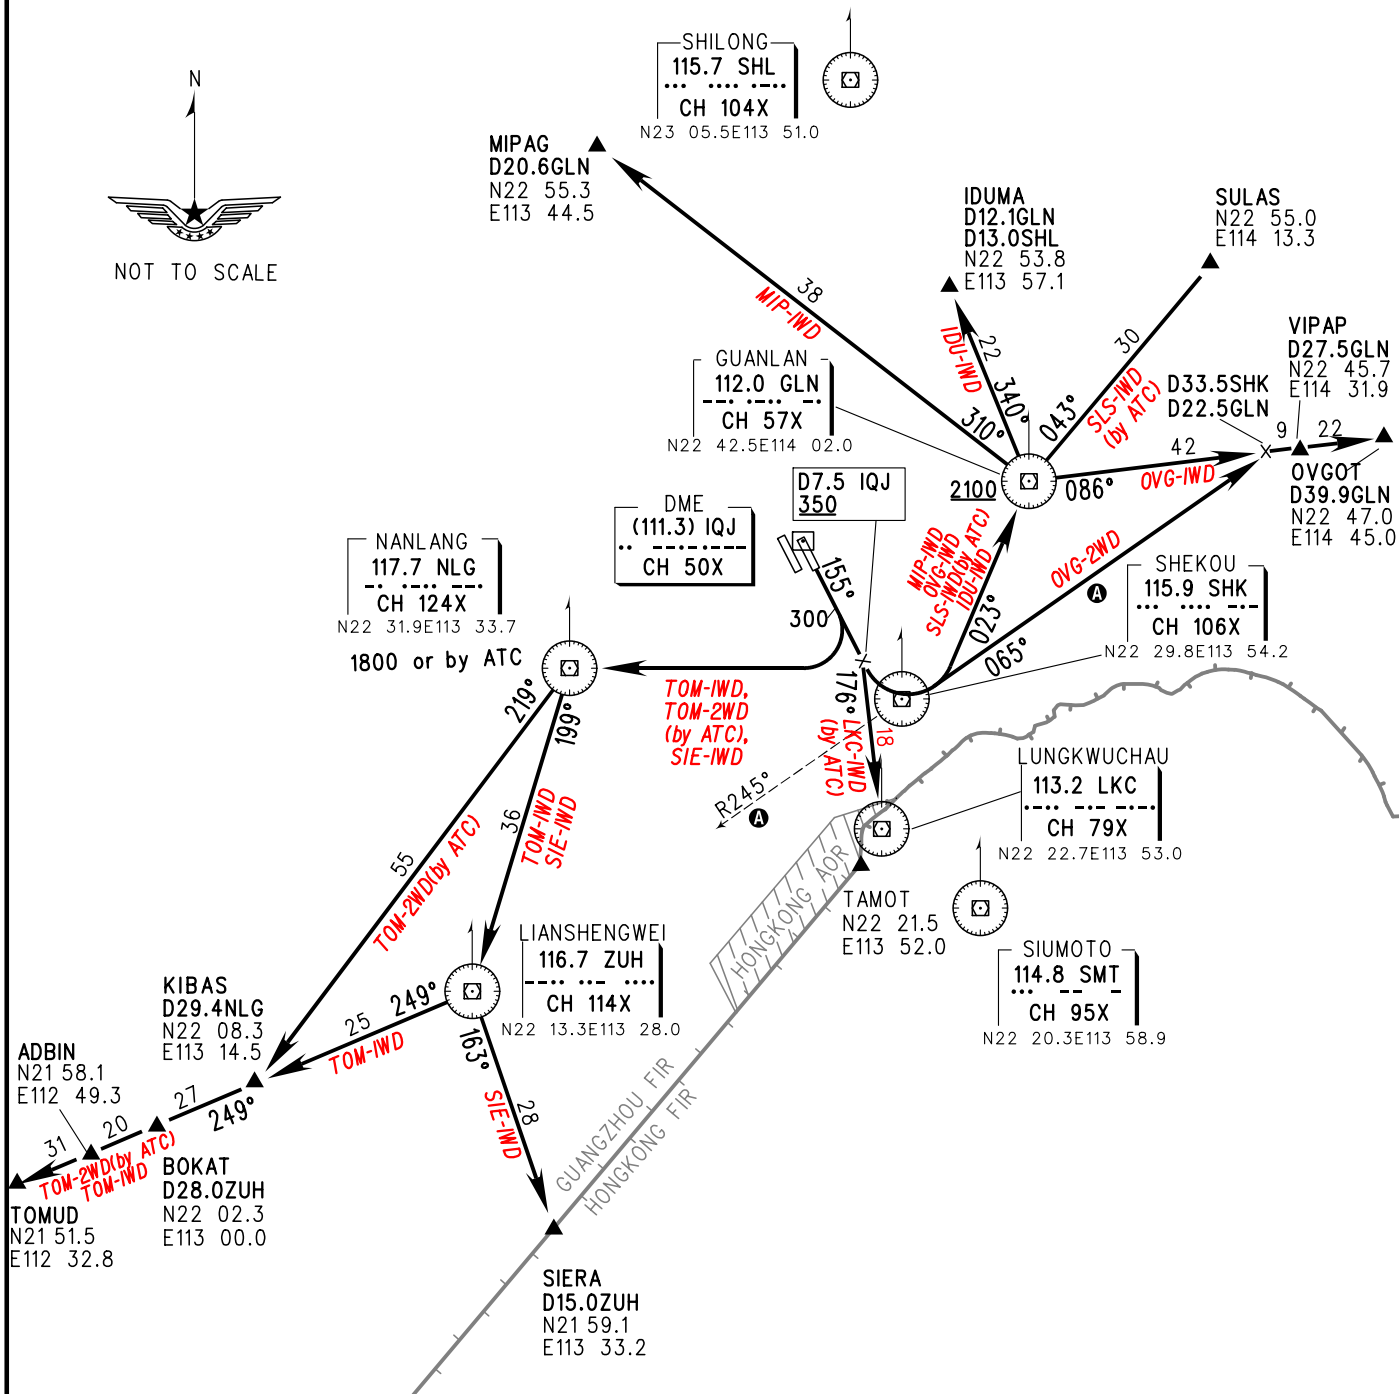

- Note:**
- ① Deviation to south of R065°SHK is forbidden for OVG-1WD/2WD, IDU-1WD, SLS-1WD, MIP-1WD. Deviation to south of R245°SHK is forbidden for TOM-1WD/2WD, SIE-1WD.
 - ② Departure turn MAX IAS 425kmH.
 - ③ When two RWYs used for independent departure, TOM-1WD/2WD, SIE-1WD need ATC clearance.
 - ④ Deviation to south is forbidden.

Changes: Procedure.

