
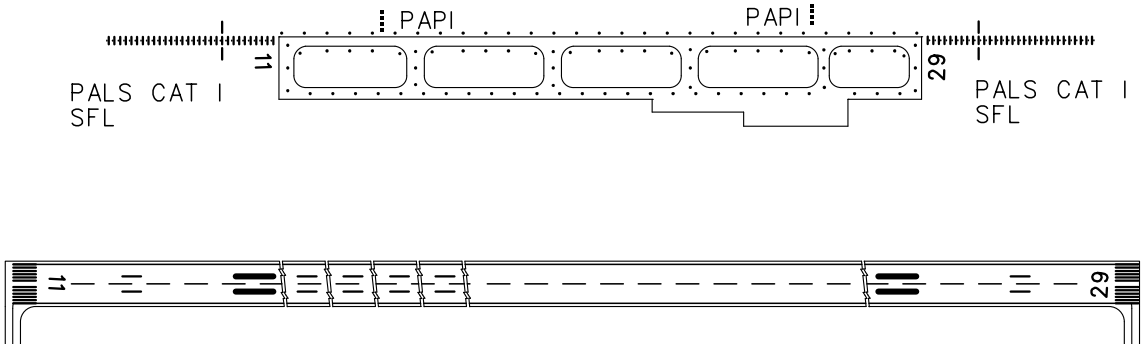


RWY	Direction	Bearing strength(PCN)	
11	114°	RWY	70/R/B/W/T
29	294°	TWY B	102/R/B/W/T
		TWY D	97/F/C/W/T
		TWY F	91/R/B/W/T
		TWY E	84/R/B/W/T
		TWY A	77/R/B/W/T
		TWYs A(west), C	74/R/B/W/T
		TWY G	70/R/B/W/T
		Apron	73/R/A/W/T

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

N

VAR 4° W

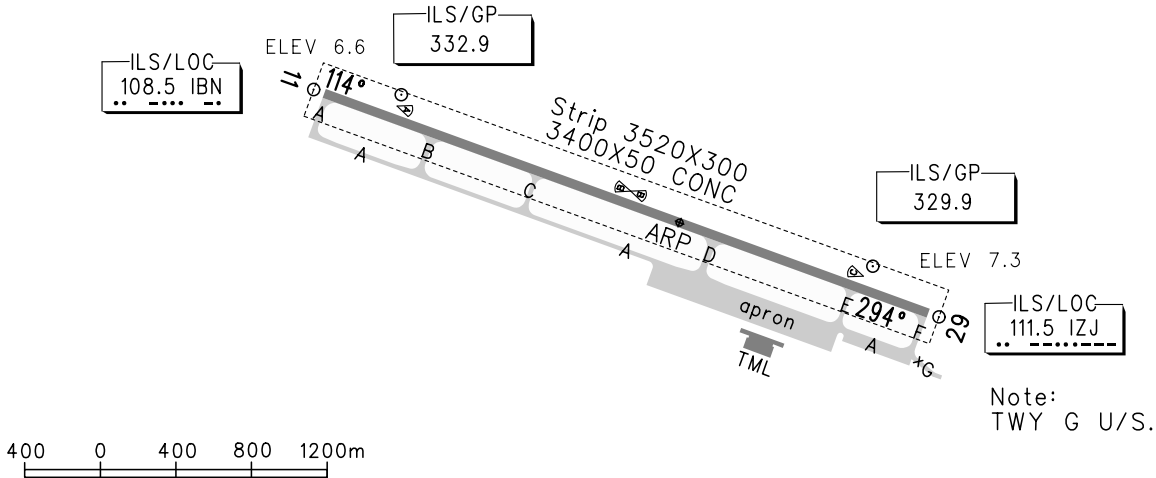

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS		
ACFT Type		RWY11		RWY29		RWY11	RWY29
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A	RVR500 VIS800		RVR500 VIS800		PALS CAT I SFL PAPI REDL RCLL	PALS CAT I SFL PAPI REDL RCLL
	B						
	C						
	D						
Other 1&2 ENG							
Note:							
Changes: ATIS.							