



RWY	Direction	Bearing strength(PCN)
09L	089°	RWY:PCN 74/F/B/W/T TWY A1.A4.A5.A7:PCN 71/R/B/W/T TWY A:PCN 56/R/B/W/T TWY A3:PCN 51/R/B/W/T
27R	269°	TWY A6:PCN 29/R/A/W/T TWY A2:PCN 28/R/B/W/T

BEARINGS ARE MAGNETIC  
ALTITUDES, DISTANCES,  
ELEVATIONS AND HEIGHTS  
IN METERS

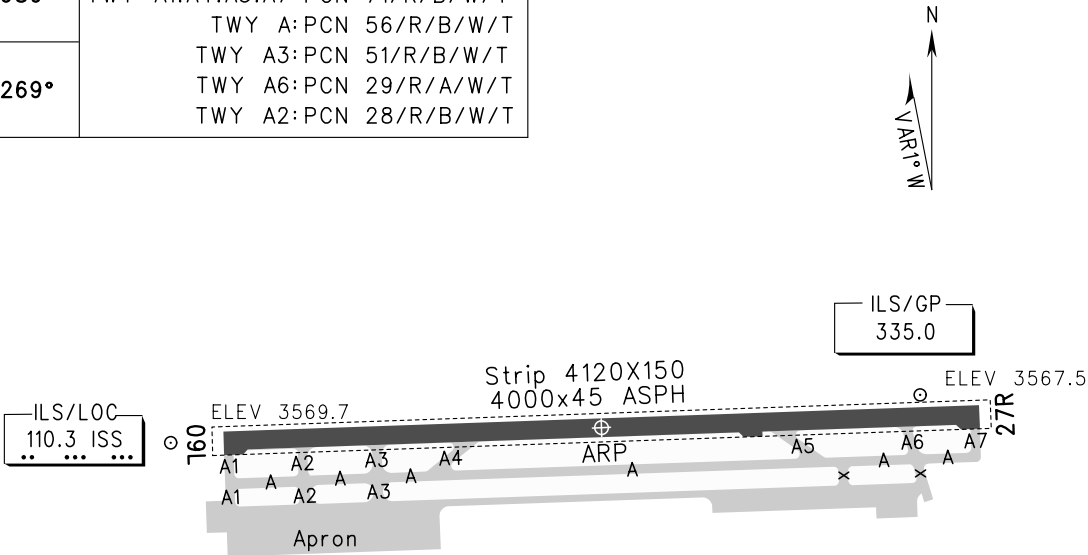

- Notes:
- 1. 'x' U/S.
  - 2. TWY A4, A5, A6 and A7 are not AVBL for night flight.
  - 3. Do not mistake the parallel TWY for RWY09L/27R.

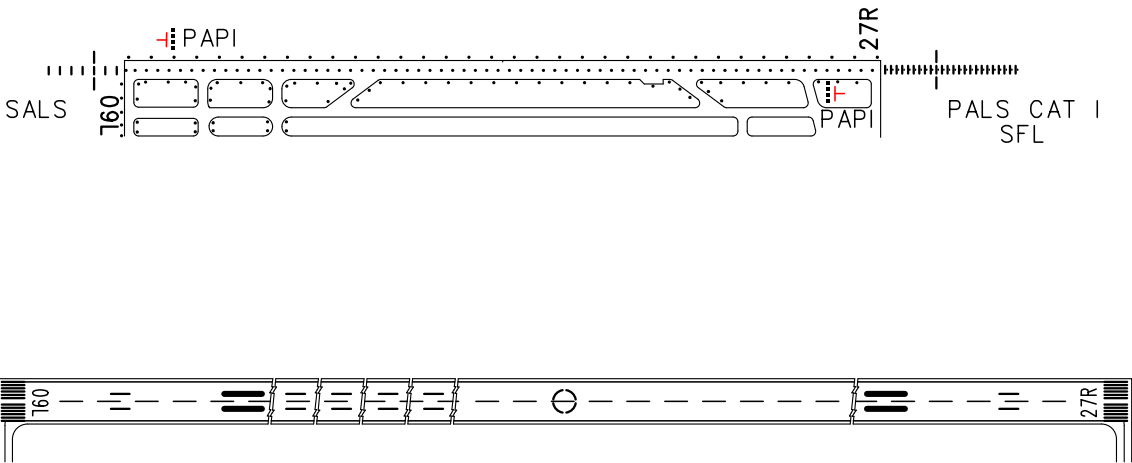

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS		
ACFT Type		RWY09L		RWY27R		RWY09L	RWY27R
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A	VIS 800	VIS 800	NIL	NIL	SALS PAPI REDL RCLL	PALS CAT I SFL PAPI REDL RCLL
	B						
	C						
	D						
Other 1&2 ENG		VIS1600		NIL			
Note:							

Changes: Notes, LDI location.