

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

GNSS, DME/DME/IRU,
RNAV1, RADAR REQUIRED


RNAV RWY22

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

TL 6000
TA 5400
5700(QNH \geq 1031hPa)
5100(QNH \leq 979hPa)

GNSS, DME/DME/IRU,
RNAV1, RADAR REQUIRED

or GNSS. RNP1




NOT TO SCALE

Note:

1. **A** While RWY simultaneous operation implemented, DAD-9Z, KIB-8Z, ELA-8Z/9Z, GUL-9Z by ATC.
2. Under radar control service, actual ALT by ATC.
3. Departure turning is forbidden before DER.

D-ATIS 126.275

AP01 119.0(125.55)
AP02 123.8(125.55)
AP03 124.25(127.9)
AP04 121.15(126.55)
AP05 120.35(127.9)
AP07 119.225

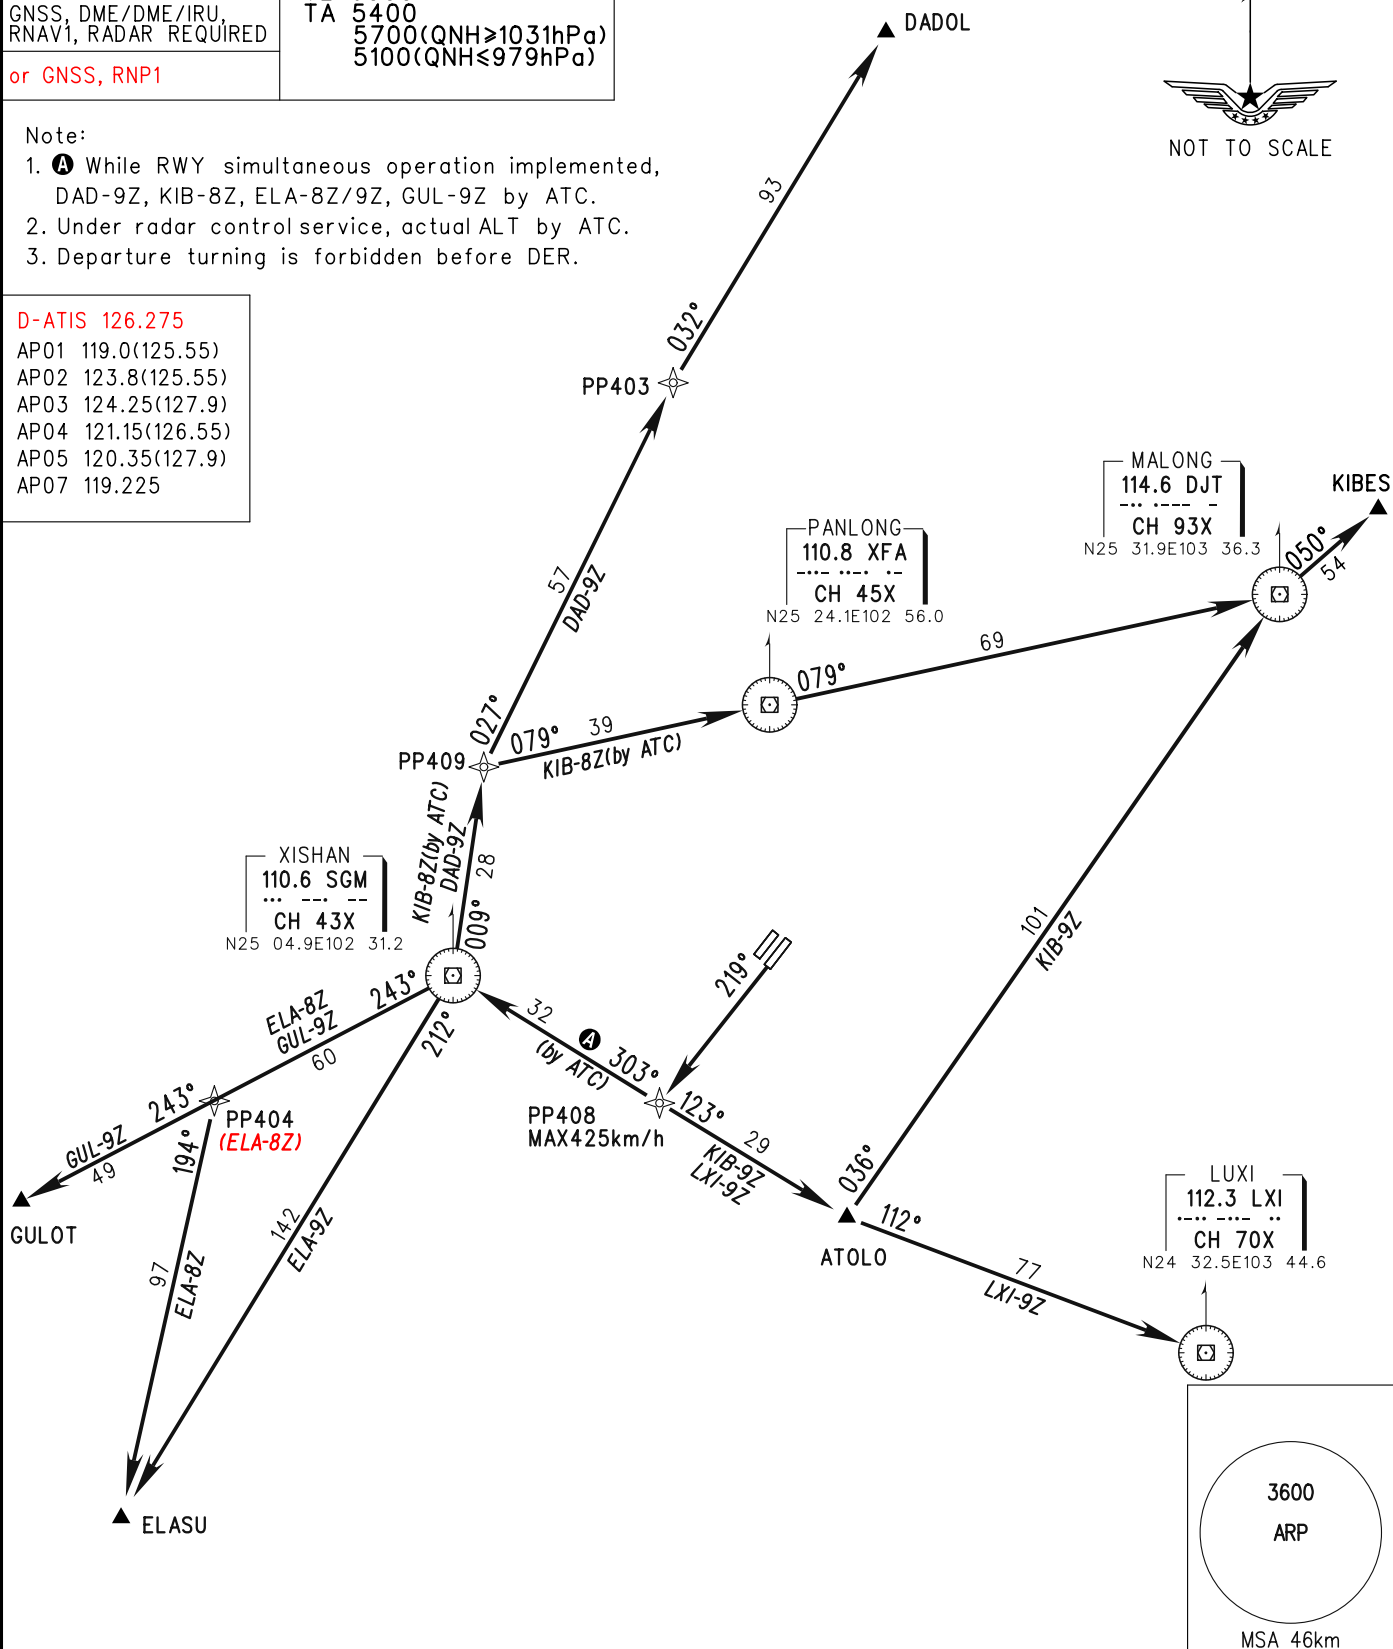

Changes: D-ATIS, navigation specification.