


STANDARD ARRIVAL CHART-INSTRUMENT

ZPPP KUNMING/Changshui
RNAV RWY21

VAR1° W

BEARINGS ARE MAGNETIC ALTITUDES, ELEVATIONS AND HEIGHTS IN METERS DME DISTANCES IN NAUTICAL MILES DISTANCES IN KM	D-ATIS 128.45	TWR(W) 130.6(118.85)
	AP01 119.0(125.55) AP02 123.8(125.55) AP03 124.25(127.9) AP04 121.15(126.55) AP05 120.35(127.9) AP07 119.225	TL 6000 TA 5400 5700(QNH≥1031hPa) 5100(QNH≤979hPa)


- 1.RADAR REQUIRED.
- 2.GNSS, DME/DME/IRU REQUIRED.
- 3.RNAV1.



NOT TO SCALE

Note:

1. ALT 4200m and below, MAX IAS 380km/h.
2. Under radar control service, actual ALT by ATC.

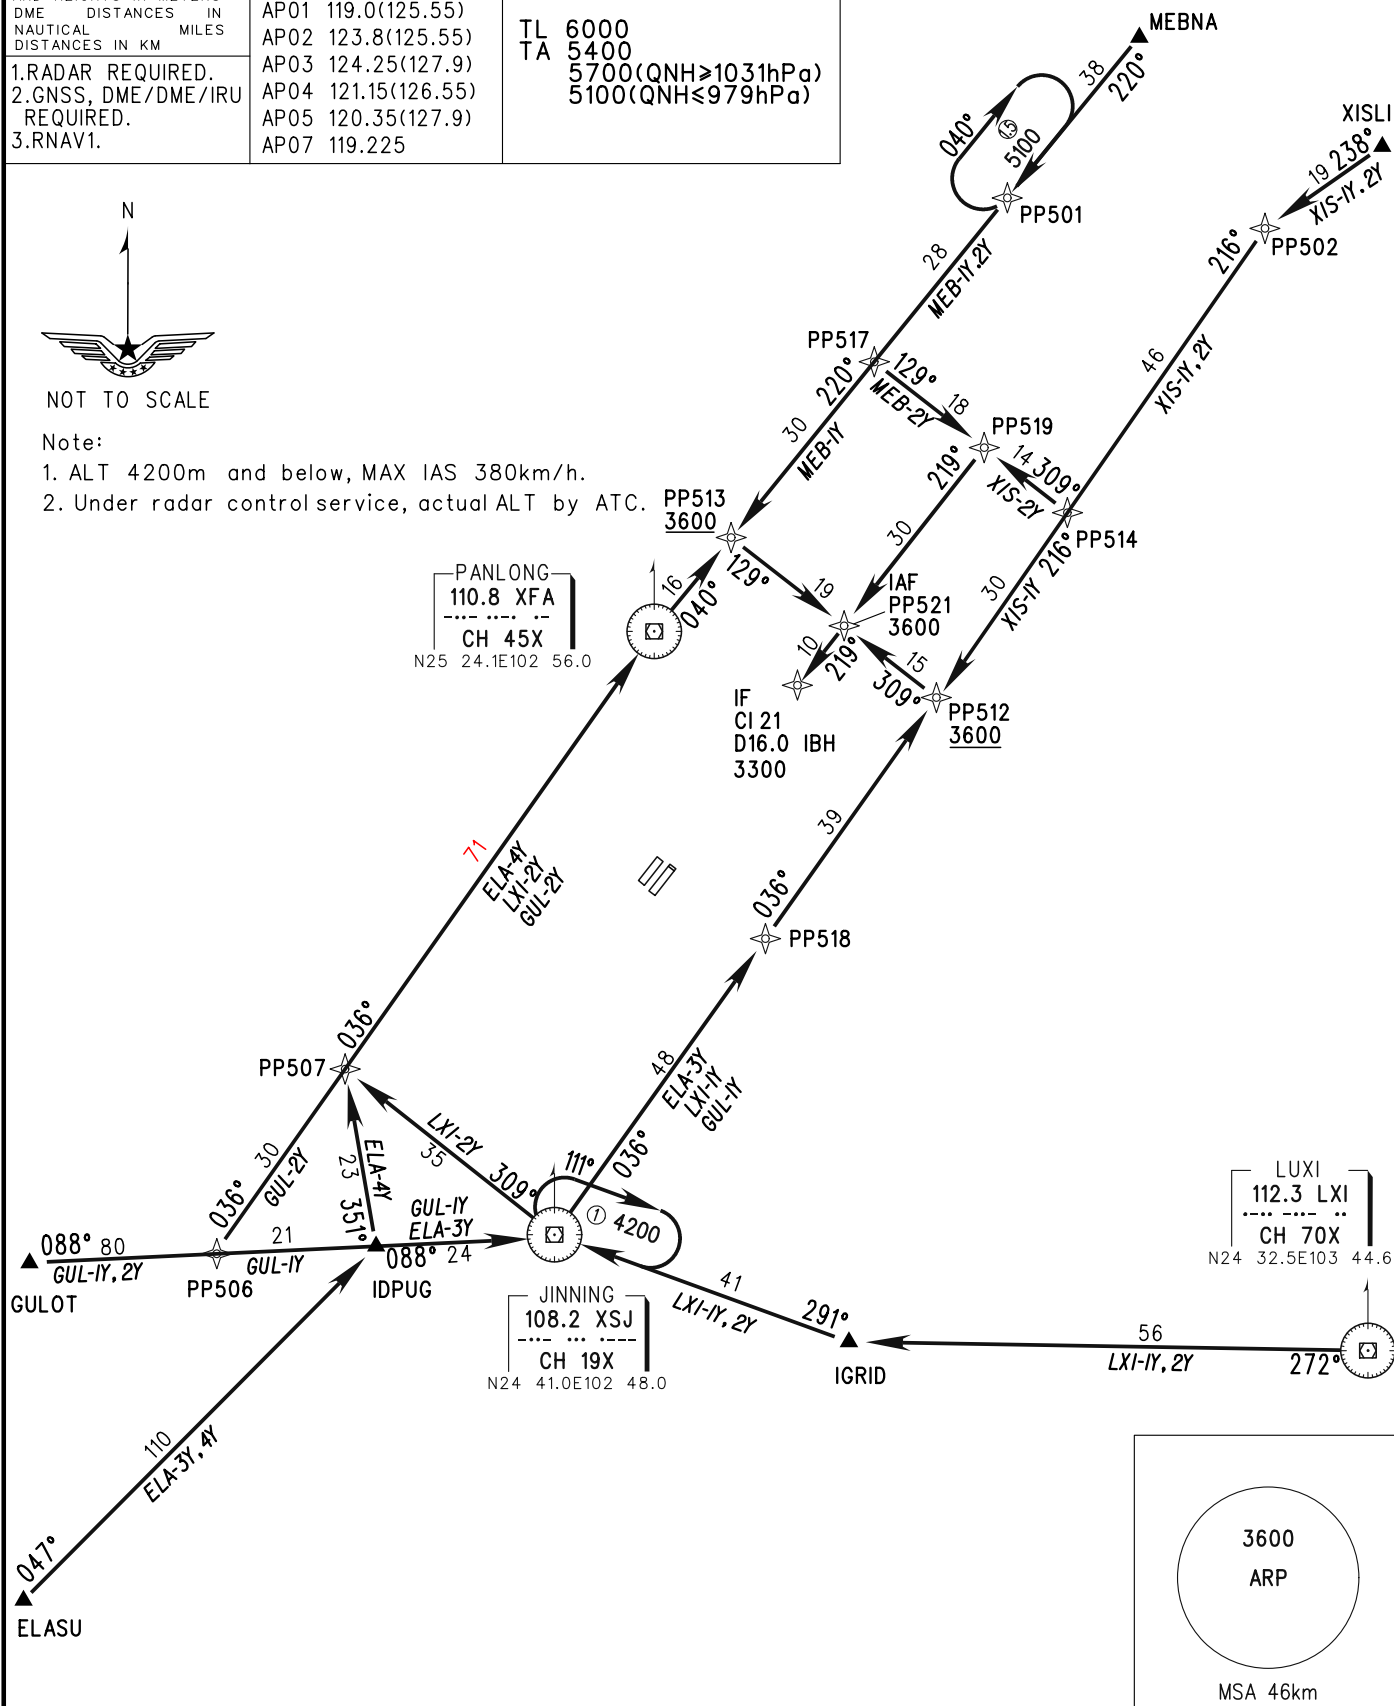

Changes: D-ATIS, delete PP511, distance of PP507-XFA.