


# STANDARD DEPARTURE CHART-INSTRUMENT

D-ATIS 127.45(DEP)  
TWR 130.35(118.05)(E)  
VAR2° W 118.45(130.35)(W)

ZGSZ SHENZHEN/Baoan


RWY16

BEARINGS ARE MAGNETIC  
ALTITUDES, ELEVATIONS  
AND HEIGHTS IN METERS  
DME DISTANCES IN  
NAUTICAL MILES  
DISTANCES IN KM



Zhuhai APP(R) TM01 120.35(127.95)  
TM02 124.25(126.0)  
TM03 123.85(126.0)  
TM04 124.75(127.95)  
TM05 119.025(119.55)

TL 3600(QNH<980hPa)  
3300(QNH>980hPa)  
TA 2700

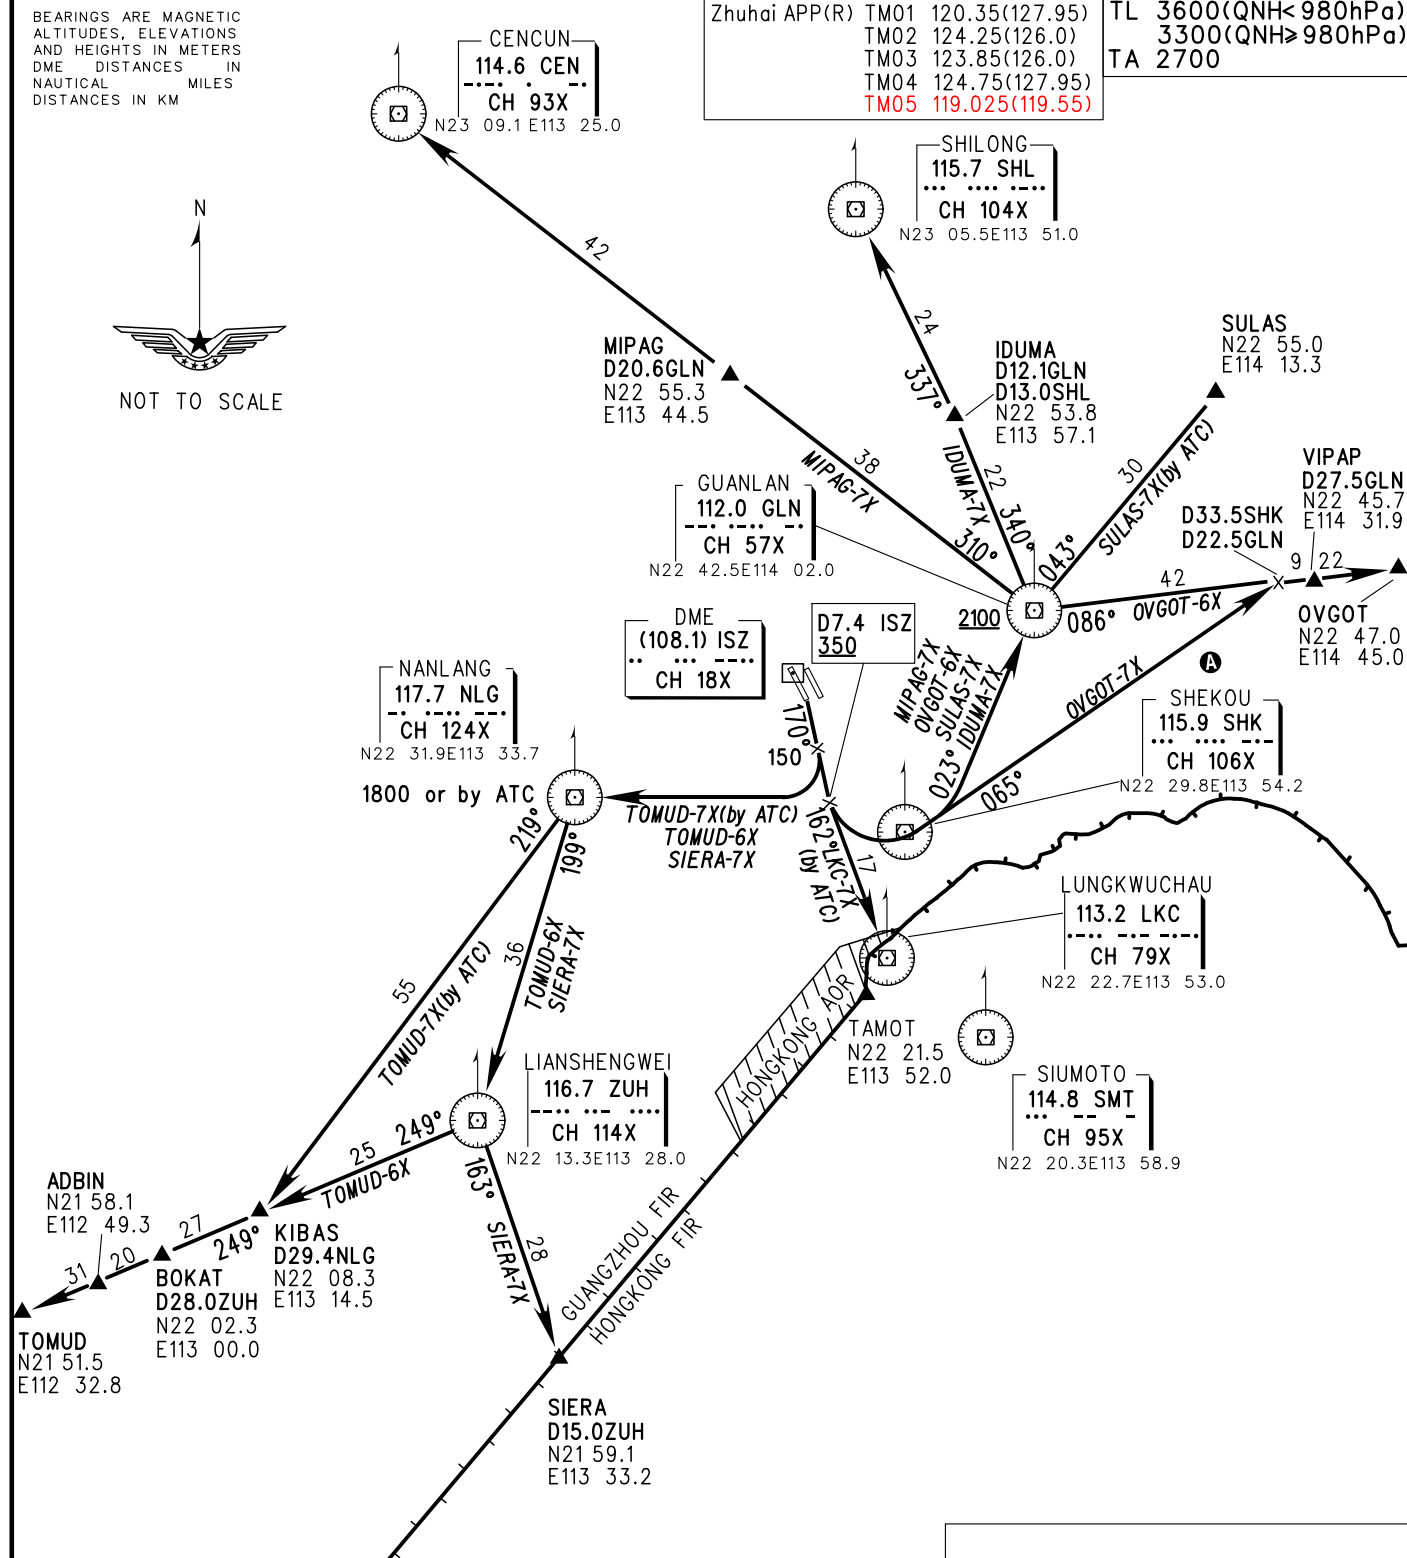

- Note:**
- ① Deviation to south of R065° SHK is forbidden for OVGOT-6X/7X, SULAS-7X, IDUMA-7X, MIPAG-7X.
  - ② Departure turn MAX IAS 425km/h.
  - ③ When two RWYs used for independent departure, SULAS-7X, IDUMA-7X, OVGOT-6X/7X, LKC-7X, MIPAG-7X need ATC clearance.
  - Ⓐ Deviation to south is forbidden.

Changes: APP.

