
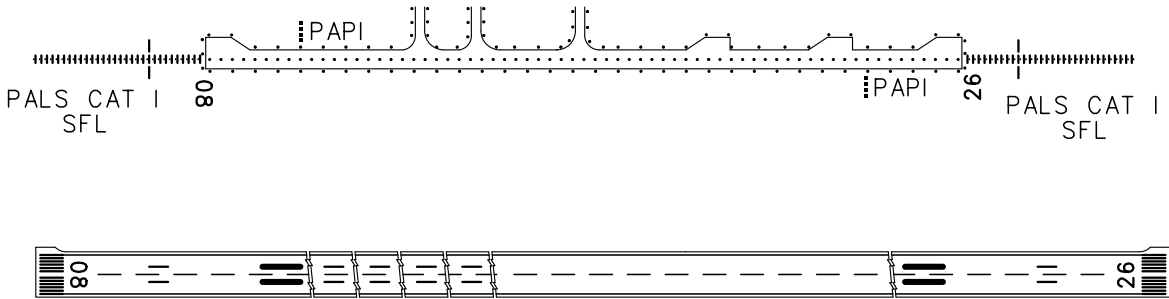


BEARINGS ARE MAGNETIC  
ALTITUDES, DISTANCES,  
ELEVATIONS AND HEIGHTS  
IN METERS

RWY	Direction	Bearing strength(PCN)
08	084°	RWY: PCN 73/F/B/W/T TWY A,B,C: PCN 75/F/B/W/T TWY H: PCN 70/R/B/W/T TWY F: PCN 64/R/B/W/T Stands Nr.01-05,301-304: PCN 64/R/B/W/T Stands Nr.06-14: PCN 70/R/B/W/T Stands Nr.101-102: PCN 74/R/B/W/T
26	264°	

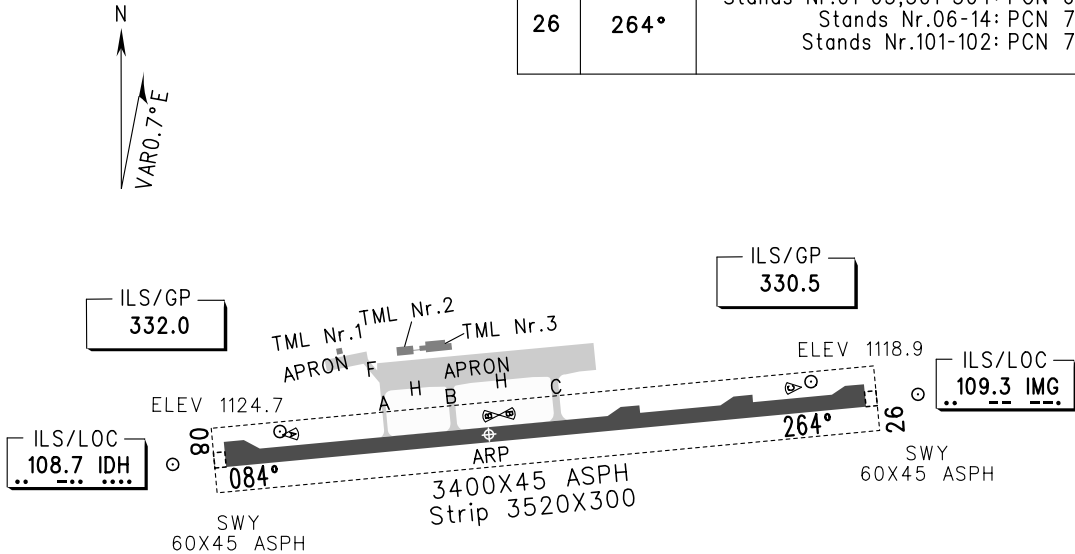

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)						LIGHTS	
ACFT Type		RWY08		RWY26		RWY08	RWY26
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A	RVR400 VIS800	RVR500 VIS800	RVR400 VIS800	RVR500 VIS800	PALS CAT I SFL PAPI REDL RCLL	PALS CAT I SFL PAPI REDL RCLL
	B						
	C						
	D						
Other 1&2 ENG							
Note:							

Changes: Apron.