
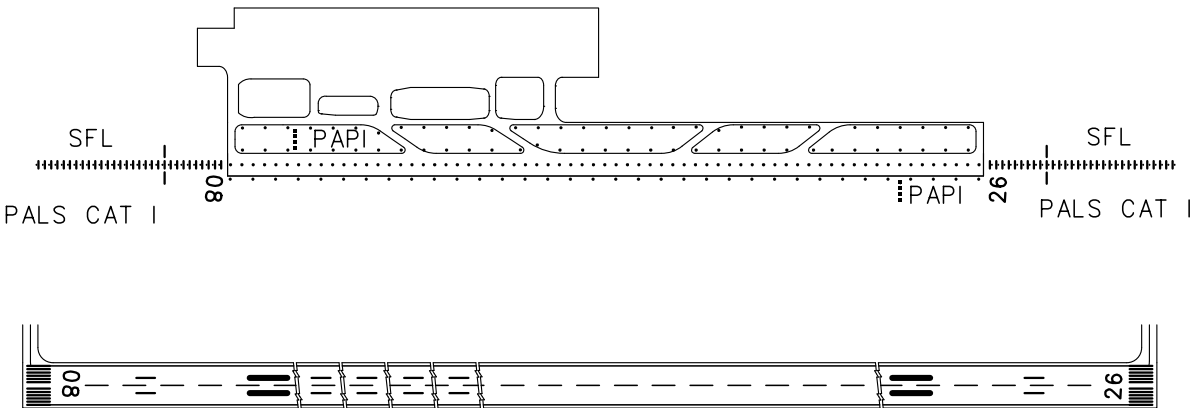



RWY	Direction	Bearing strength(PCN)	
08	077°	RWY:	74/R/B/W/T
		TWY A:	73/R/B/W/T
		TWY C, E, Stands Nr.9-17,25-32,12A:	72/R/B/W/T
		TWY D, G:	71/R/B/W/T
26	257°	TWY B, F, N, Stands Nr.33-52:	70/R/B/W/T
		TWY H:	45/R/B/W/T
		Stands Nr.1-8,18-24,1A:	44/R/B/W/T
		TWY K, Stands Nr.61-70:	41/R/B/W/T

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

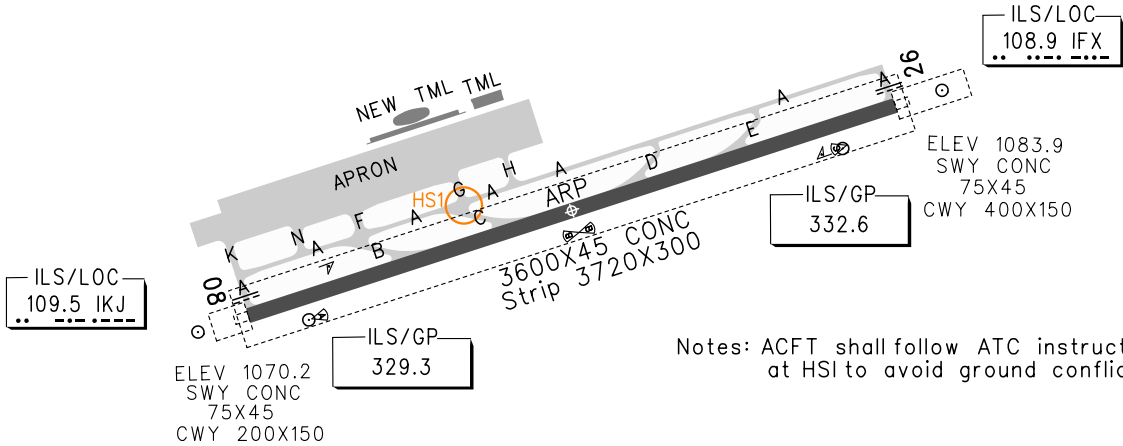

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)						LIGHTS	
ACFT Type		RWY08		RWY26		RWY08	RWY26
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A	RVR400 VIS800	RVR500 VIS800	RVR400 VIS800	RVR500 VIS800	PALS CAT I SFL PAPI REDL RCLL	PALS CAT I SFL PAPI REDL RCLL
	B						
	C						
	D						
Other 1&2 ENG		VIS1600					
Note:							
Changes: APN.							