


INSTRUMENT APPROACH CHART-ICAO

VAR5.8° W
AERODROME ELEV 4
RWY34L THR ELEV 3.4

D-ATIS 127.85
TWR01 118.8(118.325) 17L/35R, 17R/35L
TWR02 118.4(118.725) 16L/34R, 16R/34L
TWR03 124.35(118.325) 17L/35R
TWR04 118.575(118.725) 16R/34L

ZSPD SHANGHAI/Pudong
RNAV
CAT-II/IIIA ILS/DME x RWY34L

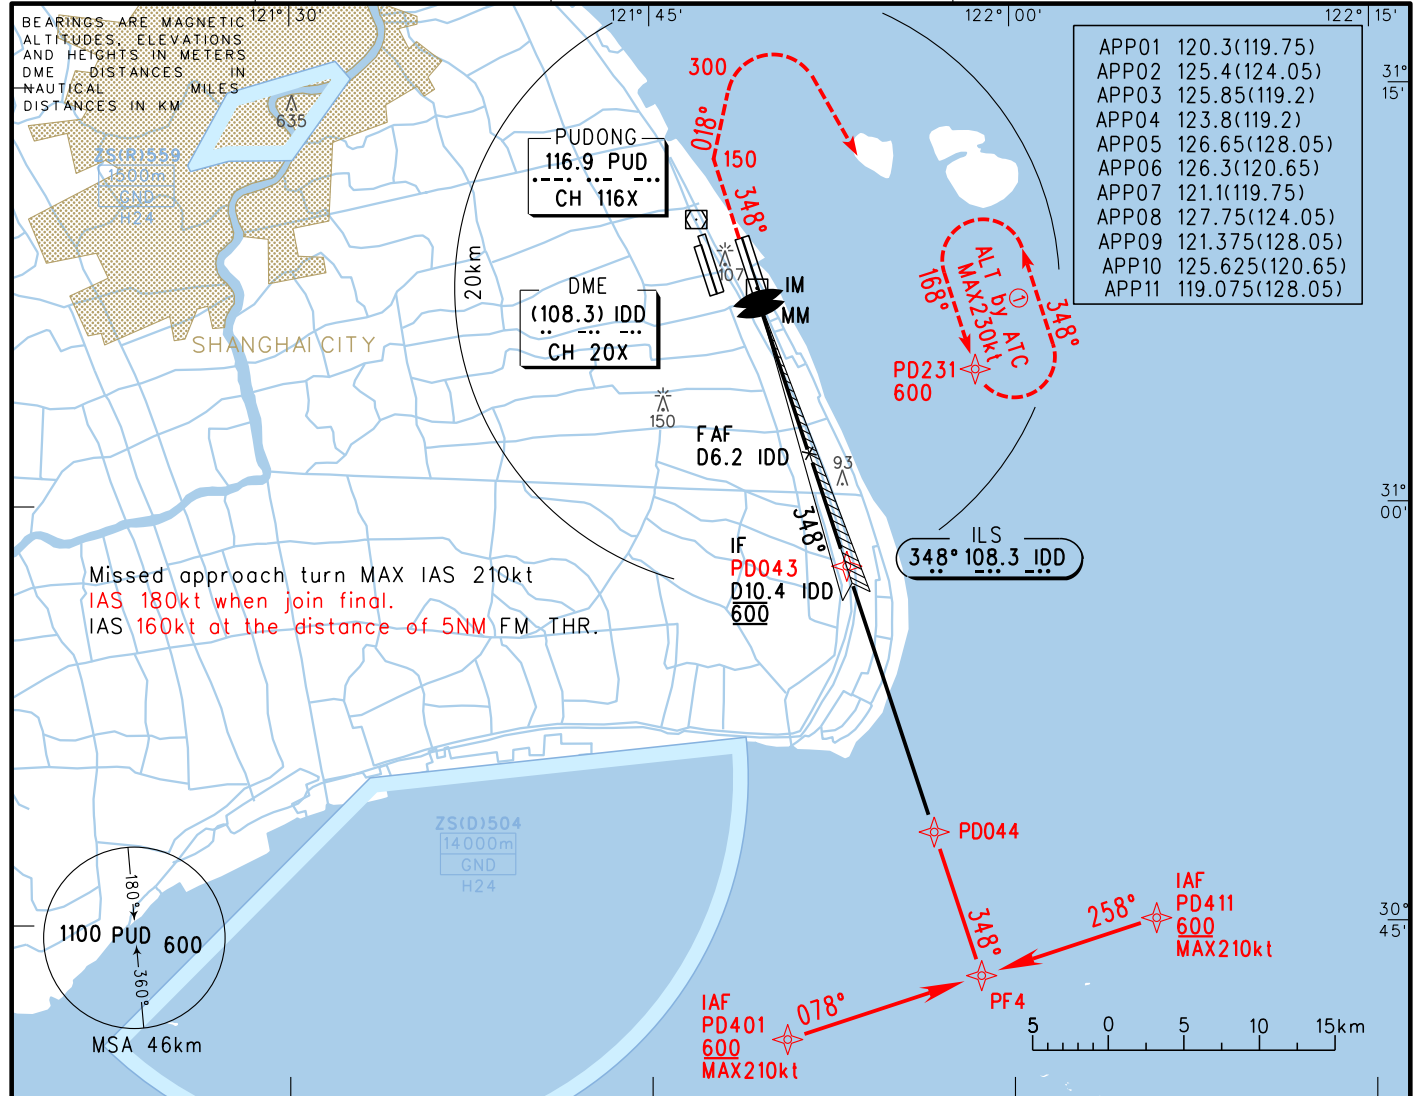


GP INOP	DME (NM)						
	ALT (m)						

MISSED APPROACH

Climb straight ahead to 150,
turn RIGHT on track 018° to
300, then turn RIGHT to PD231
at 600, join the holding pattern,
follow the ATC instructions.

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)

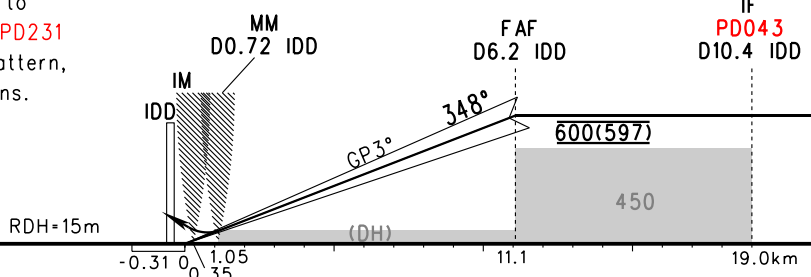

ILS CAT II				
Aircraft type	Decision height (DH)	Radio altimeter	Autopilot to DH and below	Manual operation below DH
A,B,C	(30)	(31)	RVR300	RVR300
D			RVR300	RVR350
ILS CAT IIIA				
Aircraft type	Decision height (DH)	Radio altimeter	RVR	
A,B,C,D	(15)	(15)	RVR175	

FAF - THR 11.1km							
GS in kt	80	100	120	140	160	180	
min:sec	4:30	3:36	3:00	2:34	2:15	2:00	
Rate of descent m/s	2.2	2.7	3.2	3.8	4.3	4.9	

Changes: Procedure, Missed approach.