D-ATIS 126.65 AP01 123.85(127.95) AP02 119.6(127.95) TWR 118.25(118.85)

ZYTL DALIAN/Zhoushuizi

RNAV RWY10(KARPI,SANKO)


VAR7°W

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

1. RADAR REQUIRED 2. RNAV 1 3. GNSS REQUIRED TL 3600 TA 3000 3300(QNH≥1031hPa) 2700(QNH≤979hPa)



TL202: MAX IAS 230kt (For SANKO-09D, KARPI-08D,09D)

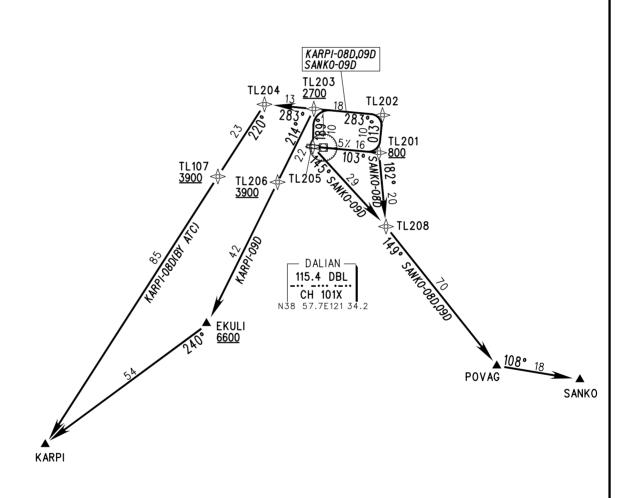

 SID
 ROUTING
 SID
 ROUTING

 SANKO-08D
 TL201-TL208-POVAG-SANKO
 KARPI-08D
 TL201-TL202-TL203-TL204-TL107-KARPI

 SANKO-09D
 TL201-TL202-TL203-TL205-TL208-POVAG-SANKO
 KARPI-09D
 TL201-TL202-TL203-TL206-EKULI-KARPI

DBL ←2⁷⁰°
1100

MSA 46km

Note: 1.A close-in obstacle:1959m on 098° of ARP, altitude 46.5m.

2.When aircraft ALT is 3000m or below, MAX IAS is 250kt

Changes: Nil.