
TELEGRAPHIC ADDRESS
AFTN: ZBBBYOYX
COMM: CIVIL AIR BEIJING
FAX: 8610 67347230

PEOPLE'S REPUBLIC OF CHINA
CIVIL AVIATION ADMINISTRATION OF CHINA
AERONAUTICAL INFORMATION SERVICE
P. O. BOX 2272, BEIJING

AIP CHINA
Supplement
Nr. 31/19
Jul. 15, 2019

大连/周水子

DALIAN/Zhoushuizi

大连/周水子机场新建 E 滑行道, 为了便于飞行机组识别, 特出版此补充资料, 请机组在起飞和落地时注意。具体生效时间依据航行通告。有关资料共 4 页附后。

New TWY E put into use in DALIAN/Zhoushuizi airport. This supplement is published for flight crews to distinguish the area, exercise caution while landing and taking off. Effective time by NOTAM. A total of 4 pages about relevant information with regard to the airport and flight procedures are attached herewith.

校核单:

ZYTL AD2-SUP-1/2
ZYTL AD2.24-1/2

Checklist:

ZYTL AD2-SUP-1/2
ZYTL AD2.24-1/2

AD 2.1 机场地名代码和名称 Aerodrome location indicator and name

ZYTL—大连/周水子 DALIAN/Zhoushuizi

ZYTL AD 2.8 停机坪、滑行道及校正位置数据 Aprons, taxiways and check locations data

1	停机坪道面和强度 Apron surface and strength	Surface: Cement concrete PCN 72/R/B/W/T (Stands Nr.134-144,138R,142R) PCN 69/R/B/W/T (Stands Nr.27, 28, 27L, 27R, 101-106, 127-133, 206, 207, 211) Strength: PCN 68/R/B/W/T (Stands Nr.24-26, 201, 202) PCN 61/R/B/W/T (Stands Nr.19-23) PCN 58/R/B/W/T (Stands Nr.203-205, 208-210, 212-220, 212R, 214L) PCN 49/R/B/W/T (Stands Nr.11-18, 145-147)
2	滑行道宽度、道面和强度 Taxiway width, surface and strength	Width: 30.5m: A(eastern); 27m: G; 23m: A(western), B, C, D, F, main A Surface: Cement concrete : main A Asphalt: A(western), A(eastern), B, C, D, F, G PCN 61/R/B/W/T: main A Strength: PCN 68/F/B/W/T: A(western), A(eastern), B, C, D, F PCN 80/F/B/W/T: G
3	高度表校正点的位置及其标高 ACL location and elevation	Nil
4	VOR/INS 校正点 VOR/INS checkpoints	Nil
5	备注 Remarks	Nil

ZYTL AD 2.9 地面活动引导和管制系统与标识

Surface movement guidance and control system and markings

1	航空器停放位置识别符号、滑行道引导线、航空器目视停靠/停放位置引导系统的使用 Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	Taxiing guidance signs at all intersections with TWY and RWY and at all holding positions. Guide lines at apron. Nose-in guidance at aircraft stands.	
2	跑道和滑行道标志及灯光 RWY and TWY marking and LGT	RWY markings	RWY designations, THR, TDZ, center line, edge line, aiming point
		RWY lights	Center line, edge line, THR, RWY end
		TWY markings	Center line, edge line, TWY holding positions, No-entry
		TWY lights	Edge line, center line, RWY guard lights
3	停止排灯 Stop bars	Nil	
4	备注 Remarks	RWY guard lights (configuration A) on TWY A(western), A(eastern), B, C.	

ZYTL AD 2.13 公布距离 Declared distances

跑道代号 RWY Designator	可用起飞滑跑距离 TORA (m)	可用起飞距离 TODA (m)	可用加速停止距离 ASDA (m)	可用着陆距离 LDA (m)	备注 Remarks
1	2	3	4	5	6
10	3300	3300	3350	3100	
28	3300	3300	3350	3000	
28	3170	3170	3220	3000	FM B
28	3070	3070	3120	3000	FM C
Remarks:					

ZYTL AD 2.15 其它灯光,备份电源 Other lighting, secondary power supply

1	机场灯标/识别灯标位置、特性和工作时间 ABN/IBN location, characteristics and hours of operation	Nil
2	着陆方向指示器位置和灯光;风速表位置和灯光 LDI location and LGT, Anemometer location and LGT	Nil
3	滑行道边灯和中心线灯光 TWY edge and center line lighting	Blue TWY edge lights, one-way TWY center line lights on TWY D, F, G, two-way TWY center line lights on TWY A, C.
4	备份电源/转换时间 Secondary power supply/switch-over time	Secondary power supply available/ 15 sec
5	备注 Remarks	Nil

D-ATIS 126.65
TWR 118.25(118.85)
GND 121.65
Delivery 121.85(DCL AVBL)



ZYTL DALIAN/Zhoushuizi

N38°58.0'E121°32.4' ELEV 33m

AERODROME CHART

RWY	Direction	Bearing strength(PCN)	
10	103°	TWY G RWY, A(western), A(eastern), B, C, D, F	80/F/B/W/T
28	283°	main TWYA	61/R/B/W/T


BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

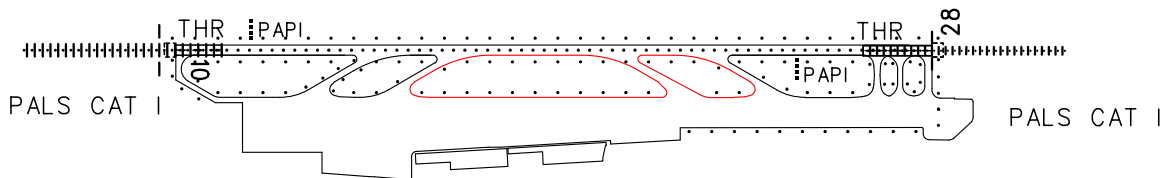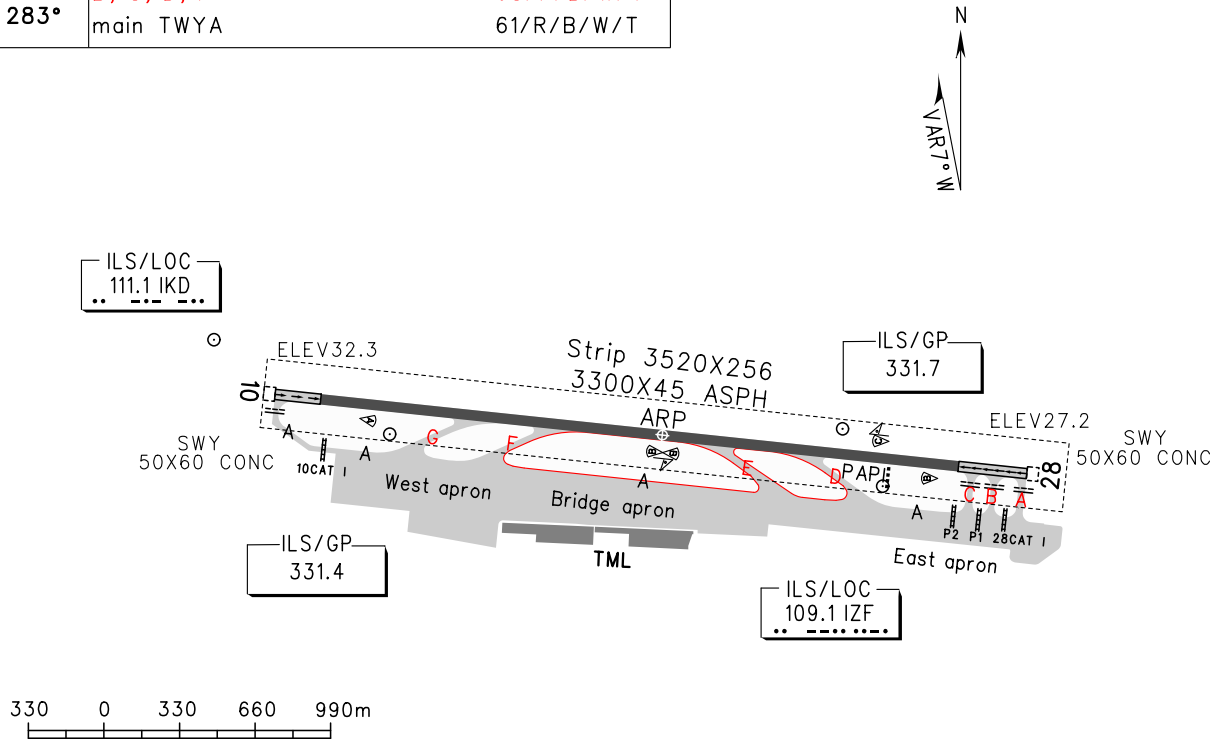

Remarks:

THR10 displaced 200m inwards
THR28 displaced 300m inwards

Displaced THR

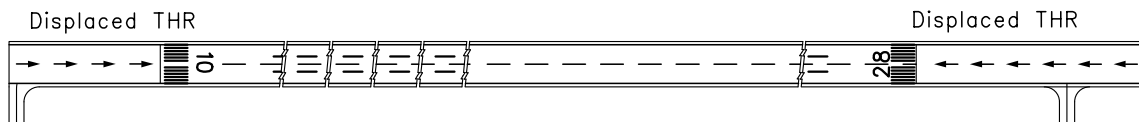

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS	
ACFT Type	RWY10		RWY28		RWY10	RWY28
	REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A				PALS CAT I SFL PAPI REDL RCLL	PALS CAT I SFL PAPI REDL RCLL
	B	RVR 400	RVR 500	RVR 400		
	C	VIS 800	VIS 800	VIS 800		
	D					
Other 1&2 ENG	VIS 1600					

Note:RWY28 take-off climb gradient 5.5% or with no limits when VIS>5000m and ceiling>280m.


Changes: New TWY E, TWY number.

AIRCRAFT-PARKING CHART-ICAO

D-ATIS 126.65
TWR 118.25(118.85)
GND 121.65
Delivery 121.85(DCL AVBL)

ZYTL DALIAN/Zhoushuizi

Bearing strength(PCN)	
Stands Nr.134-144,138R,142R	PCN 72/R/B/W/T
Stands Nr.27, 28, 27L, 27R, 101-106, 127-133, 206, 207, 211	PCN 69/R/B/W/T
Stands Nr.24-26, 201, 202	PCN 68/R/B/W/T
Stands Nr.19-23	PCN 61/R/B/W/T
Stands Nr.203-205, 208-210, 212-220, 212R, 214L	PCN 58/R/B/W/T
Stands Nr.11-18, 145-147	PCN 49/R/B/W/T

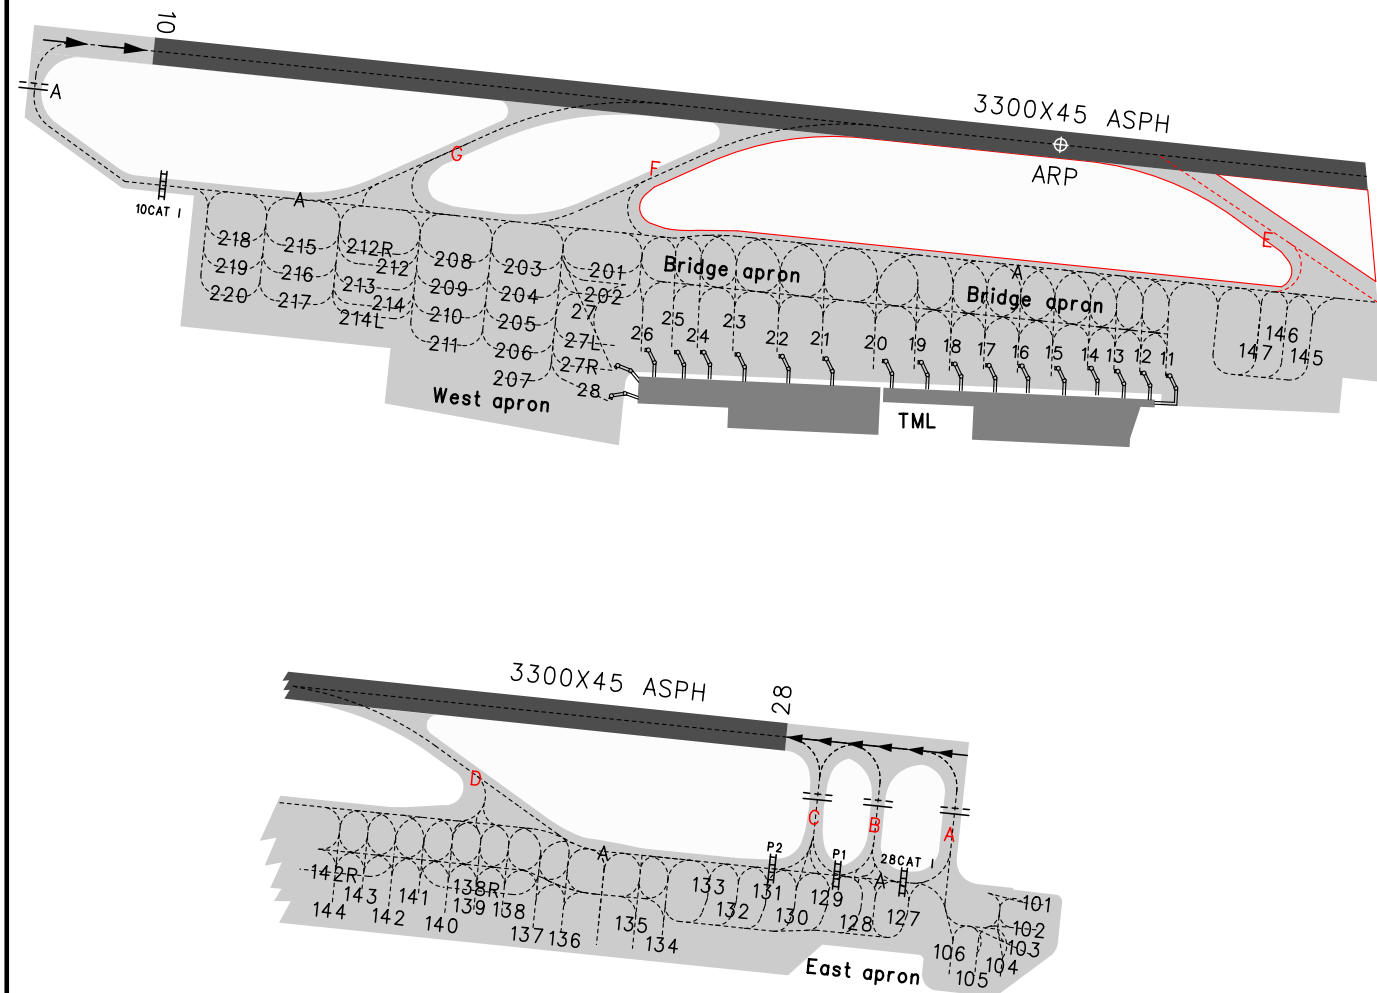

Changes: New TWY E, TWY number.