

AERODROME CHART


D-ATIS 127.4
GND 121.85(DCL AVBL)
TWR 118.7(118.1)

ZYHB HARBIN/Taiping

N45° 37.5'E126° 15.1' ELEV 139m

RWY	Direction	Bearing strength(PCN)	
05	049°	TWY A1, A3, A5, A6:	PCN 96/F/B/X/T
		TWY A2:	PCN 95/F/B/X/T
23	229°	TWY B1-B5, B14-B16, C, C1-C5, G, H, J, N, S, S1, S2, U, U1, U2.	
		Stands 301-305, 543-545:	PCN 95/R/B/W/T
		Stands 30-48, 528-532:	PCN 83/R/B/W/T
		Stands 541, 542:	PCN 82/R/B/W/T
		RWY&TWY A, A0, A7, A8:	PCN 78/F/B/W/T
		TWY B, B6-B8, B11-B13, T, T1, T2.	
		Stands 500, 501, 508-514, 533-540, 701-712:	PCN 74/R/B/W/T
		Stands 502-507, 521-527:	PCN 65/R/B/W/T
		TWY B9, B10. Stands 515-520:	PCN 62/R/B/W/T

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

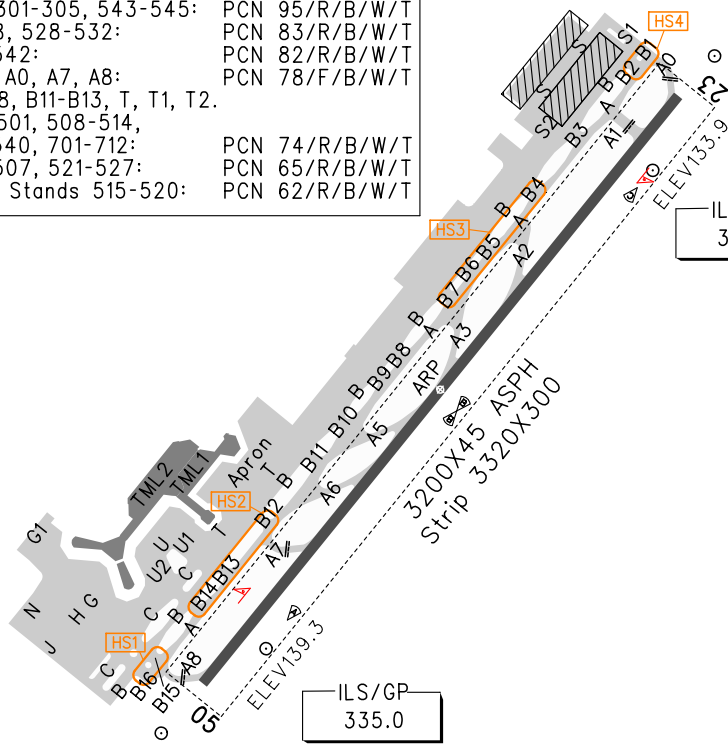


ILS/LOC
110.3 ILL

ILS/GP
333.8

ILS/GP
335.0

ILS/LOC
109.9 IMJ

320 0 320 640 960m

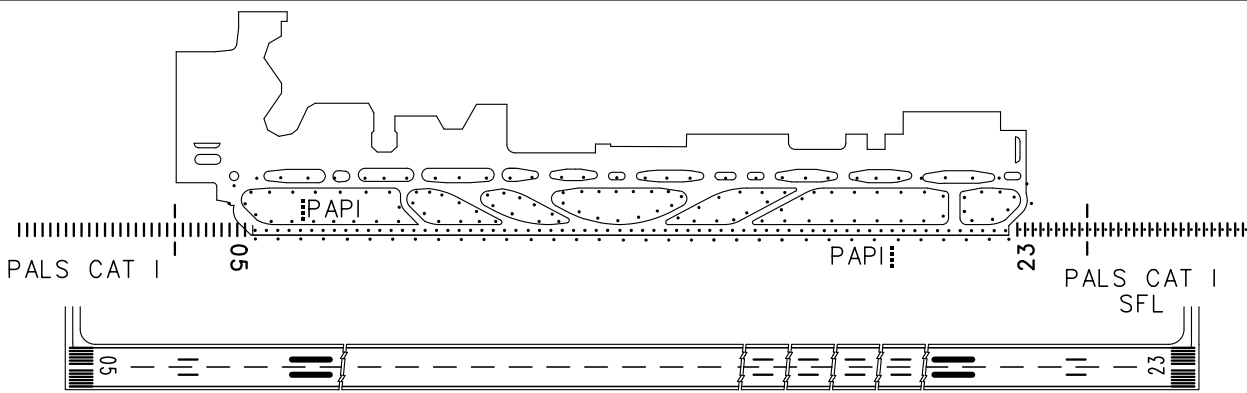

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS		
ACFT Type	RWY05		RWY23		RWY05	RWY23	
	REDL	NIL(Day only)	REDL	NIL(Day only)			
2 TURB ENG or 3&4 ENG	A	RVR400	RVR500	RVR400	RVR500	PALS CAT I REDL RCLL PAPI	PALS CAT I REDL RCLL PAPI SFL
	B						
	C						
	D						
Other 1&2 ENG	VIS1600						
Note:							
Changes: New WDI.							