

# AERODROME CHART



ATIS 126.45  
TWR 118.15(118.85)  
GND 121.7(DCL AVBL)  
APN 121.6

**ZJSY SANYA/Phoenix**

N18° 18.1'E109° 24.8' ELEV 28.5m

RWY	Direction	Bearing strength(PCN)
08	083°	TWY D(west of TWY B7): 98/R/B/W/T
		TWY D(east of TWY B7), Apron(stands Nr.109-118): 91/R/B/W/T
		Business apron (stands Nr.901-909, 903L, 903R): 85/R/B/W/T
		Stand Nr.101: 83/R/B/W/T
		Apron(stands Nr.310-320,501-513, 601-611), RWY, TWY B,B2,B3,B5-B9,C: 80/R/B/W/T
26	263°	TWY A3,A6: 79/R/B/W/T
		TWY A4,A5: 78/R/B/W/T
		TWY A2,B4: 77/R/B/W/T
		TWY A,A1(S of TWY B),A7: 75/R/B/W/T
		TWY A1(N of TWY B),stands Nr.301-309: 68/R/B/W/T
		Apron(stands Nr.102-108): 65/R/B/W/T

BEARINGS ARE MAGNETIC  
ALTITUDES, DISTANCES,  
ELEVATIONS AND HEIGHTS  
IN METERS

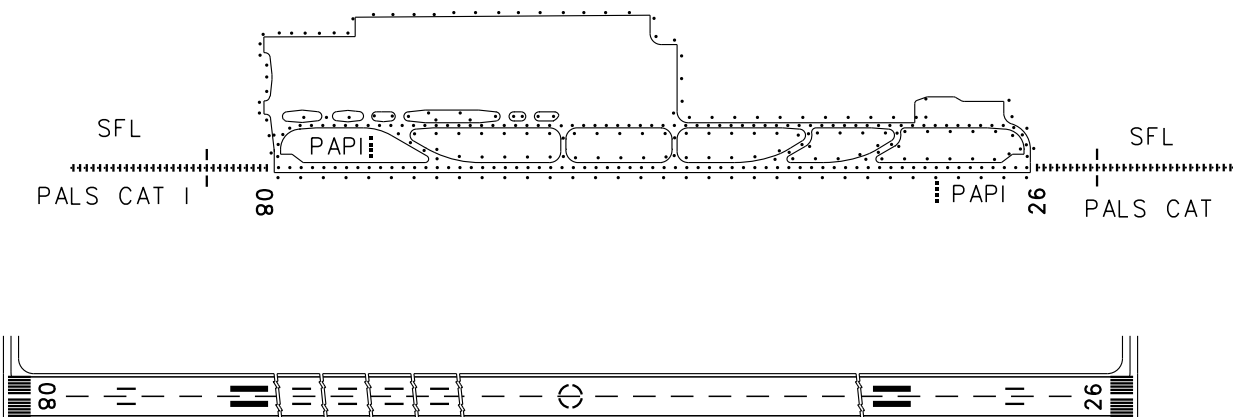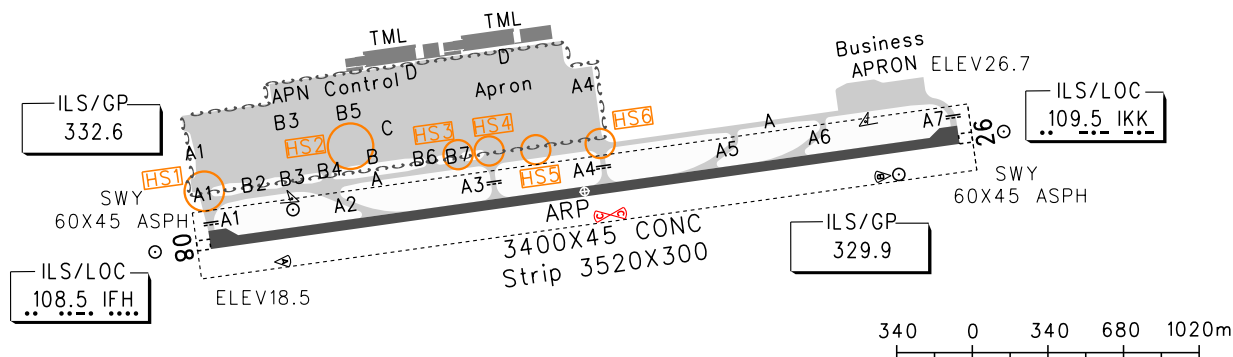

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS		
ACFT Type		RWY08		RWY26		RWY08	RWY26
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A	RVR400 VIS800	RVR500 VIS800	CEILING300 VIS5000	PALS CAT I SFL PAPI REDL RCLL	PALS CAT I SFL PAPI REDL RCLL	
	B						
	C						
	D						
Other 1&2 ENG		VIS1600					
Note:							
Changes: RVR, VIS.							