

STANDARD DEPARTURE CHART-INSTRUMENT

VAR 4° W

ATIS 128.45
APP01 120.275(124.2)
APP02 126.35(124.2)
APP03 124.825(124.2)
TWR(12R/30L) 118.3(118.85)

ZHCC ZHENGZHOU/Xinzheng


RNAV RWY12R

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM



TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)

1. RNAV 1
2. GNSS, DME/DME/IRU REQUIRED
3. RADAR REQUIRED

1. RNP 1
2. GNSS REQUIRED



Departure turn before DER is strictly forbidden

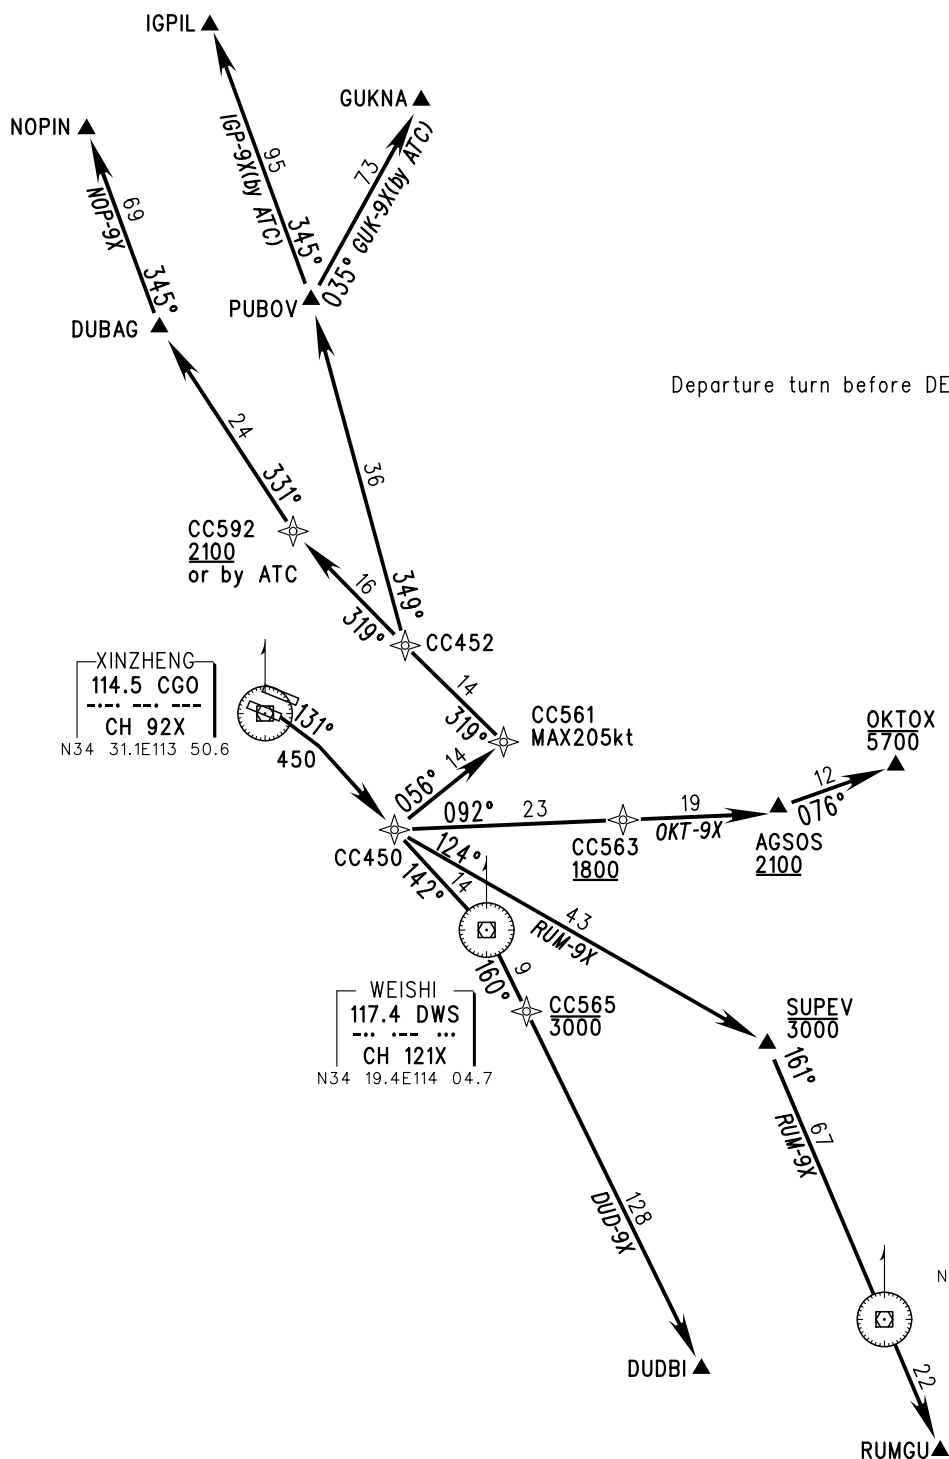

Changes: New chart.