

AERODROME CHART



TWR 123.15(130.0)

ZSYN YANCHENG/Nanyang

N33°25.5'E120°12.1' ELEV 3m

RWY	Direction	Bearing strength(PCN)	
04	043°	RWY04(0-2200m inward THR):	PCN 52/R/B/W/T
		RWY04(2200-2350m inward THR):	PCN 48/F/B/W/T
		RWY04(2350-2800m inward THR):	PCN 53/R/B/W/T
22	223°	TWY A(north of D):	PCN 53/R/B/W/T
		TWY A(south of D),D:	PCN 50/R/B/W/T

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

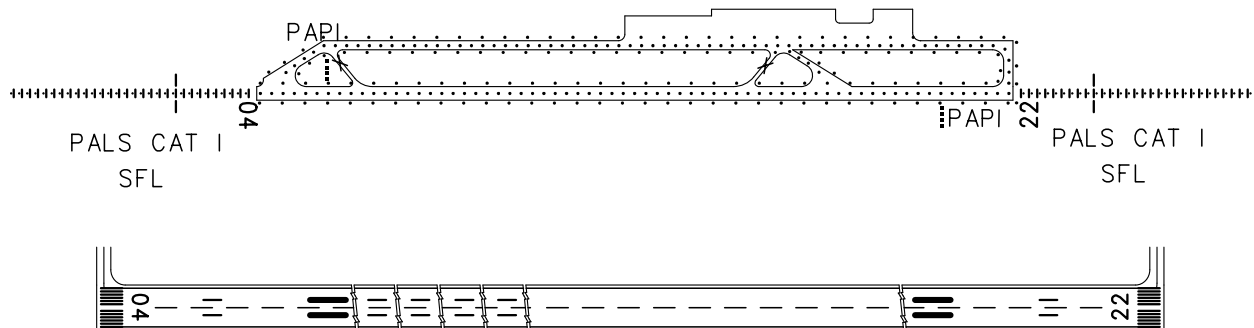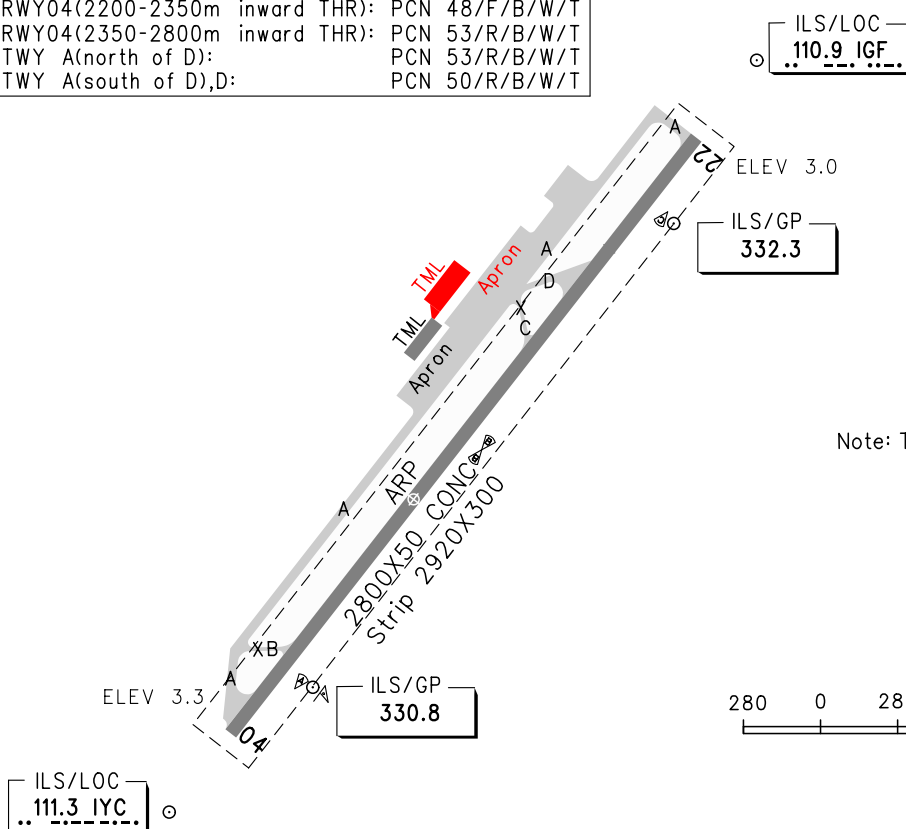

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS		
ACFT Type		RWY04		RWY22		RWY04	RWY22
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A	RVR500 VIS800		RVR500 VIS800		PALS CAT I SFL PAPI REDL RCLL	PALS CAT I SFL PAPI REDL RCLL
	B						
	C						
	D						
Other 1&2 ENG		Nil					
Note:							
Changes: TML, apron.							