

STANDARD DEPARTURE CHART-INSTRUMENT

VAR2° W


ZGGG
GUANGZHOU/Baiyun
RNAV RWY02R

BEARINGS ARE MAGNETIC ALTITUDES,ELEVATIONS
AND HEIGHTS IN METERS DME DISTANCES IN
NAUTICAL MILES DISTANCES IN KM

D-ATIS 127.0
APP 126.55(127.75)/AP01
119.70(127.75)/AP02
126.35(119.60)/AP03
121.05(124.20)/AP04
120.40(124.20)/AP05
121.175(127.75)/AP06
TWR 118.25(130.0, **118.875**) for RWY02R/20L

TL 3600(QNH<980hPa)
3300(QNH≥980hPa)
TA 2700


- | | |
|------------------------------|------------------|
| 1. RNAV 1 | 1. RNP1 |
| 2. GNSS,DME/DME/IRU REQUIRED | or |
| 3. RADAR REQUIRED | 2. GNSS REQUIRED |



YINGDE
113.5 YIN
CH 82X
N24 11.4E113 24.9

Notes:

1. Under radar control service, actual flight ALT instructed by ATC.
2. Departure turn to LEFT after take-off shall be permitted by ATC.
3. Turning is forbidden until DER.

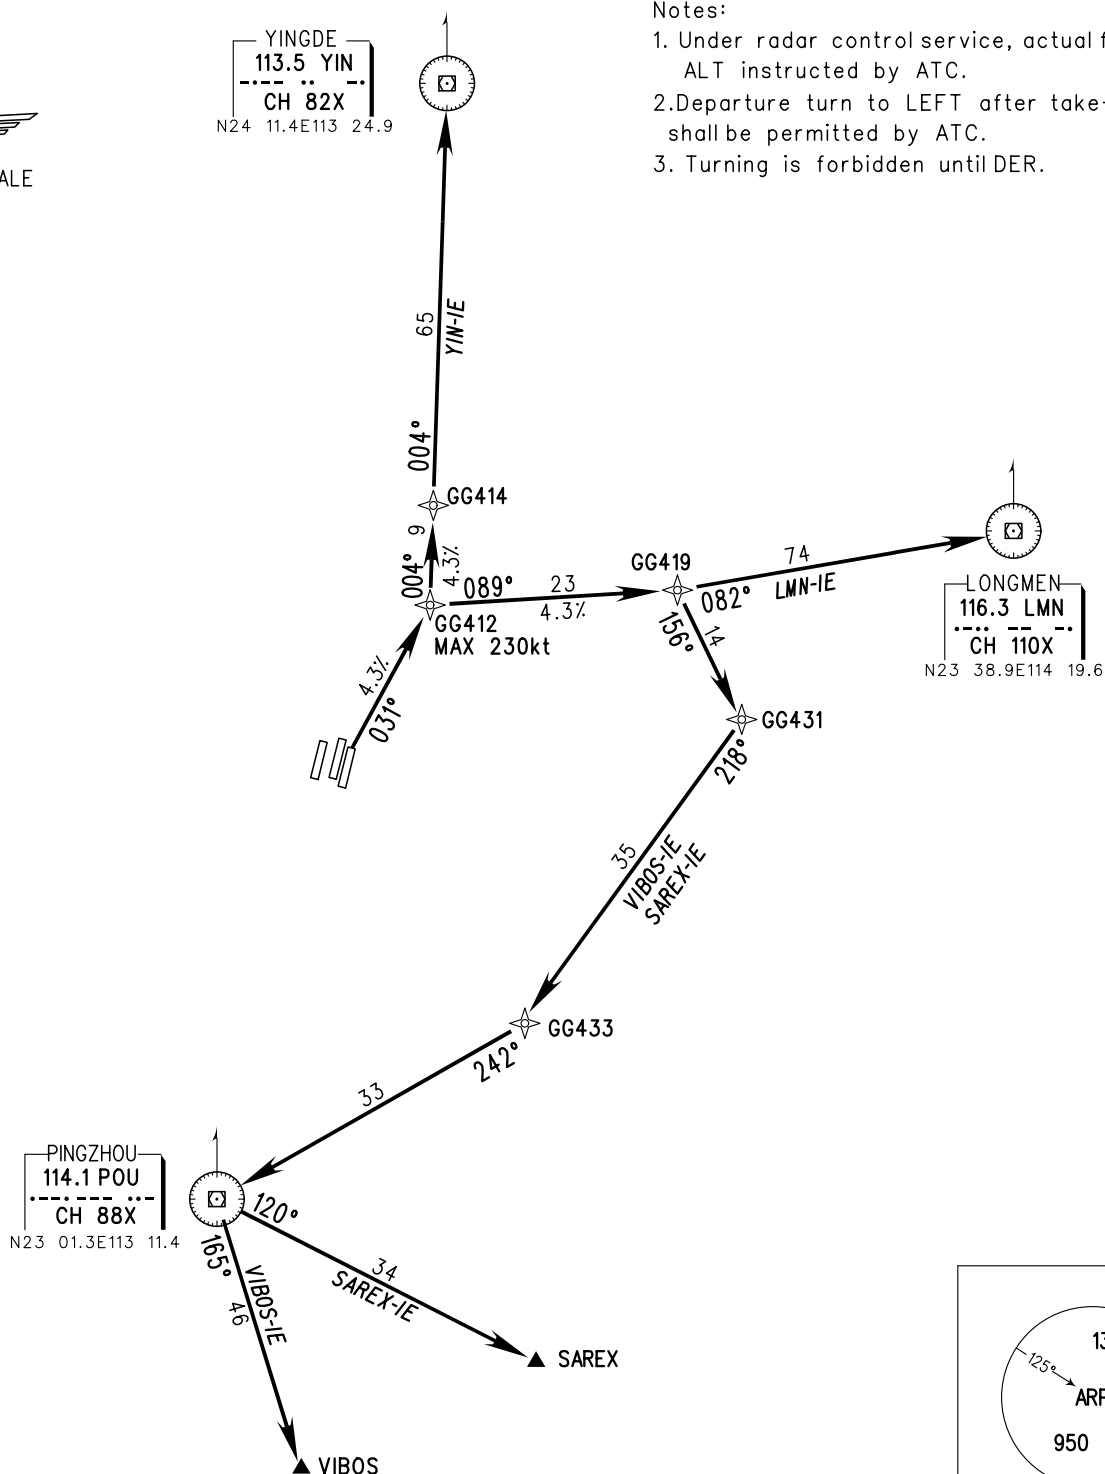

Changes: TWR secondary FREQ.