

STANDARD ARRIVAL CHART-INSTRUMENT

VAR1° W

ZPPP KUNMING/Changshui

RNAV RWY04

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM


1.RADAR REQUIRED.
2.GNSS, DME/DME/IRU
REQUIRED.
3.RNAV1.

D-ATIS 128.45

TWR(E) 118.1(118.85)

AP01 119.0(125.55)
AP02 123.8(125.55)
AP03 120.35(127.9)
AP04 121.15(126.55)
AP05 124.25(127.9)
AP07 119.225


TL 6000
TA 5400
5700(QNH≥1031hPa)
5100(QNH≤979hPa)



NOT TO SCALE

Note:

1. ALT 4200m and below, MAX IAS 380km/h.
2. Under radar control service, actual ALT by ATC.

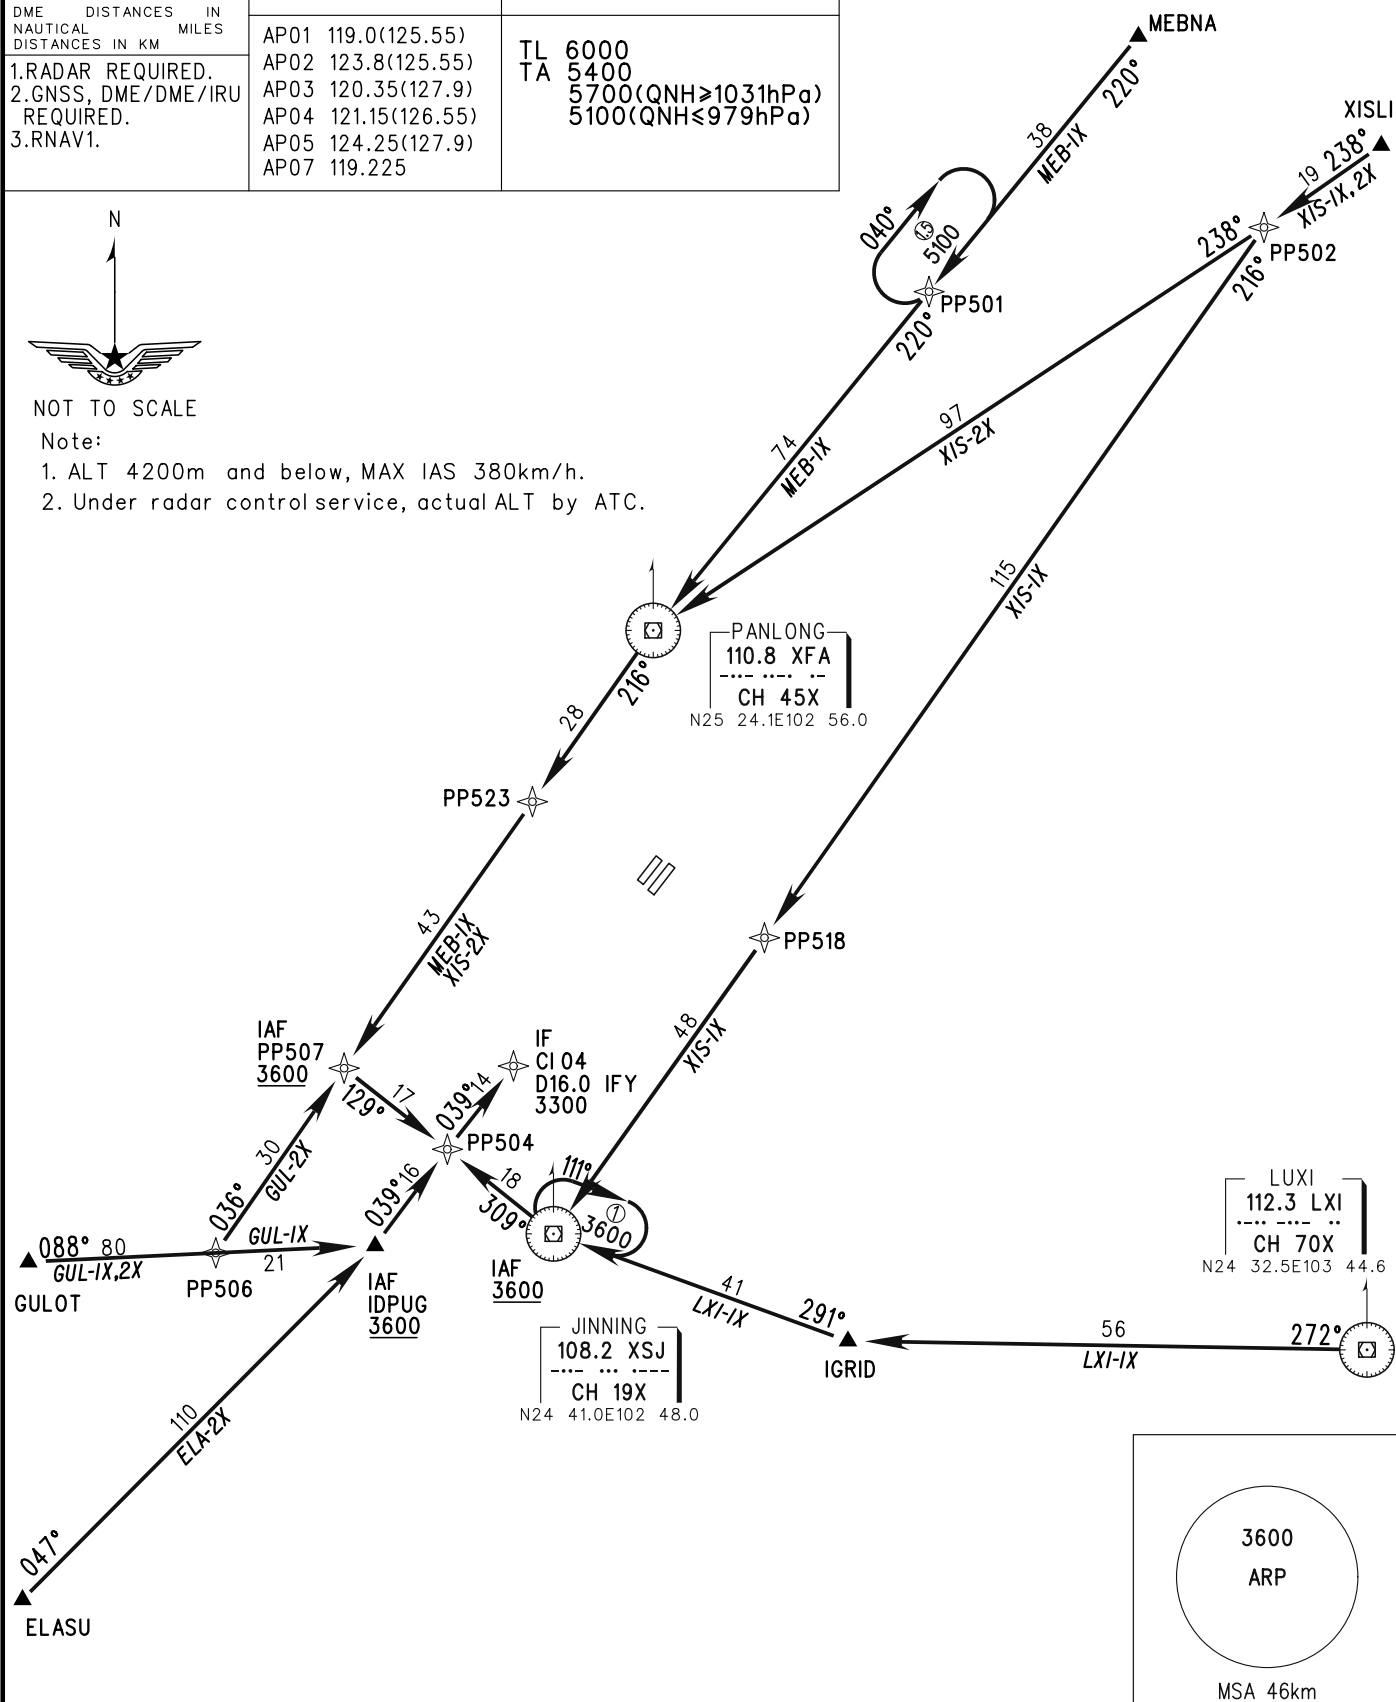

Changes: D-ATIS