BLYNKautoation.ino

```
#define BLYNK_TEMPLATE_ID "TMPL30ivTLQ9v"
#define BLYNK_TEMPLATE_NAME "LED"
#define BLYNK_AUTH_TOKEN "_f6ZWfUM3gYyntxJ65_EOUH0ELIxwgfS"
#define BLYNK_PRINT Serial
#include <ESP8266WiFi.h>
#include <BlynkSimpleEsp8266.h>
#define RelayPin1 5 //D1
#define RelayPin2 4 //D2
#define RelayPin3 14 //D5
#define RelayPin4 12 //D6
char auth[] = BLYNK_AUTH_TOKEN;
char ssid[] = "Redmi Note 11";//type our SSID from mobile
char pass[] = "snjb@123";//type our password
// This function is called every time the Virtual Pin 0 state changes
BLYNK_WRITE(V0)
{
 int value = param.asInt();
 value ? digitalWrite(RelayPin1, HIGH) : digitalWrite(RelayPin1, LOW);  }
 BLYNK_WRITE(V2)
{
 int value = param.asInt();
 value ? digitalWrite(RelayPin2, HIGH) : digitalWrite(RelayPin2, LOW);  }
BLYNK_WRITE(V1)
{
 int value = param.asInt();
 value ? digitalWrite(RelayPin3, HIGH ) : digitalWrite(RelayPin3, LOW);  }
```

Fig. 9: Code snippet setting SSID, BLYNK auth

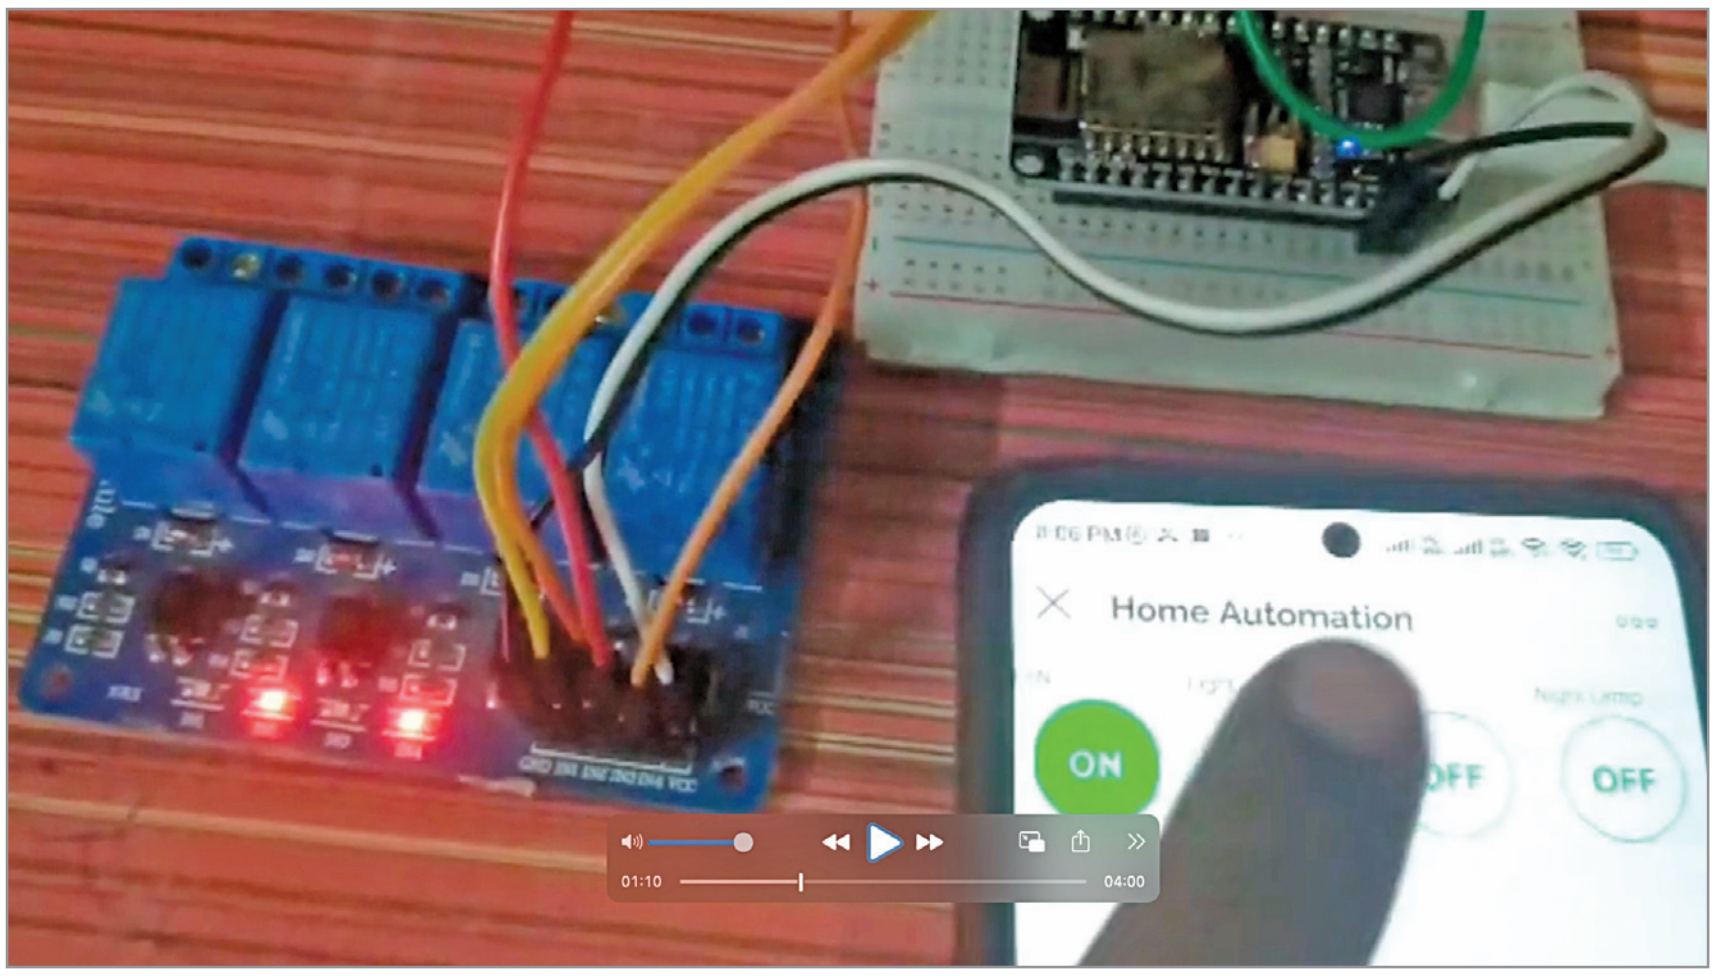

Fig. 10: Author's prototype showing Blynk controlling the device

ESP8266 library, as in the code snippet in Fig. 9.

Construction and testing

Assemble the circuit based on the circuit diagram (refer to Fig. 2 and Tables 2 and 3). After proper assembling, power the device with 5V.

Open the Blynk app, and you can control the relay using the Blynk dashboard from any device: phone, tablet, or laptop. Fig. 10 shows the author's final prototype demonstrating Blynk controlling the device. EFY

Nilesh Ramesh Thakre is Head of the Department at SNJB's Shri H.H.J.B Polytechnic Chandwad, Dept. of Electronics and Telecommunication Engineering

EFY Note
The source code of this project is available for free download at *www.electronicsforu.com*