

with a normal operating voltage of 2.2V and a maximum operating voltage of 2.7V. The threshold current values are 15mA (min),

20mA (normal), and 30mA (max), and the operating current ranges from 65mA to 80mA. The beam angle deviation is approximately

+ 3 degrees for both parallel and perpendicular conditions, and the beam divergence ranges from 8 to 12 degrees (parallel) and 23 to 32 degrees (perpendicular).

A block diagram of the setup is shown in Fig. 2. While the device will operate without an internet connection for actions like triggering a buzzer, but the intrusion data will not be recorded on the Google Sheet without an active connection.

Features and technical specifications of the receiver module used

The ISO 203 is a 3-pin sensor, a compact light sensor (receiver) diode with an integrated amplifier and an open-collector transistor at its output. As an open-collector transistor, it requires a pull-up

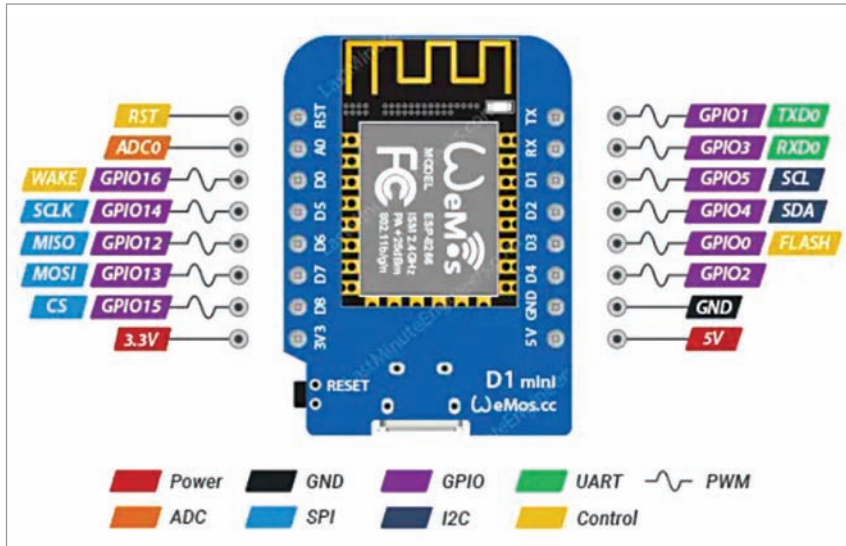


Fig. 5: WeMos pin details



Fig. 6: Obtaining Google sheet ID

```
// WiFi credentials
char ssid[] = "*****"; // Put your ID name
char pass[] = "*****"; // Put your password here

// Google Sheets script ID and host
String GAS_ID = "AKfycbXoH32SgHt1usVQmYtV0SvS-0yJmB8uB8t8sPOSDynVGJLexG0b"; // Spreadsheet sc
const char* host = "script.google.com";

bool laserState = false; // Variable to hold the state of the LASER Rx
void setup() {
  Serial.begin(9600);

  // Define pin modes
  pinMode(DETECT, INPUT); // Set laser receiver pin as input
  pinMode(ACTION, OUTPUT); // Set action pin as output

  // Connect to WiFi
  Serial.print("Connecting");
  WiFi.begin(ssid, pass); // Connect to your WiFi router
  while (WiFi.status() != WL_CONNECTED)
  {
    Serial.print(".");
    delay(1000);
  }
}
```

Fig. 7: Snippet of the source code