

Classification Level: Top secret () Secret () Internal () Public (☒)

Rockchip User Guide RKNN-Toolkit EN

(Technology Department, Graphic Display Platform Center)

| | | |
|---|----------------|------------|
| Mark: [<input type="checkbox"/>] Editing [<input checked="" type="checkbox"/>] Released | Version | V1.2.0 |
| | Author | Rao Hong |
| | Completed Date | 2019-08-21 |
| | Reviewer | Randall |
| | Reviewed Date | 2019-08-21 |

福州瑞芯微电子股份有限公司

Fuzhou Rockchip Electronics Co., Ltd

(Copyright Reserved)

Revision History

| Version | Modifier | Date | Modify description | Reviewer |
|---------|--------------|------------|---|----------|
| V0.1 | Yang Huacong | 2018-08-25 | Initial version | Randall |
| V0.9.1 | Rao Hong | 2018-09-29 | Added user guide for RKNN-Toolkit, including main features, system dependencies, installation steps, usage scenarios, and detailed descriptions of each API interface. | Randall |
| V0.9.2 | Randall | 2018-10-12 | Optimize the way of performance evaluation | Randall |
| V0.9.3 | Yang Huacong | 2018-10-24 | Add instructions of connection to development board hardware | Randall |
| V0.9.4 | Yang Huacong | 2018-11-03 | Add instructions of docker image | Randall |
| V0.9.5 | Rao Hong | 2018-11-19 | 1. Add an npy file as a usage specification for the quantized rectified data 2. The instructions of pre-compile parameter in build interface 3. Improve the instructions of reorder_channel parameter in the config interface | Randall |
| V0.9.6 | Rao Hong | 2018-11-24 | 1. Add the instructions of get_perf_detail_on_hardware and get_run_duration interfaces 2. Update the instructions of RKNN initialization interface | Randall |

| Version | Modifier | Date | Modify description | Reviewer |
|----------|----------|------------|---|----------|
| V0.9.7 | Rao Hong | 2018-12-29 | <ol style="list-style-type: none"> 1. Interface optimization: delete the instructions of get_run_duration, get_perf_detail_on_hardware 2. Rewrite the instructions of eval_perf interface 3. Rewrite the instructions of RKNN() interface 4. Add instructions of the init_runtime interface | Randall |
| V0.9.7.1 | Rao Hong | 2019-01-11 | <ol style="list-style-type: none"> 1. Solve the bug that the program may hang after multiple calls to inference 2. Interface adjustment: init_runtime does not need to specify host, the tool will automatically determine | Randall |
| V0.9.8 | Rao Hong | 2019-01-30 | <ol style="list-style-type: none"> 1. New feature: if set verbose parameter to True when init RKNN object, users can fetch detailed log information. | Randall |
| V0.9.9 | Rao Hong | 2019-03-06 | <ol style="list-style-type: none"> 1. New feature: add eval_memory interface to check memory usage when model running. 2. Optimize inference interface; Optimize error message. 3. Add description for API interface: get_sdk_version. | Randall |

| Version | Modifier | Date | Modify description | Reviewer |
|---------|----------|------------|---|----------|
| V1.0.0 | Rao Hong | 2019-05-06 | <ol style="list-style-type: none"> 1. Add async mode for init_runtime interface. 2. Add input passthrough mode for inference interface. 3. New feature: hybrid quantization. 4. Optimize initialize time of pre-compiled model. Pre-compiled model generated by RKNN-Toolkit-v1.0.0 can not run on device installed old driver (NPU driver version < 0.9.6), and pre-compiled model generated by old RKNN-Toolkit (version < 1.0.0) can not run on device installed new NPU driver (NPU driver version == 0.9.6). 5. Adjust the shape of the inference results: Before version 1.0.0, if the output of the original model is arranged in "NHWC" (such as TensorFlow models), the tool will convert the result to "NCHW"; starting from version 1.0.0, this conversion will not be done, but keep consistent with the original model. | Randall |
| V1.1.0 | Rao Hong | 2019-06-28 | <ol style="list-style-type: none"> 1. Support TB-RK1808S0 AI Compute Stick. 2. New interface: list_devices, used to query devices connected to PC or RK3399Pro Linux development board. 3. Support run on ARM64 platform with python 3.5. 4. Support run on Windows / Mac OS X. | |

| Version | Modifier | Date | Modify description | Reviewer |
|---------|----------|------------|---|----------|
| V1.2.0 | Rao Hong | 2019-08-21 | <ol style="list-style-type: none"> 1. Add support for model with multiple inputs. 2. New feature: batch inference. 3. New feature: model segmentation. 4. New feature: custom op. | |

Rockchip

Table of Contents

| | | |
|----------|--|----------|
| 1 | Overview | 1 |
| 2 | Requirements/Dependencies | 4 |
| 3 | User Guide | 5 |
| 3.1 | Installation | 5 |
| 3.1.1 | Install by pip command | 5 |
| 3.1.2 | Install by the Docker Image..... | 6 |
| 3.2 | Usage of RKNN-Toolkit..... | 7 |
| 3.2.1 | Scenario 1: Inference for Simulation on PC..... | 7 |
| 3.2.2 | Scenario 2: Inference on RK3399Pro (or RK1808 or TB-RK1808S0 AI Compute Stick) connected with PC..... | 10 |
| 3.2.3 | Scenario 3: Inference on RK3399Pro Linux development board | 11 |
| 3.3 | Hybrid Quantization | 11 |
| 3.3.1 | Instructions of hybrid quantization..... | 12 |
| 3.3.2 | Hybrid quantization profile | 12 |
| 3.3.3 | Usage flow of hybrid quantization..... | 13 |
| 3.4 | Model Segmentation..... | 15 |
| 3.5 | Example | 16 |
| 3.6 | RKNN-Toolkit API description | 19 |
| 3.6.1 | RKNN object initialization and release | 19 |
| 3.6.2 | Loading non-RKNN model | 20 |
| 3.6.3 | RKNN model configuration | 23 |
| 3.6.4 | Building RKNN model | 24 |
| 3.6.5 | Export RKNN model..... | 26 |
| 3.6.6 | Loading RKNN model..... | 27 |

| | | |
|--------|---|----|
| 3.6.7 | <i>Initialize the runtime environment</i> | 27 |
| 3.6.8 | <i>Inference with RKNN model</i> | 29 |
| 3.6.9 | <i>Evaluate model performance</i> | 31 |
| 3.6.10 | <i>Evaluating memory usage</i> | 35 |
| 3.6.11 | <i>Get SDK version</i> | 36 |
| 3.6.12 | <i>Hybrid Quantization</i> | 37 |
| 3.6.13 | <i>Export a segmentation model</i> | 39 |
| 3.6.14 | <i>List Devices</i> | 40 |
| 3.6.15 | <i>Register Custom OP</i> | 41 |

1 Overview

RKNN-Toolkit is a software development kit for users to perform model conversion, inference and performance evaluation on PC, RK3399Pro, RK1808, TB-RK1808S0 AI Compute Stick or RK3399Pro Linux development board users can easily complete the following functions through the provided python interface:

- 1) Model conversion: support to convert Caffe、TensorFlow、TensorFlow Lite、ONNX、Darknet model to RKNN model, support RKNN model import/export, which can be used on hardware platform later.
- 2) Quantization: support to convert float model to quantization model, currently support quantized methods including asymmetric quantization (asymmetric_quantized-u8) and dynamic fixed point quantization (dynamic_fixed_point-8 and dynamic_fixed_point-16). Starting with V1.0.0, RKNN-Toolkit began to support hybrid quantization. For a detailed description of hybrid quantization, please refer to Section 3.3.
- 3) Model inference: able to simulate running model on PC and obtain the inference results. Also able to run model on specific hardware platform RK3399Pro (or RK3399Pro Linux development board), RK1808, TB-RK1808 AI Compute Stick and obtain the inference results.
- 4) Performance evaluation: able to simulate running on PC and obtain the total time consumption and each layer's time consumption of the model. Also able to run model with on-line debugging method on specific hardware platform RK3399Pro, RK1808, TB-RK1808 AI Compute Stick or directly run on RK3399Pro Linux development board to obtain the total time consumption and each layer's time consumption when the model runs completely once on the hardware.
- 5) Memory evaluation: obtain the memory usage through on-line debugging method when the model is running on specific hardware platform such as RK3399Pro, RK1808, TB-RK1808 AI Compute Stick or RK3399Pro Linux development board.
- 6) Model pre-compilation: with pre-compilation techniques, model loading time can be reduced,

and for some models, model size can also be reduced. However, the pre-compiled RKNN model can only be run on a hardware platform with an NPU, and this feature is currently only supported by the x86_64 Ubuntu platform. RKNN-Toolkit supports the model pre-compilation feature from version V0.9.5, and the pre-compilation method has been upgraded in V1.0.0. The upgraded precompiled model is not compatible with the old driver.

- 7) Model segmentation: This function is used in a scenario where multiple models run simultaneously. A single model can be divided into multiple segments to be executed on the NPU, thereby adjusting the execution time of multiple models occupying the NPU, and avoiding other models because one model occupies too much execution time. RKNN-Toolkit supports this feature from version 1.2.0. This feature must be used on hardware with an NPU and the NPU driver version is greater than 0.9.8.
- 8) Custom OP: If the model contains an OP that is not supported by RKNN-Toolkit, it will fail during the model conversion phase. At this time, you can use the custom layer feature to define an unsupported OP so that the model can be converted and run normally. RKNN-Toolkit supports this feature from version 1.2.0. Please refer to the "Rockchip_Developer_Guide_RKNN_Toolkit_Custom_OP_CN" document for the use and development of custom OP.

Note: Some features are limited by the operating system or chip platform and cannot be used on some operating systems or platforms. The feature support list of each operating system (platform) is as follows:

| | Ubuntu 16.04/18.04 | Windows 7/10 | Debian 9.8 (ARM 64) | MacOS Mojave |
|---------------------------|-----------------------|--------------|------------------------|--------------|
| Model conversion | yes | yes | yes | yes |
| Quantization | yes | yes | yes | yes |
| Model inference | yes | yes | yes | yes |
| Performance evaluation | yes | yes | yes | yes |

| | | | | |
|-----------------------|-----|-----|-----|-----|
| Memory evaluation | yes | yes | yes | yes |
| Model pre-compilation | yes | no | no | no |
| Model segmentation | yes | yes | yes | yes |
| Custom OP | yes | no | no | no |
| Multiple inputs | yes | yes | yes | yes |
| Batch inference | yes | yes | yes | yes |
| List devices | yes | yes | yes | yes |
| Query SDK version | yes | yes | yes | yes |

2 Requirements/Dependencies

This software development kit supports running on the Ubuntu, Windows, Mac OS X or Debian operating system. It is recommended to meet the following requirements in the operating system environment:

Table 1 Operating system environment

| | |
|-----------------------------|--|
| Operating system version | Ubuntu16.04 (x64) or later Windows 7 (x64) or later Mac OS X 10.13.5 (x64) or later Debian 9.8 (x64) or later |
| Python version | 3.5/3.6 |
| Python library dependencies | 'numpy >= 1.16.1' 'scipy >= 1.1.0' 'Pillow >= 3.1.2' 'h5py >= 2.7.1' 'lmbd >= 0.92' 'networkx == 1.11' 'flatbuffers == 1.9', 'protobuf >= 3.5.2' 'onnx == 1.4.1' 'onnx-tf == 1.2.1' 'flask >= 1.0.2' 'tensorflow >= 1.11.0' 'dill==0.2.8.2' 'opencv-python>=3.4.3.18' 'ruamel.yaml==0.15.82' 'psutils>=5.6.2' |

Note:

1. Windows and Mac OS only support Python 3.6 currently.
2. This document mainly uses Ubuntu 16.04 / Python3.5 as an example. For other operating systems, please refer to the corresponding quick start guide:
<Rockchip_Quick_Start_RKNN_Toolkit_V1.2.0_EN.pdf>.

3 User Guide

3.1 Installation

There are two ways to install RKNN-Toolkit: one is via pip install command, the other is running docker image with full RKNN-Toolkit environment. The specific steps of the two installation ways are described below.

PS: The method of install RKNN-Toolkit on RK3399Pro Linux Develop Board is introduced on this link:

<http://t.rock-chips.com/wiki.php?mod=view&id=36>

3.1.1 Install by pip command

1. Create virtualenv environment. If there are multiple versions of the Python environment in the system, it is recommended to use virtualenv to manage the Python environment.

```
sudo apt install virtualenv
sudo apt-get install libpython3.5-dev
sudo apt install python3-tk

virtualenv -p /usr/bin/python3 venv
source venv/bin/activate
```

2. Install dependent libraries: TensorFlow and opencv-python

```
# Install tensorflow gpu
pip install tensorflow-gpu
# Install tensorflow cpu. Only one version of tensorflow can be installed.
pip install tensorflow
# Install opencv-python
pip install opencv-python
```

Note: RKNN-Toolkit itself does not rely on opencv-python, but the example will use this library to load image, so the library is also installed here.

3. Install RKNN-Toolkit

```
pip install package/rknn_toolkit-1.2.0-cp35-cp35m-linux_x86_64.whl
```

Please select corresponding installation package (located at the *package/* directory) according to different python versions and processor architectures:

- **Python3.5 for x86_64:** rknn_toolkit-1.2.0-cp35-cp35m-linux_x86_64.whl
- **Python3.5 for arm_x64:** rknn_toolkit-1.2.0-cp35-cp35m-linux_aarch64.whl
- **Python3.6 for x86_64:** rknn_toolkit-1.2.0-cp36-cp36m-linux_x86_64.whl
- **Python3.6 for arm_x64:** rknn_toolkit-1.2.0-cp36-cp36m-linux_aarch64.whl
- **Python3.6 for Windows x86_64:** rknn_toolkit-1.2.0-cp36-cp36m-win_amd64.whl
- **Python3.6 for Mac OS X:** rknn_toolkit-1.2.0-cp36-cp36m-macosx_10_9_x86_64.whl

3.1.2 Install by the Docker Image

In docker folder, there is a Docker image that has been packaged for all development requirements, Users only need to load the image and can directly use RKNN-toolkit, detailed steps are as follows:

1. Install Docker

Please install Docker according to the official manual:

<https://docs.docker.com/install/linux/docker-ce/ubuntu/>

2. Load Docker image

Execute the following command to load Docker image:

```
docker load --input rknn-toolkit-1.2.0-docker.tar.gz
```

After loading successfully, execute “docker images” command and the image of rknn-toolkit appears as follows:

| REPOSITORY | TAG | IMAGE ID | CREATED | SIZE |
|--------------|-------|--------------|-------------|--------|
| rknn-toolkit | 1.2.0 | f1416bfcd878 | 1 hours ago | 2.18GB |

3. Run image

Execute the following command to run the docker image. After running, it will enter the bash environment.

```
docker run -t -i --privileged -v /dev/bus/usb:/dev/bus/usb rknn-toolkit:1.2.0 /bin/bash
```

If you want to map your own code, you can add the “-v <host src folder>:<image dst folder>” parameter, for example:

```
docker run -t -i --privileged -v /dev/bus/usb:/dev/bus/usb -v /home/rk/test:/test rknn-toolkit:1.2.0 /bin/bash
```

4. Run demo

```
cd /example/mobilenet_v1  
python test.py
```

3.2 Usage of RKNN-Toolkit

Depending on the type of model and device, RKNN-Toolkit can be used in the following three kinds of scenarios, the usage flow in each scenario is described in detail in the following sections.

Note: for a detailed description of all the interfaces involved in the flow, refer to [Section 3.4](#).

3.2.1 Scenario 1: Inference for Simulation on PC

In this scenario, RKNN-Toolkit is running on PC. Users perform simulation for RK1808 with the model provided by the users to complete inference or performance evaluation.

Depending on the type of model, this scenario can be divided into two sub-scenarios: one scenario is that the model is a non-RKNN model, i.e. Caffe, TensorFlow, TensorFlow Lite, ONNX, Darknet model, and the other scenario is that the model is an RKNN model which is a proprietary model of Rockchip with the file suffix “rknn”.

Note: This scenario only supported on x86_64 Linux.

3.2.1.1 Sub-scenario 1: run the non-RKNN model

When running a non-RKNN model, the RKNN-Toolkit usage flow is shown below:

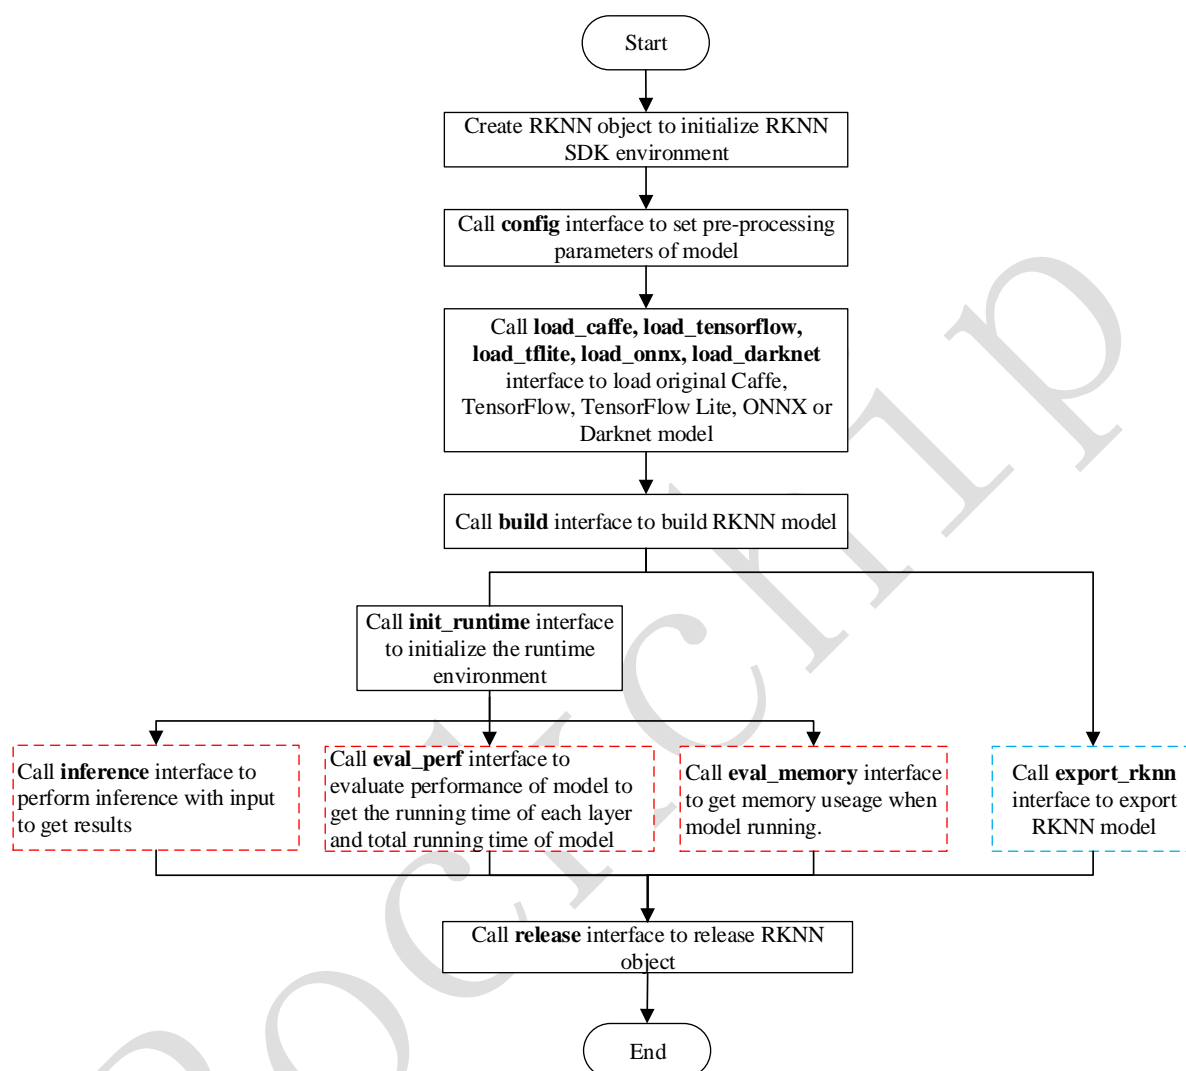


Figure 1 Usage flow of RKNN-Toolkit when running a non-RKNN model on PC

Note:

1. The above steps should be performed in order.
2. The model exporting step marked in the blue box is not necessary. If you exported, you can use load_rknn to load it later on.
3. The order of model inference, performance evaluation and memory evaluation steps marked in red box is not fixed, it depends on the actual demand.
4. Only when the target hardware platform is RK1808, TB-RK1808S0 AI Compute Stick, RK3399Pro or RK3399Pro Linux, we can call eval_memory interface.

3.2.1.2 Sub-scenario 2: run the RKNN model

When running an RKNN model, users do not need to set model pre-processing parameters, nor do they need to build an RKNN model, the usage flow is shown in the following figure.

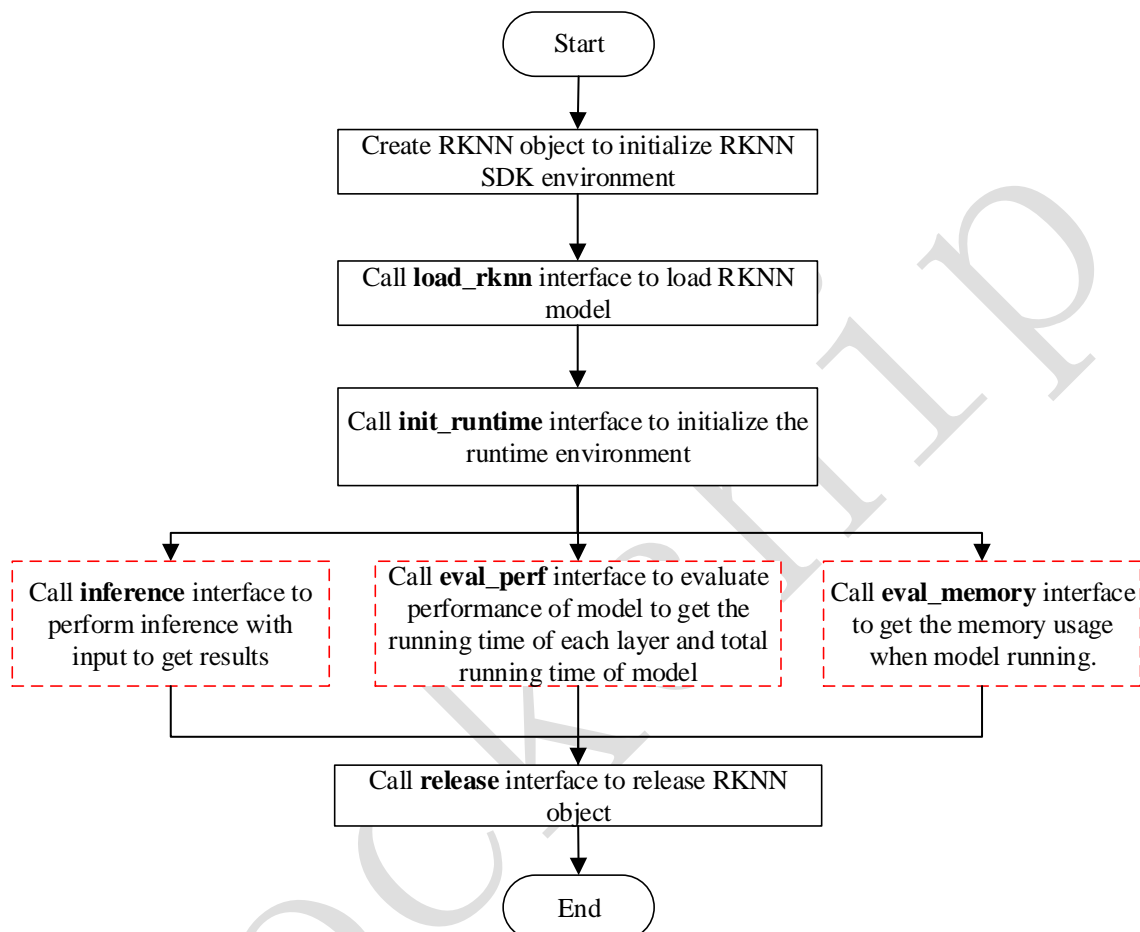


Figure 2 Usage flow of RKNN-Toolkit when running an RKNN model on PC

Note:

1. The above steps should be performed in order.
2. The order of model inference, performance evaluation and memory evaluation steps marked in red box is not fixed, it depends on the actual demand.
3. We can call eval_memory only when the target hardware platform is RK3399Pro, RK1808 or RK3399Pro Linux or TB-RK1808 AI Compute Stick.

3.2.2 Scenario 2: Inference on RK3399Pro (or RK1808 or TB-RK1808S0 AI Compute Stick) connected with PC

In this Scenario, PC is connected to the development board through USB interface, RKNN-Toolkit transfers the built or exported RKNN model to RK3399Pro (or RK1808 or TB-RK1808S0 AI Compute Stick) and performs the model inference to obtain result and performance information from RK3399Pro (or RK1808 or TB-RK1808S0 AI Compute Stick).

If the model is a non-RKNN model (Caffe, TensorFlow, TensorFlow Lite, ONNX, Darknet), the usage flow and precautions of RKNN-Toolkit are the same as the sub-scenario 1 of the scenario 1 (see [Section 3.2.1.1](#)).

If the model is an RKNN model (file suffix is “rknn”), the usage flow and precautions of RKNN-Toolkit are the same as the sub-scenario 2 of the scenario 1 (see [Section 3.2.1.2](#)).

In addition, in this scenario, we also need to complete the following two steps:

1. Make sure the USB OTG of development board is connected to PC, and call `list_devices` interface will show the device. More information about “`list_devices`” interface can see Section 3.5.13.

2. “`Target`” parameter and “`device_id`” parameter need to be specified when calling “`init_runtime`” interface to initialize the runtime environment, where “`target`” indicates the type of hardware, optional values are “`rk1808`” and “`rk3399pro`”. When multiple devices are connected to PC, “`device_id`” parameter needs to be specified. It is a string which can be obtained by calling “`list_devices`” interface, for example:

```
all device(s) with adb mode:
[]
all device(s) with ntb mode:
['TB-RK1808S0', '515e9b401c060c0b']
```

Runtime initialization code is as follows:

```
# RK3399Pro
ret = init_runtime(target='rk3399pro', device_id='VGEJY9PW7T')

.....

# RK1808
```

```
ret = init_runtime(target='rk1808', device_id='515e9b401c060c0b ')\n\n# TB-RK1808S0 AI Compute Stick\nret = init_runtime(target='rk1808', device_id=' TB-RK1808S0')
```

Note: Currently, RK1808, TB-RK1808S0 AI Compute Stick support ADB or NTB. When we use multiple devices on PC or RK3399Pro Linux Development Board, all devices should use same mode, both are ADB or both are NTB.

3.2.3 Scenario 3: Inference on RK3399Pro Linux development board

In this scenario, RKNN-Toolkit is installed in RK3399Pro Linux system directly. The built or imported RKNN model runs directly on RK3399Pro to obtain the actual inference results or performance information of the model.

For RK3399Pro Linux development board, the usage flow of RKNN-Toolkit depends on the type of model. If the model is a non-RKNN model, the usage flow is the same as that in the sub-scenario 1 of scenario 1(see [Section 3.2.1.1](#)), otherwise, please refer to the usage flow in the sub-scenario 2 of scenario1(see [Section 3.2.1.2](#)).

3.3 Hybrid Quantization

RKNN-Toolkit supports hybrid quantization from version 1.0.0.

Before version 1.0.0, the quantization feature can minimize model accuracy based on improved model performance. But for some models, the accuracy has dropped a bit. In order to allow users to better balance performance and accuracy, we add new feature hybrid quantization from version 1.0.0. Users can decide which layers to quantize or not to quantize. Users can also modify the quantization parameters according to their own experience.

Note:

1. The example directory provides a hybrid quantization example named `ssd_mobilenet_v2`, which can be referenced to this example for hybrid quantification practice.
2. Multiple inputs model can not do hybrid quantization currently.

3.3.1 Instructions of hybrid quantization

Currently, we have three kind of ways to use hybrid quantization:

1. Convert quantized layer to non-quantized layer. This way may improve accuracy, but performance will drop.
2. Convert non-quantized layer to quantized layer. This way may improve performance, but accuracy may drop.
3. Modify quantization parameters of pointed quantized layer. This way may improve accuracy or reduce accuracy, it has no effect on performance.

PS: Only one method can be used at a time.

3.3.2 Hybrid quantization profile

When using the hybrid quantization feature, the first step is to generate a hybrid quantization profile, which is briefly described in this section.

When we call the hybrid quantization interface `hybrid_quantization_step1`, a yaml configuration file of `{model_name}.quantization.cfg` is generated in the current directory. The configuration file format is as follows:

```
%YAML 1.2
---
# hybrid_quantization_action can be delete, add or modify, only one of
these can be set at a hybrid quantization
hybrid_quantization_action: delete
'@attach_concat_1/out0_0:out0':
  dtype: asymmetric_quantized
  method: layer
  max_value:
    - 10.568130493164062
  min_value:
    - -53.3099365234375
  zero_point:
    - 213
  scale:
    - 0.25050222873687744
  qtype: u8
```

```
.....
```

```
'@FeatureExtractor/MobilenetV2/Conv/Conv2D_230:bias':  
  dtype: None
```

First line is the version of yaml. Second line is separator. Third line is comment. Followed by the main content of the configuration file.

The first line of the body of the configuration file is the operation when using hybrid quantization. When using the hybrid quantization function, the user needs to indicate which way to use the hybrid quantization, that is, the three ways mentioned in the previous section. The corresponding actions are: "delete", "add", and "modify". The default value is "delete".

Next is a list of model layers, each layer is a dictionary. The key of each dictionary is composed of `@{layer_name}_{layer_id}:[weight/bias/out{port}]`, where `layer_name` is the name of this layer and `layer_id` is an identification of this layer. We usually quantize weight/bias/out when do quantization, and use multiple out0, out1, etc. for multiple outputs. The value of the dictionary is the quantization parameter. If the layer is not be quantized, there is only "dtype" item, and the value of "dtype" is None.

3.3.3 Usage flow of hybrid quantization

When using the hybrid quantization function, it can be done in four steps.

Step1, load the original model and generate a quantize configuration file, a model structure file and a model weight bias file. The specific interface call process is as follows:

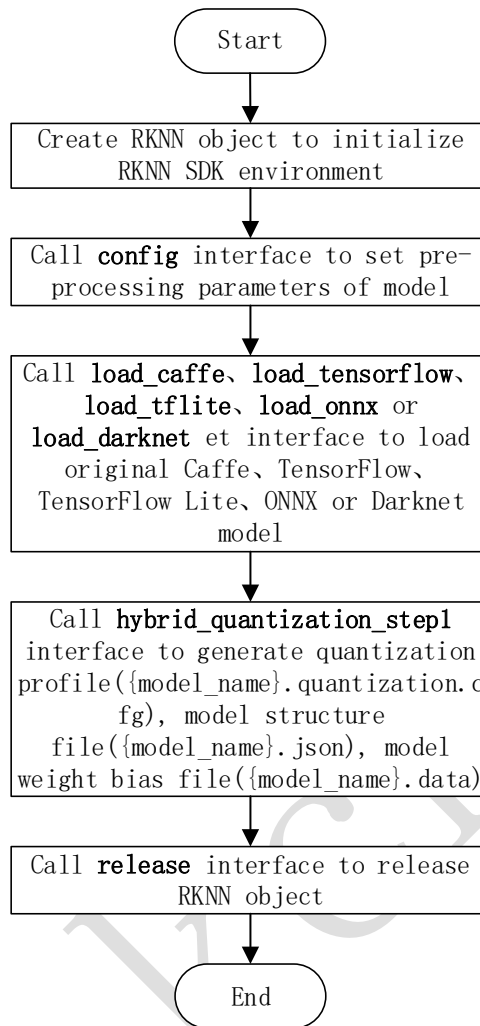


Figure 3 call process of hybrid quantization step 1

Step 2, Modify the quantization configuration file generated in the first step.

- If some quantization layer is changed to a non-quantization layer, find the layer that is not to be quantized, and delete the out item of its input node and the weight/bias item of this layer from the quantization configuration file.
- If some layers are changed from non-quantization to quantization, change the value of the `hybrid_quantization_action` item in the quantization configuration file to "add", then find the layer in the quantization configuration file and change its `dtype` from `None` to `asymmetric_quantized` or `dynamic_fixed_point`. Note: `dtype` needs to be consistent with other quantization layers
- If the quantization parameter is to be modified, the value of the `hybrid_quantization_action` item in the quantization configuration file is changed to "modify", and then the quantization parameter

of the specified layer can be directly modified.

Step 3, generate hybrid quantized RKNN model. The specific interface call flow is as follows:

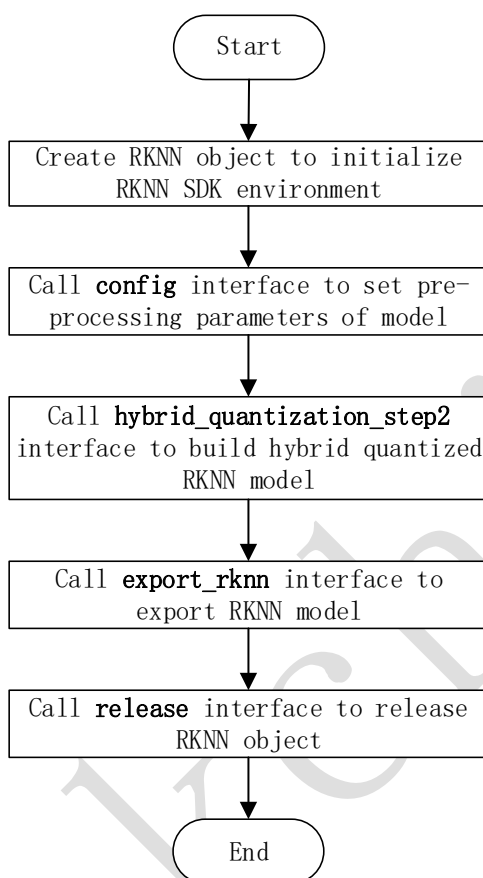


Figure 4 call process of hybrid quantization step 3

Step 4, use the RKNN model generated in the previous step to inference.

3.4 Model Segmentation

RKNN-Toolkit supports model segmentation from version 1.2.0. This feature is used in a scenario where multiple models run simultaneously. A single model can be divided into multiple segments to be executed on the NPU, thereby adjusting the execution time of multiple models occupying the NPU, avoiding that one model occupies too much execution time, while other model was not implemented in time.

The chance of each segment preempting the NPU is equal. After a segment execution is completed, it will take the initiative to give up the NPU, if the model has the next segment, it will be added to the end of the command queue again. At this time, if there are segments of other models waiting to be executed,

segmentation of other models will be performed in the order of the command queue. Note: The model that does not have model segmentation enabled is by default a segment.

The ordinary RKNN model can be divided into multiple segments by calling the `export_rknn_sync_model` interface. For the detailed usage of this interface, please refer to [section 3.7.13](#).

If you are in a single model running scenario, you need to turn it off, just do not use a segmentation RKNN model. Because turning on model segmentation reduces the efficiency of single model execution, however, the multi-model running scene does not reduce the efficiency of model execution. Therefore, it is only recommended to use this feature in scenarios where multiple models are running at the same time.

3.5 Example

The following is the sample code for loading TensorFlow Lite model (see the *example/mobilenet_v1* directory for details), if it is executed on PC, the RKNN model will run on the simulator.

```
import numpy as np
import cv2
from rknn.api import RKNN

def show_outputs(outputs):
    output = outputs[0][0]
    output_sorted = sorted(output, reverse=True)
    top5_str = 'mobilenet_v1\n-----TOP 5-----\n'
    for i in range(5):
        value = output_sorted[i]
        index = np.where(output == value)
        for j in range(len(index)):
            if (i + j) >= 5:
                break
            if value > 0:
                topi = '{}: {}'.format(index[j], value)
            else:
                topi = '-1: 0.0'
            top5_str += topi
    print(top5_str)

def show_perfs(perfs):
    perfs = 'perfs: {}'.format(outputs)
    print(perfs)

if __name__ == '__main__':
```

```
# Create RKNN object
rknn = RKNN()

# pre-process config
print('--> config model')
rknn.config(channel_mean_value='103.94 116.78 123.68 58.82',
reorder_channel='0 1 2')
print('done')

# Load tensorflow model
print('--> Loading model')
ret = rknn.load_tflite(model='./mobilenet_v1.tflite')
if ret != 0:
    print('Load mobilenet_v1 failed!')
    exit(ret)
print('done')

# Build model
print('--> Building model')
ret = rknn.build(do_quantization=True, dataset='./dataset.txt')
if ret != 0:
    print('Build mobilenet_v1 failed!')
    exit(ret)
print('done')

# Export rknn model
print('--> Export RKNN model')
ret = rknn.export_rknn('./mobilenet_v1.rknn')
if ret != 0:
    print('Export mobilenet_v1.rknn failed!')
    exit(ret)
print('done')

# Set inputs
img = cv2.imread('./dog_224x224.jpg')
img = cv2.cvtColor(img, cv2.COLOR_BGR2RGB)

# init runtime environment
print('--> Init runtime environment')
ret = rknn.init_runtime()
if ret != 0:
    print('Init runtime environment failed!')
    exit(ret)
print('done')

# Inference
print('--> Running model')
outputs = rknn.inference(inputs=[img])
show_outputs(outputs)
```



```

print('done')

# perf
print('--> Begin evaluate model performance')
perf_results = rknn.eval_perf(inputs=[img])
print('done')

rknn.release()

```

Where dataset.txt is a text file containing the path of the test image. For example, if we now have a picture of dog_224x224.jpg in the *example/mobilenet_v1* directory, then the corresponding content in dataset.txt is as follows:

```
dog_224x224.jpg
```

When performing model inference, the result of this demo is as follows:

```

-----TOP 5-----
[156]: 0.8837890625
[155]: 0.0677490234375
[188 205]: 0.00867462158203125
[188 205]: 0.00867462158203125
[263]: 0.0057525634765625

```

When evaluating model performance, the result of this demo is as follows (since it is executed on PC, the result is for reference only).

```

=====
                        Performance
=====
Layer ID   Name                                     Time(us)
0          tensor.transpose_3                  72
44          convolution.relu.pooling.layer2_2    363
59          convolution.relu.pooling.layer2_2    201
45          convolution.relu.pooling.layer2_2    185
60          convolution.relu.pooling.layer2_2    243
46          convolution.relu.pooling.layer2_2     98
61          convolution.relu.pooling.layer2_2    149
47          convolution.relu.pooling.layer2_2    152
62          convolution.relu.pooling.layer2_2    120
48          convolution.relu.pooling.layer2_2    116
63          convolution.relu.pooling.layer2_2    101
49          convolution.relu.pooling.layer2_2    185
64          convolution.relu.pooling.layer2_2    101
50          convolution.relu.pooling.layer2_2    111
65          convolution.relu.pooling.layer2_2    109

```

| | | |
|----------------------|-----------------------------------|-----|
| 51 | convolution.relu.pooling.layer2_2 | 213 |
| 66 | convolution.relu.pooling.layer2_2 | 109 |
| 52 | convolution.relu.pooling.layer2_2 | 213 |
| 67 | convolution.relu.pooling.layer2_2 | 109 |
| 53 | convolution.relu.pooling.layer2_2 | 213 |
| 68 | convolution.relu.pooling.layer2_2 | 109 |
| 54 | convolution.relu.pooling.layer2_2 | 213 |
| 69 | convolution.relu.pooling.layer2_2 | 109 |
| 55 | convolution.relu.pooling.layer2_2 | 213 |
| 70 | convolution.relu.pooling.layer2_2 | 109 |
| 56 | convolution.relu.pooling.layer2_2 | 174 |
| 71 | convolution.relu.pooling.layer2_2 | 219 |
| 57 | convolution.relu.pooling.layer2_2 | 353 |
| 58 | fullyconnected.relu.layer_3 | 110 |
| Total Time(us): 4772 | | |
| FPS(800MHz): 209.56 | | |
| ===== | | |

3.6 RKNN-Toolkit API description

3.6.1 RKNN object initialization and release

The initialization/release function group consists of API interfaces to initialize and release the RKNN object as needed. The **RKNN()** must be called before using all the API interfaces of RKNN-Toolkit, and call the **release()** method to release the object when task finished.

When we init RKNN object, we can set **verbose** and **verbose_file** parameters, used to show detailed log information of model loading, building and so on. The data type of verbose parameter is bool. If we set the value of this parameter to True, the RKNN Toolkit will show detailed log information on screen. The data type of verbose_file is string. If we set the value of this parameter to a file path, the detailed log information will be written to this file (**the verbose also need be set to True**).

The sample code is as follows:

```
# Show the detailed log information on screen, and saved to
# mobilenet_build.log
rknn = RKNN(verbose=True, verbose_file='./mobilenet_build.log')
# Only show the detailed log information on screen.
rknn = RKNN(verbose=True)
...
rknn.release()
```

3.6.2 Loading non-RKNN model

RKNN-Toolkit currently supports Caffe, TensorFlow, TensorFlow Lite, ONNX, Darknet five kinds of non-RKNN models. There are different calling interfaces when loading models, the loading interface of these five models is described in detail below.

3.6.2.1 Loading Caffe model

| | |
|-------------|--|
| API | load_caffe |
| Description | Load Caffe model |
| Parameter | model: The path of Caffe model structure file (suffixed with “.prototxt”). |
| | proto: Caffe model format (valid value is ‘caffe’ or ‘lstm_caffe’). We use ‘lstm_caffe’ when the model is RNN model. |
| | blobs: The path of Caffe model binary data file (suffixed with “.caffemodel”). |
| Return | 0: Import successfully |
| Value | -1: Import failed |

The sample code is as follows:

```
# Load the mobilenet_v2 Caffe model in the current path
ret = rknn.load_caffe(model='./mobilenet_v2.prototxt',
                      proto='caffe',
                      blobs='./mobilenet_v2.caffemodel')
```

3.6.2.2 Loading TensorFlow model

| | |
|-------------|--|
| API | load_tensorflow |
| Description | Load TensorFlow model |
| Parameter | tf_pb: The path of TensorFlow model file (suffixed with “.pb”). |
| | inputs: The input node of model, input with multiple nodes is supported now. All the input node string are placed in a list. |

| | |
|--------|--|
| | input_size_list: The size and number of channels of the image corresponding to the input node. As in the example of mobilenet_v1 model, the input_size_list parameter should be set to [224,224,3]. |
| | outputs: The output node of model, output with multiple nodes is supported now. All the output nodes are placed in a list. |
| | predef_file: In order to support some controlling logic, a predefined file in npz format needs to be provided. This predefined file can be generated by the following function call: np.savez('prd.npz', [placeholder name]=prd_value). If there are / in placeholder name, use # to replace. |
| | mean_values: The mean values of the input. This parameter needs to be set only if the imported model is a quantized model, and three channels of input of model have the same mean value. |
| | std_values: The scale value of the input. This parameter needs to be set only if the imported model is a quantized model. |
| Return | 0: Import successfully |
| value | -1: Import failed |

The sample code is as follows:

```
# Load ssd_mobilenet_v1_coco_2017_11_17 TF model in the current path
ret = rknn.load_tensorflow(
    tf_pb='./ssd_mobilenet_v1_coco_2017_11_17.pb',
    inputs=['FeatureExtractor/MobilenetV1/MobilenetV1/Conv2d_0
           /BatchNorm/batchnorm/mul_1'],
    outputs=['concat', 'concat_1'],
    input_size_list=[[300, 300, 3]])
```

3.6.2.3 Loading TensorFlow Lite model

| | |
|-------------|----------------------------|
| API | load_tflite |
| Description | Load TensorFlow Lite model |

| | |
|-----------|--|
| Parameter | model: The path of TensorFlow Lite model file (suffixed with “.tflite”). |
| Return | 0: Import successfully |
| Value | -1: Import failed |

The sample code is as follows:

```
# Load the mobilenet_v1 TF-Lite model in the current path
ret = rknn.load_tflite(model = './mobilenet_v1.tflite')
```

3.6.2.4 Loading ONNX model

| | |
|-------------|---|
| API | load_onnx |
| Description | Load ONNX model |
| Parameter | model: The path of ONNX model file (suffixed with “.onnx”). |
| Return | 0: Import successfully |
| Value | -1: Import failed |

The sample code is as follows:

```
# Load the arcface onnx model in the current path
ret = rknn.load_onnx(model = './arcface.onnx')
```

3.6.2.5 Loading Darknet model

| | |
|-------------|---|
| API | load_darknet |
| Description | Load Darknet model |
| Parameter | model: The path of Darknet model structure file (suffixed with “.cfg”). |
| | weight: The path of weight file (suffixed with “.weight”). |
| Return | 0: Import successfully |
| Value | -1: Import failed |

The sample code is as follows:

```
# Load the yolov3-tiny darknet model in the current path
ret = rknn.load_darknet(model = './yolov3-tiny.cfg',
                        weight= './yolov3.weights')
```

3.6.3 RKNN model configuration

Before the RKNN model is built, the model needs to be configured first through the **config** interface.

| API | config |
|-------------|---|
| Description | Set model parameters |
| Parameter | <p>batch_size: The size of each batch of data sets. The default value is 100.</p> <p>channel_mean_value: It is a list contains four value (M0, M1, M2, S0), where the first three value are all mean parameters, the latter value is a scale parameter. If the input data is three-channel data with (Cin0, Cin1, Cin2), after preprocessing, the shape of output data is (Cout0, Count1, Count2), calculated as follows:</p> <div style="background-color: #f0f0f0; padding: 10px; margin: 10px 0;"> $\begin{aligned} \text{Cout0} &= (\text{Cin0} - \text{M0})/\text{S0} \\ \text{Cout1} &= (\text{Cin1} - \text{M1})/\text{S0} \\ \text{Cout2} &= (\text{Cin2} - \text{M2})/\text{S0} \end{aligned}$ </div> <p>Note: for three-channel input only, other channel formats can be ignored.</p> <p>For example, if input data needs to be normalized to [-1,1], this parameter should be set to (128 128 128 128). If input data needs to be normalized to [-1,1], this parameter should be set to (0 0 0 255). If there are multiple inputs, the corresponding parameters for each input is split with '#', such as '128 128 128 128#128 128 128 128'.</p> <p>epochs: The number of times the same batch of data sets are processed during inference or performance evaluation. The default value is 1.</p> <p>reorder_channel: A permutation of the dimensions of input image (for three-channel input only, other channel formats can be ignored). The new tensor dimension i will correspond to the original input dimension reorder_channel[i]. For example, if the original image is RGB format, '2 1 0' indicates that it will be converted to BGR.</p> <p>If there are multiple inputs, the corresponding parameters for each input is split with '#',</p> |

| | |
|--------------|--|
| | such as '0 1 2#0 1 2'. |
| | Note: each value of reorder_channel must not be set to the same value. |
| | need_horizontal_merge: Indicates Whether to merge Horizontal, the default value is False. If the model is inception v1/v3/v4, it is recommended to enable this option. |
| | quantized_dtype: Quantization type, the quantization types currently supported are asymmetric_quantized-u8,dynamic_fixed_point-8,dynamic_fixed_point-16. The default value is asymmetric_quantized-u8. |
| Return Value | None |

The sample code is as follows:

```
# model config
rknn.config(channel_mean_value='103.94 116.78 123.68 58.82',
            reorder_channel='0 1 2',
            need_horizontal_merge=True)
```

3.6.4 Building RKNN model

| | |
|-------------|--|
| API | build |
| Description | Build corresponding RKNN model according to imported model (Caffe, TensorFlow, TensorFlow Lite, etc.). |
| Parameter | <p>do_quantization: Whether to quantize the model, optional values are True and False.</p> <p>dataset: A input data set for rectifying quantization parameters. Currently supports text file format, the user can place the path of picture(jpg or png) or npy file which is used for rectification. A file path for each line. Such as:</p> <pre>a.jpg b.jpg or a.npy</pre> |

| | |
|--|--|
| | <p><code>b.npy</code></p> <p>If there are multiple inputs, the corresponding files are divided by space. Such as:</p> <p><code>a.jpg a2.jpg</code></p> <p><code>b.jpg b2.jpg</code></p> <p>or</p> <p><code>a.npy a2.npy</code></p> <p><code>b.npy b2.npy</code></p> |
| | <p><code>pre_compile</code>: If this option is set to True, it may reduce the size of the model file, increase the speed of the first startup of the model on the device. However, if this option is enabled, the built model can be only run on the hardware platform, and the inference or performance evaluation cannot be performed on simulator. If the hardware is updated, the corresponding model need to be rebuilt.</p> <p>Note:</p> <ol style="list-style-type: none"> 1. we can not use pre compile on RK3399Pro Linux development board or Windows PC or Mac OS X PC. 2. Pre-compiled model generated by RKNN-Toolkit-v1.0.0 or later can not run on device installed old driver (NPU driver version < 0.9.6), and pre-compiled model generated by old RKNN-Toolkit (version < 1.0.0) can not run on device installed new NPU driver (NPU drvier version >= 0.9.6). We can call <code>get_sdk_version</code> interface to fetch driver version. 3. If there are multiple inputs, this option needs to be set to False. |
| | <p><code>rknn_batch_size</code>: batch size of input, default is 1. If greater than 1, NPU can inference multiple frames of input image or input data in one inference. For example, original input of MobileNet is [1, 224, 224, 3], output shape is [1, 1001]. When <code>rknn_batch_size</code> is set to 4, the input shape of MobileNet becomes [4, 224, 224, 3], output shape becomes [4, 1001].</p> |

| | |
|--------|--|
| | <p>Note:</p> <ol style="list-style-type: none"> 1. The adjustment of <code>rknn_batch_size</code> does not improve the performance of the general model on the NPU, but it will significantly increase memory consumption and increase the delay of single frame. 2. The adjustment of <code>rknn_batch_size</code> can reduce the consumption of the ultra-small model on the CPU and improve the average frame rate of the ultra-small model. (Applicable to the model is too small, CPU overhead is greater than the NPU overhead) 3. The value of <code>rknn_batch_size</code> is recommended to be less than 32, to avoid the memory usage is too large and the reasoning fails. 4. After the <code>rknn_batch_size</code> is modified, the shape of input and output will be modified. So the inputs of inference should be set to correct size. We also need to process the returned outputs on post processing. |
| Return | 0: Build successfully |
| value | -1: Build failed |

The sample code is as follows:

```
# Build and quantize RKNN model
ret = rknn.build(do_quantization=True, dataset='./dataset.txt')
```

3.6.5 Export RKNN model

In order to make the RKNN model reusable, an interface to produce a persistent model is provided. After building RKNN model, `export_rknn()` is used to save an RKNN model to a file. If you have an RKNN model now, it is not necessary to call `export_rknn()` interface again.

| | |
|-------------|--|
| API | <code>export_rknn</code> |
| Description | Save RKNN model in the specified file (suffixed with ".rknn"). |

| | |
|-----------|---|
| Parameter | export_path: The path of generated RKNN model file. |
| Return | 0: Export successfully |
| Value | -1: Export failed |

The sample code is as follows:

```
# save the built RKNN model as a mobilenet_v1.rknn file in the current
# path
ret = rknn.export_rknn(export_path = './mobilenet_v1.rknn')
```

3.6.6 Loading RKNN model

| | |
|-------------|------------------------------------|
| API | load_rknn |
| Description | Load RKNN model |
| Parameter | path: The path of RKNN model file. |
| Return | 0: Load successfully |
| Value | -1: Load failed |

The sample code is as follows:

```
# Load the mobilenet_v1 RKNN model in the current path
ret = rknn.load_rknn(path='./mobilenet_v1.rknn')
```

3.6.7 Initialize the runtime environment

Before inference or performance evaluation, the runtime environment must be initialized. This interface determines which type of runtime hardware is specified to run model.

| | |
|-------------|---|
| API | init_runtime |
| Description | Initialize the runtime environment. Set the device information (hardware platform, device ID). Determine whether to enable debug mode to obtain more detailed performance information for performance evaluation. |
| Parameter | target: Target hardware platform, now supports "rk3399pro", "rk1808". The default value |

| | |
|--------|---|
| | <p>is “None”, which indicates model runs on default hardware platform and system. Specifically, if RKNN-Toolkit is used in PC, the default device is simulator, and if RKNN-Toolkit is used in RK3399Pro Linux development board, the default device is RK3399Pro. The “rk1808” includes TB-RK1808 AI Compute Stick.</p> |
| | <p>device_id: Device identity number, if multiple devices are connected to PC, this parameter needs to be specified which can be obtained by calling “<i>list_devices</i>” interface. The default value is “None”.</p> <p>Note: Mac OS X platform does not support multiple devices.</p> |
| | <p>perf_debug: Debug mode option for performance evaluation. In debug mode, the running time of each layer can be obtained, otherwise, only the total running time of model can be given. The default value is False.</p> |
| | <p>eval_mem: Whether enter memory evaluation mode. If set True, we can call eval_memory interface later to fetch memory usage of model running. The default value is False.</p> |
| | <p>async_mode: Whether to use asynchronous mode. When calling the inference interface, it involves setting the input picture, model running, and fetching the inference result. If the asynchronous mode is enabled, setting the input of the current frame will be performed simultaneously with the inference of the previous frame, so in addition to the first frame, each subsequent frame can hide the setting input time, thereby improving performance. In asynchronous mode, the inference result returned each time is the previous frame. The default value for this parameter is False.</p> |
| Return | 0: Initialize the runtime environment successfully |
| Value | -1: Initialize the runtime environment failed |

The sample code is as follows:

```
# Initialize the runtime environment
ret = rknn.init_runtime(target='rk1808', device_id='012345789AB')
if ret != 0:
    print('Init runtime environment failed')
    exit(ret)
```

3.6.8 Inference with RKNN model

This interface kicks off the RKNN model inference and get the result of inference.

| API | inference |
|-------------|---|
| Description | <p>Use the model to perform inference with specified input and get the inference result.</p> <p>Detailed scenarios are as follows:</p> <ol style="list-style-type: none">1. If RKNN-Toolkit is running on PC and the target is set to " rk3399pro " or " rk1808 " when initializing the runtime environment, the inference of model is performed on the specified hardware platform. The "rk1808" includes TB-RK1808 AI Compute Stick.2. If RKNN-Toolkit is running on PC and the target is not set when initializing the runtime environment, the inference of model is performed on the simulator.3. If RKNN-Toolkit is running on RK3399Pro Linux development board, the inference of model is performed on the actual hardware. |
| Parameter | inputs: Inputs to be inferred, such as images processed by cv2. The object type is ndarray list. |
| | data_type: The numerical type of input data. Optional values are 'float32', 'float16', 'int8', 'uint8', 'int16'. The default value is 'uint8'. |
| | data_format: The shape format of input data. Optional values are "nchw", "nhwc". The default value is 'nhwc'. |
| | outputs: The object to store final output data, the object type is ndarray list. The shape and dtype of outputs are consistent with the return value of this interface. The default value is None, which indicates the dtype of return value is float32. |
| | inputs_pass_through: Pass the input transparently to the NPU driver. In non-transparent mode, the tool will reduce the mean, divide the variance, etc. before the input is passed to the NPU driver; in transparent mode, these operations will not be performed. The value of |

| | |
|--------|---|
| | <p>this parameter is an array. For example, to pass input0 and not input1, the value of this parameter is [1, 0]. At present, we only support single input, so the value [0] means that it is not transparent, and the value of [1] means that it is transparent. The default value is None, which means that all input is not transparent.</p> |
| Return | <p>results: The result of inference, the object type is ndarray list.</p> |
| Value | <p>Note: Versions prior to 1.0.0 will convert output shape from "NHWC" to "NCHW". Starting from version 1.1.0, the shape of the output will be consistent with the original model, and no longer convert from "NHWC" to "NCHW". Please pay attention to the location of the channel when performing post processing.</p> |

The sample code is as follows:

For classification model, such as mobilenet_v1, the code is as follows (refer to *example/mobilenet_v1* for the complete code):

```
# Perform inference for a picture with a model and get a top-5 result
.....
outputs = rknn.inference(inputs=[img])
show_outputs(outputs)
.....
```

The result of top-5 is as follows:

```
-----TOP 5-----
[156]: 0.8837890625
[155]: 0.0677490234375
[188 205]: 0.00867462158203125
[188 205]: 0.00867462158203125
[263]: 0.0057525634765625
```

For object detection model, such as mobilenet-ssd, the code is as follows (refer to *example/mobilenet-ssd* for the complete code):

```
# Perform inference for a picture with a model and get the result of object
# detection
.....
outputs = rknn.inference(inputs=[image])
```

.....

After the inference result is post-processed, the final output is shown in the following picture (the color of the object border is randomly generated, so the border color obtained will be different each time):

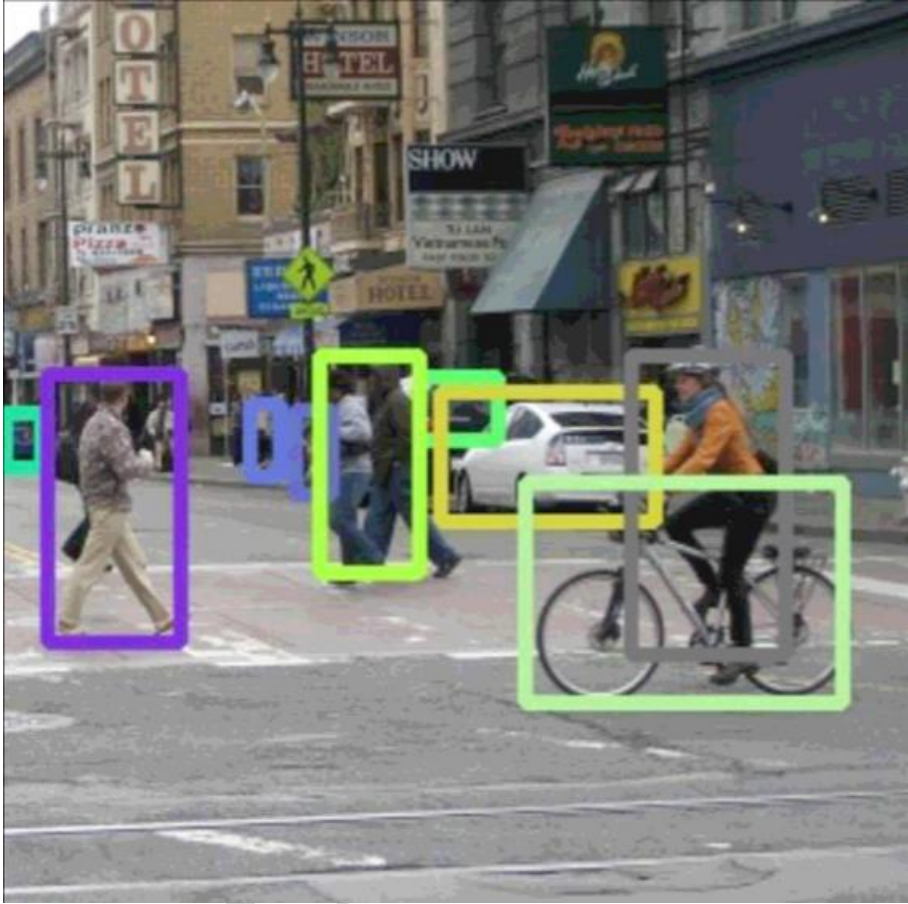


Figure 3 mobilenet-ssd inference result

3.6.9 Evaluate model performance

| | |
|-------------|---|
| API | eval_perf |
| Description | <p>Evaluate model performance.</p> <p>Detailed scenarios are as follows:</p> <ol style="list-style-type: none">1. If running on PC and not setting the target when initializing the runtime environment, the performance information is obtained from simulator, which contains the running time of each layer and the total running time of model.2. If running on RK3399Pro or RK1808 or TB-RK1808 AI Compute Stick which connected to |

| | |
|--------------|--|
| | <p>PC and setting perf_debug to False when initializing runtime environment, the performance information is obtained from RK3399Pro or RK1808, which only contains the total running time of model. And if the perf_debug is set to True, the running time of each layer will also be captured in detail.</p> <p>3. If running on RK3399Pro Linux development board and setting perf_debug to False when initializing runtime environment, the performance information is obtained from RK3399Pro, which only contains the total running time of model. And if the perf_debug is set to True, the running time of each layer will also be captured in detail.</p> |
| Parameter | <p>inputs: Input data, such as images processed by cv2. The object type is ndarray list.</p> <p>data_type: The numerical type of input data. Optional values are 'float32', 'float16', 'int8', 'uint8', 'int16'. The default value is 'uint8'.</p> <p>data_format: The shape format of input data. Optional values are "nchw", "nhwc". The default value is 'nhwc'.</p> <p>is_print: Whether to print performance evaluation results in the canonical format. The default value is True.</p> |
| Return Value | <p>perf_result: Performance information. The object type is dictionary.</p> <p>If running on device (RK3399Pro or RK1808) and set perf_debug to False when initializing the runtime environment, the dictionary gives only one field 'total_time', example is as follows:</p> <pre>{ 'total_time': 1000 }</pre> <p>In other scenarios, the obtained dictionary has one more field called 'layers' which is also a dictionary type. The 'layers' takes the ID of each layer as the key, and its value is one dictionary which contains 'name' (name of layer), 'operation' (operator, which is only available when running on the hardware platform), 'time'(time-consuming of this layer). Example is as follows:</p> <pre>{</pre> |

| | |
|--|--|
| | <pre> 'total_time', 4568, 'layers', { '0': { 'name': 'convolution.relu.pooling.layer2_2', 'operation': 'CONVOLUTION', 'time', 362 } '1': { 'name': 'convolution.relu.pooling.layer2_2', 'operation': 'CONVOLUTION', 'time', 158 } } } </pre> |
|--|--|

The sample code is as follows:

```

# Evaluate model performance
.....
rknn.eval_perf(inputs=[image], is_print=True)
.....

```

For mobilenet-ssd in example directory, the performance evaluation results are printed as follows(The following is the result obtained on the PC simulator. The details obtained when connecting the hardware device are slightly different from the result.):

| Performance | | |
|-------------|-----------------------------------|----------|
| Layer ID | Name | Time(us) |
| 0 | tensor.transpose_3 | 125 |
| 71 | convolution.relu.pooling.layer2_3 | 325 |
| 105 | convolution.relu.pooling.layer2_2 | 331 |
| 72 | convolution.relu.pooling.layer2_2 | 437 |
| 106 | convolution.relu.pooling.layer2_2 | 436 |
| 73 | convolution.relu.pooling.layer2_2 | 223 |
| 107 | convolution.relu.pooling.layer2_2 | 374 |
| 74 | convolution.relu.pooling.layer2_2 | 327 |
| 108 | convolution.relu.pooling.layer2_3 | 533 |
| 75 | convolution.relu.pooling.layer2_2 | 201 |
| 109 | convolution.relu.pooling.layer2_2 | 250 |
| 76 | convolution.relu.pooling.layer2_2 | 320 |
| 110 | convolution.relu.pooling.layer2_2 | 250 |
| 77 | convolution.relu.pooling.layer2_2 | 165 |
| 111 | convolution.relu.pooling.layer2_2 | 257 |
| 78 | convolution.relu.pooling.layer2_2 | 319 |

| | | |
|-----------------------|-----------------------------------|-----|
| 112 | convolution.relu.pooling.layer2_2 | 257 |
| 79 | convolution.relu.pooling.layer2_2 | 319 |
| 113 | convolution.relu.pooling.layer2_2 | 257 |
| 80 | convolution.relu.pooling.layer2_2 | 319 |
| 114 | convolution.relu.pooling.layer2_2 | 257 |
| 81 | convolution.relu.pooling.layer2_2 | 319 |
| 115 | convolution.relu.pooling.layer2_2 | 257 |
| 82 | convolution.relu.pooling.layer2_2 | 319 |
| 83 | convolution.relu.pooling.layer2_2 | 181 |
| 27 | tensor.transpose_3 | 48 |
| 84 | convolution.relu.pooling.layer2_2 | 45 |
| 28 | tensor.transpose_3 | 6 |
| 116 | convolution.relu.pooling.layer2_3 | 297 |
| 85 | convolution.relu.pooling.layer2_2 | 233 |
| 117 | convolution.relu.pooling.layer2_2 | 311 |
| 86 | convolution.relu.pooling.layer2_2 | 479 |
| 87 | convolution.relu.pooling.layer2_2 | 249 |
| 35 | tensor.transpose_3 | 29 |
| 88 | convolution.relu.pooling.layer2_2 | 30 |
| 36 | tensor.transpose_3 | 5 |
| 89 | convolution.relu.pooling.layer2_2 | 125 |
| 90 | convolution.relu.pooling.layer2_3 | 588 |
| 91 | convolution.relu.pooling.layer2_2 | 96 |
| 41 | tensor.transpose_3 | 10 |
| 92 | convolution.relu.pooling.layer2_2 | 11 |
| 42 | tensor.transpose_3 | 5 |
| 93 | convolution.relu.pooling.layer2_2 | 31 |
| 94 | convolution.relu.pooling.layer2_3 | 154 |
| 95 | convolution.relu.pooling.layer2_2 | 50 |
| 47 | tensor.transpose_3 | 6 |
| 96 | convD_2 | 6 |
| 48 | tensor.transpose_3 | 4 |
| 97 | convolution.relu.pooling.layer2_2 | 17 |
| 98 | convolution.relu.pooling.layer2_3 | 153 |
| 99 | convolution.relu.pooling.layer2_2 | 49 |
| 53 | tensor.transpose_3 | 5 |
| 100 | convolution.relu.pooling.layer2_2 | 6 |
| 54 | tensor.transpose_3 | 4 |
| 101 | convolution.relu.pooling.layer2_2 | 10 |
| 102 | convolution.relu.pooling.layer2_2 | 21 |
| 103 | fullyconnected.relu.layer_3 | 13 |
| 104 | fullyconnected.relu.layer_3 | 8 |
| Total Time(us): 10462 | | |
| FPS(800MHz): 95.58 | | |
| ===== | | |

3.6.10 Evaluating memory usage

| | |
|--------------|--|
| API | eval_memory |
| Description | <p>Fetch memory usage when model is running on hardware platform.</p> <p>Model must run on RK3399Pro, RK1808, TB-RK1808 AI Compute Stick or RK3399Pro Linux.</p> <p>Note: When we use this API, the driver version must on 0.9.4 or later. We can get driver version via <code>get_sdk_version</code> interface.</p> |
| Parameter | <p><code>is_print</code>: Whether to print performance evaluation results in the canonical format. The default value is True.</p> |
| Return Value | <p><code>memory_detail</code>: Detail information of memory usage. Data format is dictionary.</p> <p>Data shows as below:</p> <pre>{ 'system_memory', { 'maximum_allocation': 128000000, 'total_allocation': 152000000 }, 'npu_memory', { 'maximum_allocation': 30000000, 'total_allocation': 40000000 }, 'total_memory', { 'maximum_allocation': 158000000, 'total_allocation': 192000000 } }</pre> <ul style="list-style-type: none">● The 'system_memory' means memory usage of system.● The 'npu_memory' means memory usage inside the NPU.● The 'total_memory' means the sum of system and npu's memory usage.● The 'maximum_allocation' filed means the maximum memory usage(unit: Byte) from start the model to dump the information. It is the peak memory usage.● The 'total_allocation' means the accumulation memory usage(unit: Byte) of allocate memory from start the model to dump the information. |

The sample code is as follows:



```
# eval memory usage
.....
memory_detail = rknn.eval_memory()
.....
```

For mobilenet_v1 in example directory, the memory usage when model running on RK1808 is printed as follows:

```
=====
                        Memory Profile Info Dump
=====
System memory:
    maximum allocation : 41.53 MiB
    total allocation   : 43.86 MiB
NPU memory:
    maximum allocation : 34.53 MiB
    total allocation   : 34.54 MiB

Total memory:
    maximum allocation : 76.06 MiB
    total allocation   : 78.40 MiB

INFO: When evaluating memory usage, we need consider
the size of model, current model size is: 4.10 MiB
=====
```

3.6.11 Get SDK version

| | |
|--------------|---|
| API | get_sdk_version |
| Description | Get API version and driver version of referenced SDK. Note: Before we use this interface, we must load model and initialize runtime first. And this API can only used on RK3399Pro、RK1808 or TB-RK1808 AI Compute Stick. |
| Parameter | None |
| Return Value | sdk_version: API and driver version. Data type is string. |

The sample code is as follows:

```
# Get SDK version
.....
```

```
sdk_version = rknn.get_sdk_version()
.....
```

The SDK version looks like below:

```
=====
RKNN VERSION:
  API: 0.9.9 (2bf05e1 build: 2019-08-14 14:42:10)
  DRV: 0.9.9 (8509ec7 build: 2019-08-05 10:54:34)
=====
```

3.6.12 Hybrid Quantization

3.6.12.1 hybrid_quantization_step1

When using the hybrid quantization function, the main interface called in the first phase is `hybrid_quantization_step1`, which is used to generate the model structure file (`{model_name}.json`), the weight file (`{model_name}.data`), and the quantization configuration file (`{model_name}.quantization.Cfg`). Interface details are as follows:

| API | hybrid_quantization_step1 |
|-------------|---|
| Description | Corresponding model structure files, weight files, and quantization profiles are generated according to the loaded original model. |
| Parameter | <p>dataset: A input data set for rectifying quantization parameters. Currently supports text file format, the user can place the path of picture(jpg or png) or npy file which is used for rectification. A file path for each line. Such as:</p> <pre>a.jpg b.jpg or a.npy b.npy</pre> |

| | |
|--------|-------------|
| Return | 0: success |
| Value | -1: failure |

The sample code is as follows:

```
# Call hybrid_quantization_step1 to generate quantization config
.....
ret = rknn.hybrid_quantization_step1(dataset='./dataset.txt')
.....
```

3.6.12.2 hybrid_quantization_step2

When using the hybrid quantization function, the primary interface for generating a hybrid quantized RKNN model phase call is hybrid_quantization_step2. The interface details are as follows:

| | |
|-------------|--|
| API | hybrid_quantization_step2 |
| Description | The model structure file, the weight file, the quantization profile, and the correction data set are received as inputs, and the hybrid quantized RKNN model is generated. |
| Parameter | <p>model_input: The model structure file generated in the first step, which is shaped like "{model_name}.json". The data type is a string. Required parameter.</p> <p>data_input: The model weight file generated in the first step, which is shaped like "{model_name}.data". The data type is a string. Required parameter.</p> <p>model_quantization_cfg: The modified model quantization profile, which is shaped like "{model_name}.quantization.cfg". The data type is a string. Required parameter.</p> <p>dataset: A input data set for rectifying quantization parameters. Currently supports text file format, the user can place the path of picture(jpg or png) or npy file which is used for rectification. A file path for each line. Such as:</p> <pre>a.jpg b.jpg or a.npy</pre> |

| | |
|--------|-------------|
| | b.npy |
| Return | 0: success |
| Value | -1: failure |

The sample code is as follows:

```
# Call hybrid_quantization_step2 to generate hybrid quantized RKNN model
.....
ret = rknn.hybrid_quantization_step2(
    model_input='./ssd_mobilenet_v2.json',
    data_input='./ssd_mobilenet_v2.data',
    model_quantization_cfg='./ssd_mobilenet_v2.quantization.cfg',
    dataset='./dataset.txt')
.....
```

3.6.13 Export a segmentation model

The function of this interface is to convert the ordinary RKNN model into a segment model, and the position of the segment is specified by the user.

| | |
|-------------|---|
| API | export_rknn_sync_model |
| Description | Insert a sync layer after the user-specified layer to segment the model and export the segmented model. |
| Parameter | <p>input_model: the model which need segment. Data type is string, required.</p> <p>sync_uids: uids of the layer which need insert sync layer. RKNN-Toolkit will insert a sync layer.</p> <p>Note:</p> <ol style="list-style-type: none"> 1. Uid can be obtained through the eval_perf interface, and perf_debug should be set to True when call init_runtime interface. When we want to obtain uids, we need connect a RK3399Pro or RK1808 or TB-RK1808 AI Compute Stick, we can also obtain uids on RK3399Pro Linux develop board. 2. The value of sync_uids cannot be filled in at will. It must be obtained by eval_perf interface, Otherwise unpredictable consequences may occur. |

| | |
|--------|---------------|
| | output_model: |
| Return | 0: success |
| Value | -1: failure |

The sample code is as follows:

```
from rknn.api import RKNN

if __name__ == '__main__':
    rknn = RKNN()
    ret = rknn.export_rknn_sync_model(
        input_model='./ssd_inception_v2.rknn',
        sync_uids=[206, 186, 152, 101, 96, 67, 18, 17],
        output_model='./ssd_inception_v2_sync.rknn')
    if ret != 0:
        print('export sync model failed.')
        exit(ret)
    rknn.release()
```

3.6.14 List Devices

| | |
|-------------|--|
| API | list_devices |
| Description | List connected RK3399PRO/RK1808/TB-RK1808S0 AI Compute Stick。 |
| Parameter | None |
| Return | Return adb_devices list and ntb_devices list. If there are no devices connected to PC, it will |
| Value | return two empty list. For example, there are two TB-RK1808 AI Compute Sticks connected to PC, it's return looks like below: adb_devices = [] ntb_devices = ['TB-RK1808S0', '515e9b401c060c0b'] |

The sample code is as follows:

```
from rknn.api import RKNN
```

```

if __name__ == '__main__':
    rknn = RKNN()
    rknn.list_devices()
    rknn.release()

```

The devices list looks like below:

```

*****
all device(s) with adb mode:
['515e9b401c060c0b', 'XGOR2N4EZR']
*****

```

3.6.15 Register Custom OP

| | |
|--------------|---|
| API | register_op |
| Description | Register custom op. |
| Parameter | op_path: rknnop file path of custom op build output |
| Return Value | Void |

The sample code is as follows. Note that this interface need be called before model converted. Please refer to the "Rockchip_Developer_Guide_RKNN_Toolkit_Custom_OP_CN" document for the use and development of custom operators.

```

rknn.register_op('./resize_area/ResizeArea.rknnop')

rknn.load_tensorflow(...)

```