

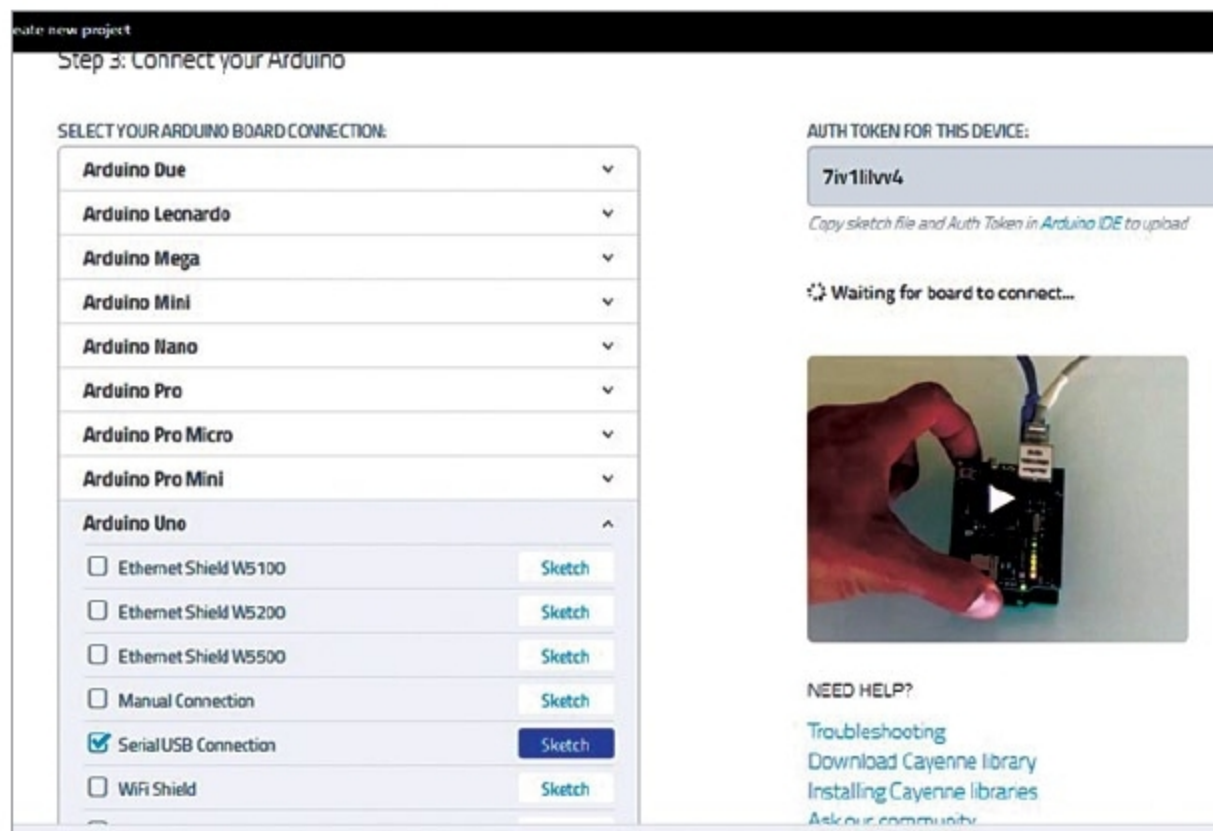


Fig. 4: Selection of board

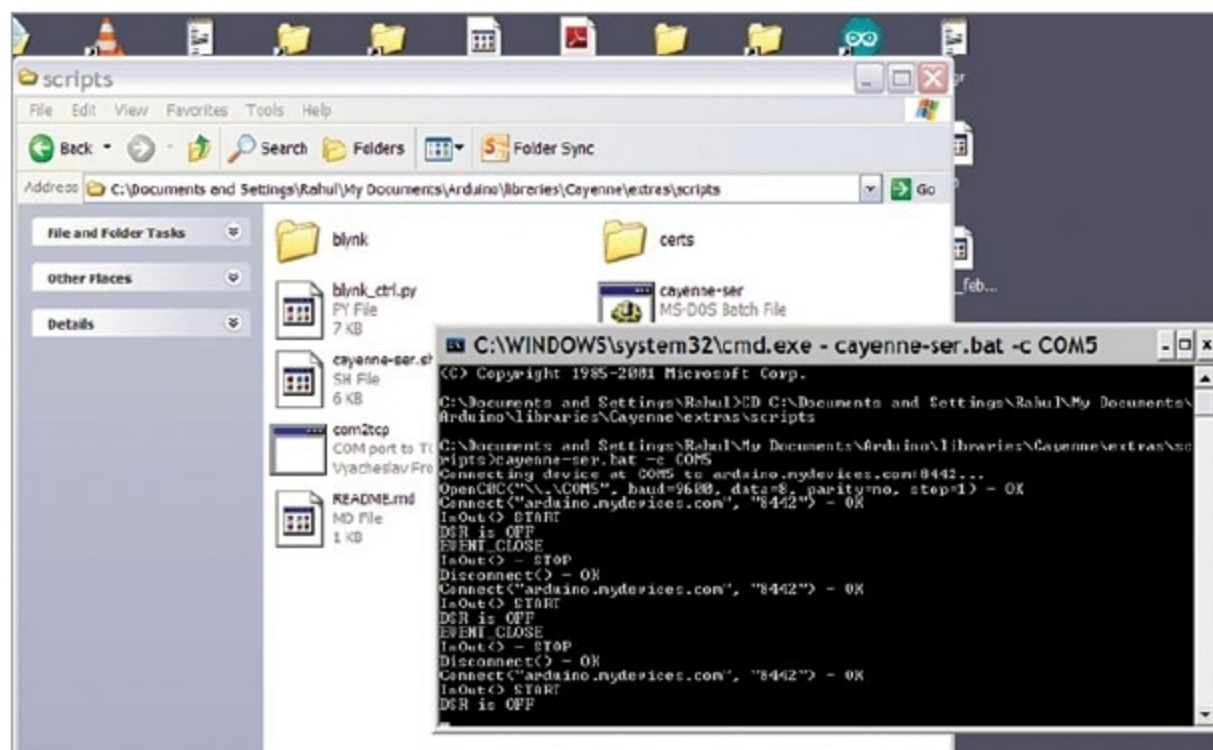


Fig. 5: Batch file in terminal

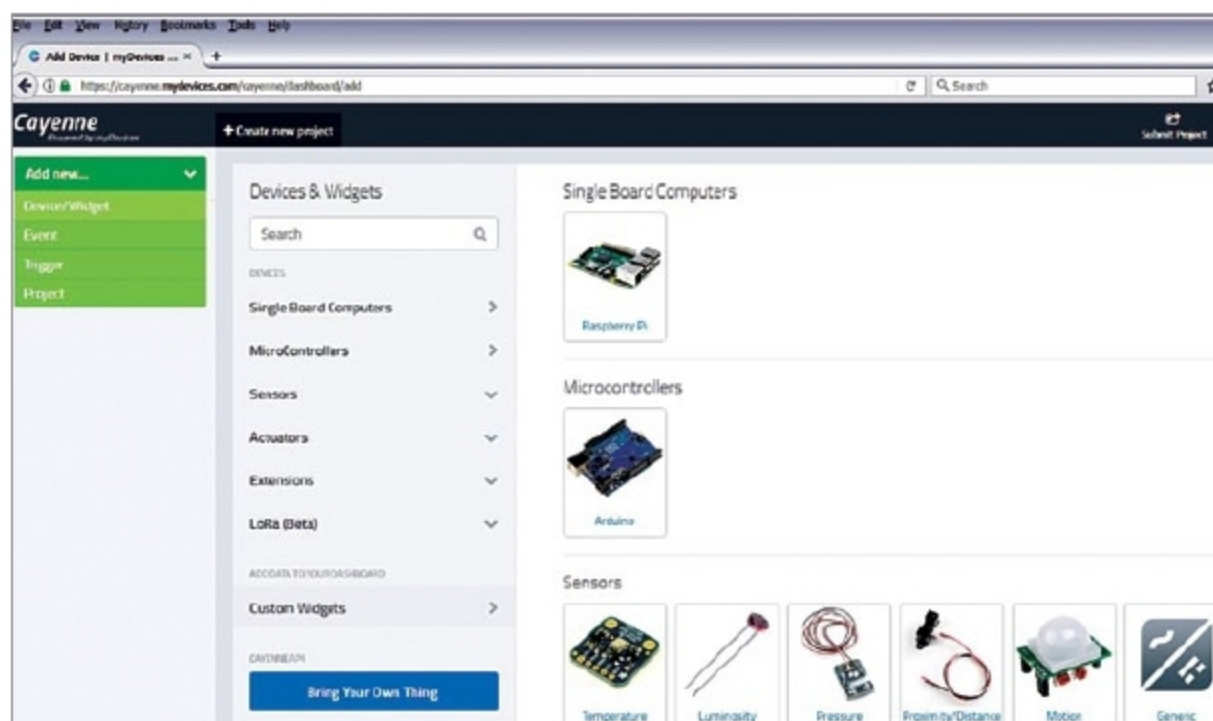


Fig. 6: Selection of widget

same folder using `cd` command. After accessing Scripts folder, run the following script in command prompt:

```
cayenne-ser.bat -c COM5
```

Here, COM5 is the communication port of the PC where Arduino board is connected. Fig. 5 shows navigation of Scripts folder and the script with command prompt in the terminal.

This script is also available in Scripts folder—you can find the address using the address bar. Type the above script (for Windows PC) and hit Enter. In a few seconds, the board will connect to Cayenne through the PC and the Internet in command prompt, as shown in Fig. 5.

We have assumed that the PC's Internet connection is enabled already. If you have trouble navigating to Scripts folder and the script, follow the instructions given in the sketch generated for serial connection. Once the board gets connected, you will notice the status in the browser shows the board is connected successfully. Fig. 4 shows that Cayenne is waiting for the board to get connected.

Once connected successfully, you can control your circuit from Cayenne platform on the PC or by using Cayenne app on Android device. In our case, the circuit consists of a PIR motion sensor and a relay connected to pins 3 and 4 of Arduino, respectively (Fig. 1).

Fig. 6 shows the homepage of Cayenne dashboard. Go to Add new... → Devices & Widgets. From the list of widgets, select Actuator → Relay → Relay Switch → Enter Settings (Fig. 7).

Give your widget a name (Relay Switch, in this case) and select Virtual from Connectivity. Define 1 under Channel—same as that defined in the source code.

Next, select Choose Widget, a bulb icon for your widget and click on Add Actuator.

Follow the same steps for the PIR motion sensor. Select Motion under Devices & Widgets → Sensors. Give a name to your widget (Digital Motion

EFY Note

The source code of this project is available for free download at source.efymag.com