



Fig. 4: Settings to get notifications on mobile and on email

wish to see. In this example, we used “It’s greater than 150,” as shown in Fig. 3. Next click on ‘OK.’

5. To get the notification through email, click ‘+ Add New Event’ and repeat steps 3 and 4. In step 4, choose action as ‘send e-mail’ and type the message you wish to see, and click on ‘OK.’ Now Eventor Settings will show two events (Event 1 and Event 2), as shown in Fig. 4. Go back to the project space and click on play button ► to run the app.

Interfacing WeMos D1 board with Arduino IDE

To use WeMos D1 board in Arduino IDE, it is necessary to follow the steps below. If you have already used WeMos D1 board with Arduino IDE, you may start directly from step 11.

6. Open Arduino IDE and go to File → Preferences. In Additional Board Manager URL field add the following address:

http://arduino.esp8266.com/stable/package_esp8266com_index.json

7. Go to Tools→Board Manager, select ‘esp8266 by ESP8266 Com-

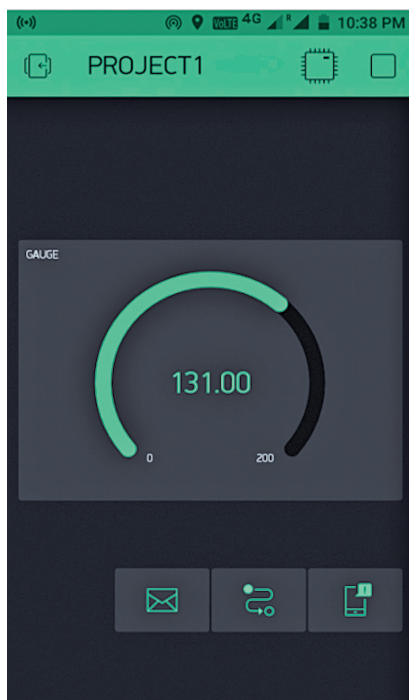


Fig. 5: Gas sensor reading

munity’ option, and click on ‘Install’ button.

8. After installation, close the Board Manager, go to Tools→Board, and select WeMos D1, R2, and mini.

9. For USB-to-serial chip, install the driver from following URL address: <http://github.com/nodemcu/nodemcu-devkit/tree/master/Drivers>

10. Go to Tools→to upload speed and select 115200.

11. Download Blynk library from the following URL and in Arduino IDE go to Sketch→Include Library→Add Zip Library and select the downloaded zip file: <https://github.com/blynkkk/blynk-library/releases/tag/v0.5.2>

12. Change the token number, Wi-Fi username, and password in the following line of given program (*blynk_gas.ino*).

```
char auth[] = "4042a240e2ea48bea5ffeedb13eb715"; // Your token number
char ssid[] = "your wifi user name";
```

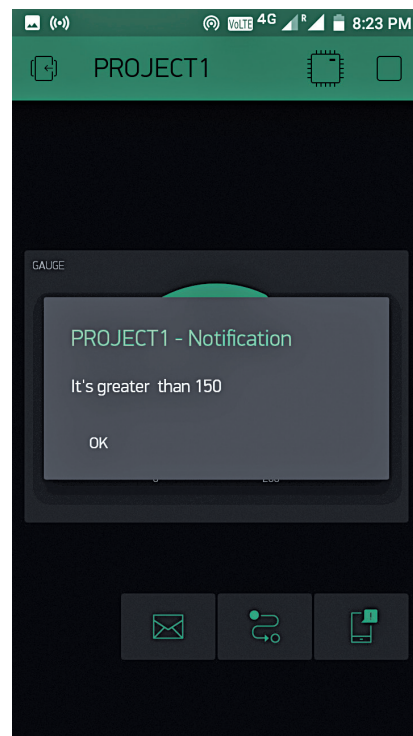


Fig. 6: Notification when sensor value exceeds 150

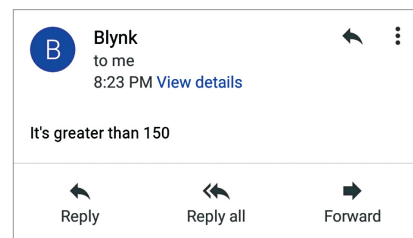


Fig. 7: Email received when sensor value exceeds 150

```
// Wi- Fi User name
char pass[] = "your password"; // Wi-Fi password
```

13. Ensure that Wi-Fi and the Internet connections in your PC and smartphone are working properly.

14. Finally, upload the program (*blynk_gas.ino*) to WeMos D1 board using Arduino IDE. You will get the sensor value in gauge, as shown in Fig. 5. If the sensor value is greater than 150, you will get notifications on your smartphone and email, as shown in Fig. 6 and Fig. 7, respectively. **EFY**

EFY Note
The source code of this project is available for free download at source.efymag.com



D. Citharthan is assistant professor at Christ The King Engineering College, Coimbatore, Tamil Nadu