

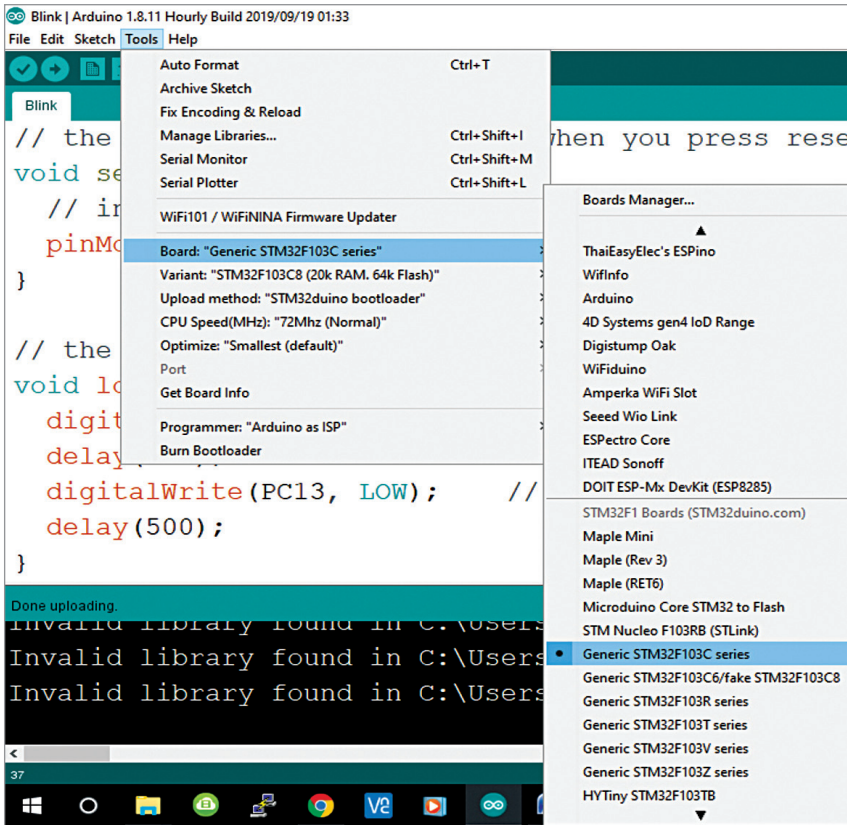


Fig. 14: STM32F103C board selection process.



Fig. 15: Port selection

Step 1. If you have not yet installed the Arduino IDE, download and install it now. Make sure you select your correct operating system.

Step 2. After installing Arduino IDE, open and download the required packages for the STM32 board. This can be done by selecting File→Preferences.

Step 3. Clicking on Preferences will open the dialogue box. In the additional Boards Manager URL text box paste the following link and press OK, as shown in Fig. 13: http://dan.drown.org/stm32duino/package_STM32duino_index.json

Step 4. Go to Tool→Boards→Board Manager to open the Boards Manager dialogue box, search for

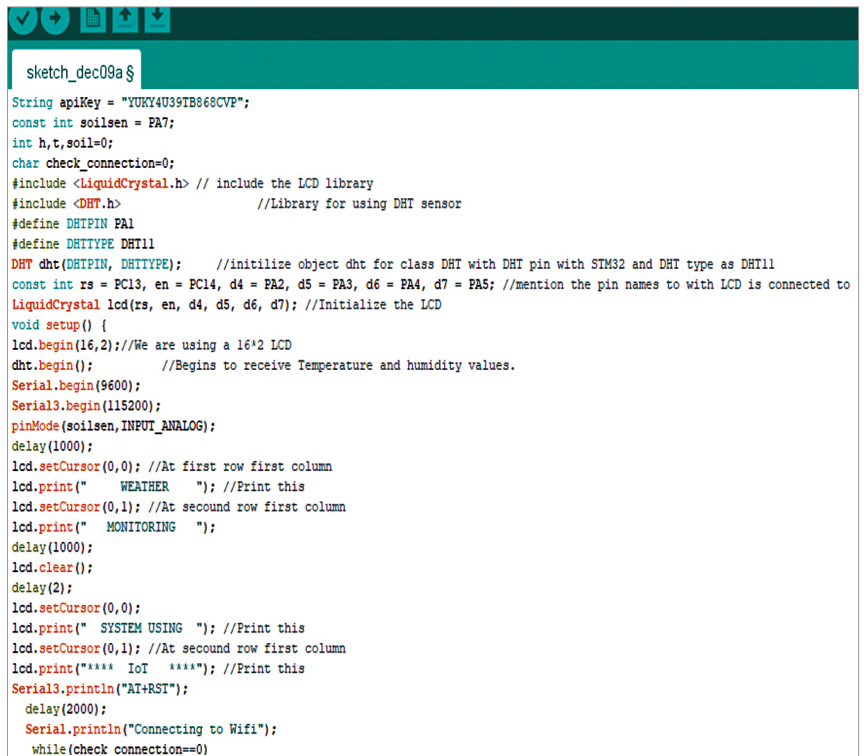


Fig. 16: Code snippet setting API token

STM32F103C, and install the package that appears.

Step 5. After completion of the package installation, go to Tools and scroll down to find the Generic STM32F103C series, as shown in Fig. 14. Make sure the variant is 64k Flash type and CPU speed is 72MHz. Change the upload method to Serial, as shown below in figure B.

Step 6. Connect micro USB board to the computer and check to which COM port the STM32 board is connected for using device manager. Then, select the same port number in Tools→Port.

Step 7. After all the changes are made, check the bottom right corner of the Arduino IDE where you will see which port the STM32 (Blue Pill) board is connected to. (COM9 shown in Fig. 15 for author's prototype but yours might differ.) Now the Arduino IDE is ready to program the STM32 Blue Pill development board.