


Depopulate 0 ohm jumpers when using external differential clock
Place jumpers close to UMC connectors to reduce stubbing

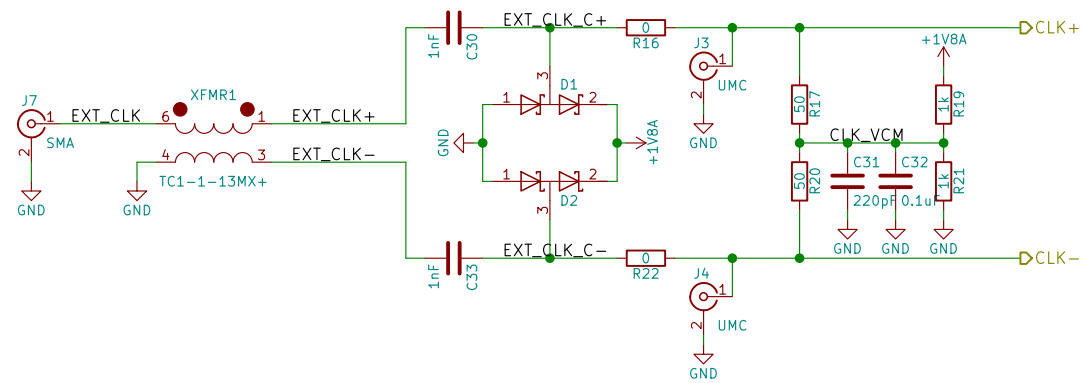

Sheet: /Clocking/ File: Clocking.sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad 5.1.2-f72e74a84ubuntu18.04.1		Id: 2/2