

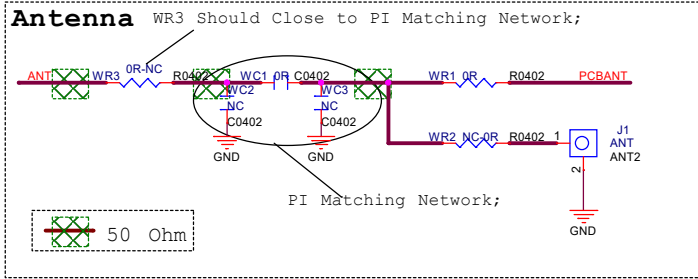




VCC-BAT: 2.7V~5.5V 600mA
VDD-3V3: Supply PA, IO and Flash.
2.7V~3.5V 400mA
VDD25-EF: Supply Key,
2.4V~2.6V 40mA

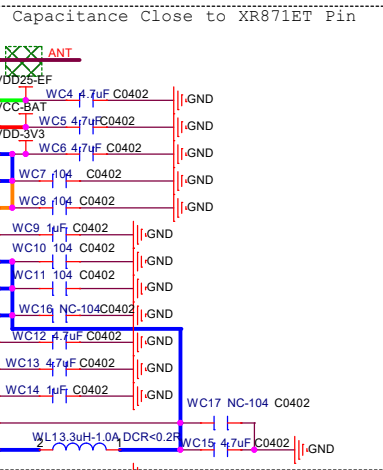

FLASH

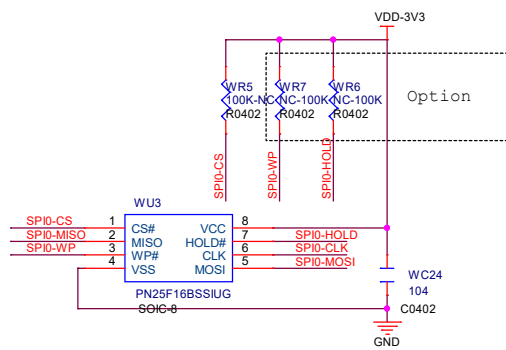

CLK




HOSC

Key power supply



CHIP RESET



芯之联

Design Name	XR871ET Simple REF		
Size A3	Page Name	XR871ET Simple REF	
Date:	Thursday, August 10, 2017	Sheet	1 of 2
Rev	1.0		