


VCC-BAT: 2.7V~5.5V 600mA

VDD-3V3: Supply PA, IO and Flash.


2.7V~3.5V 400mA

VDD25-EF: Supply Key,


2.4V~2.6V 40mA



CLK




LOSC




HOSC


Key power supply



CHIP RESET



FLASH

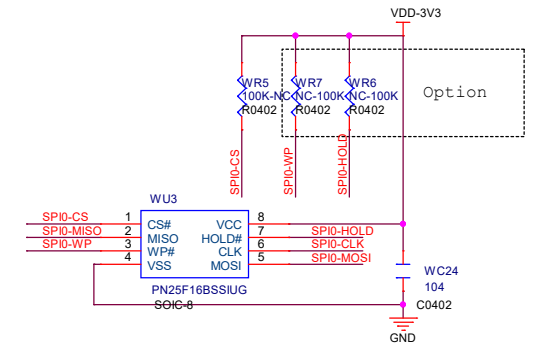

芯之联

Design Name			XR871GT Simple REF	
Size	A3	Page Name	XR871GT Simple REF	
Date:	Thursday, August 10, 2017	Sheet	1	of 2
			Rev	1.0