

```
long x;
long y;
#include "Keyboard.h"
#include "Mouse.h"
#include <SoftwareSerial.h>
// software serial//Software Serial Port

SoftwareSerial mySerial(9, 8); // RX, TX
long serialA;
void setup() { // initialize the buttons' inputs:
  Serial.begin(9600);
  mySerial.begin(9600);
  Mouse.begin();
  Keyboard.begin();
}
```

Fig. 4: Arduino Pro Micro code setting library

Arduino Pro Mini Connections

Table 1

Arduino Pro Mini Pin	Components Pin
Arduino Pro Mini SCL	MPU6050 SCL
Arduino Pro Mini SDA	MPU6050 SDA
Arduino Pro Mini Vcc	MPU6050 Vcc
Arduino Pro Mini GND	MPU6050 GND
Arduino Pro Mini TX	Bluetooth HC05 RX
Arduino Pro Mini RX	Bluetooth HC05 TX
Arduino Pro Mini Vcc	Bluetooth HC05 +Ve
Arduino Pro Mini Vcc	Pushbutton switch (S1 through S4)
Arduino Pro Mini (A0 through A3)	Pushbutton switch (S1 through S4)

```
void loop() {
  if (mySerial.available() > 2) {
    serialA = mySerial.parseInt();
    Serial.println(serialA);
  }

  if (serialA >= 20000 && serialA < 20010) {

    Serial.println("xread");
    Serial.println(x);

    x = map(serialA, 20000, 20010, -5, 5);
    delay(10);

  }

  if (serialA >= 30000 && serialA < 30010) {

    Serial.println("yread");
    y = map(serialA, 30000, 30010, -5, 5);
    Serial.println(y);
  }
}
```

Fig. 5: Checking the data to set coordinate values

```
if (serialA >= 30000 && serialA < 30010) {
  Serial.println("yread");
  y = map(serialA, 30000, 30010, -5, 5);
  Serial.println(y);

  delay(10);
}

Mouse.move(x, y);

if (serialA == 80000) {
  Serial.println("Left");
  Mouse.press(MOUSE_RIGHT);
  Serial.println(serialA);

  delay(10);
}

if (serialA == 90000) {
  Serial.println("Right");
  Mouse.press(MOUSE_LEFT);
}
```

Fig. 6: Setting mouse click function

Arduino Pro Micro Connections

Table 2

Arduino Pro Micro pin	Bluetooth HC-05 pin
Vcc	+VE
GND	-VE
Pin 9	TX
Pin 8	RX

to another Arduino over Bluetooth (refer Fig. 3).

Our Arduino Mini code (transmitter) is ready now. So, let's start coding for Arduino Pro Micro (receiver). First, we will create variables to store values, then set up Bluetooth to read serial data of the sensor (refer Fig. 4).

In the third part of our coding process, we will create a loop function and get the serial data from Bluetooth. Here in this code, I have used software serial for Bluetooth connection with a baud rate of 9600.

After that, we check the range value of serial data and assign its value for mouse movement as shown in Fig. 5.

Next, we will create if () condition to check how the mouse button functions (refer Fig. 6). We can also add extra keyboard shortcuts and other functions to it. Here in this code, I have added buttons shortcut for copy and paste functions. You can create your own custom function according to your requirement.

As we have completed the coding part, we need to connect the components. Arduino Pro Mini pin-to-pin connections are shown in Fig. 7 and also shown in Table 1.

Switches S1 through S4 are con-

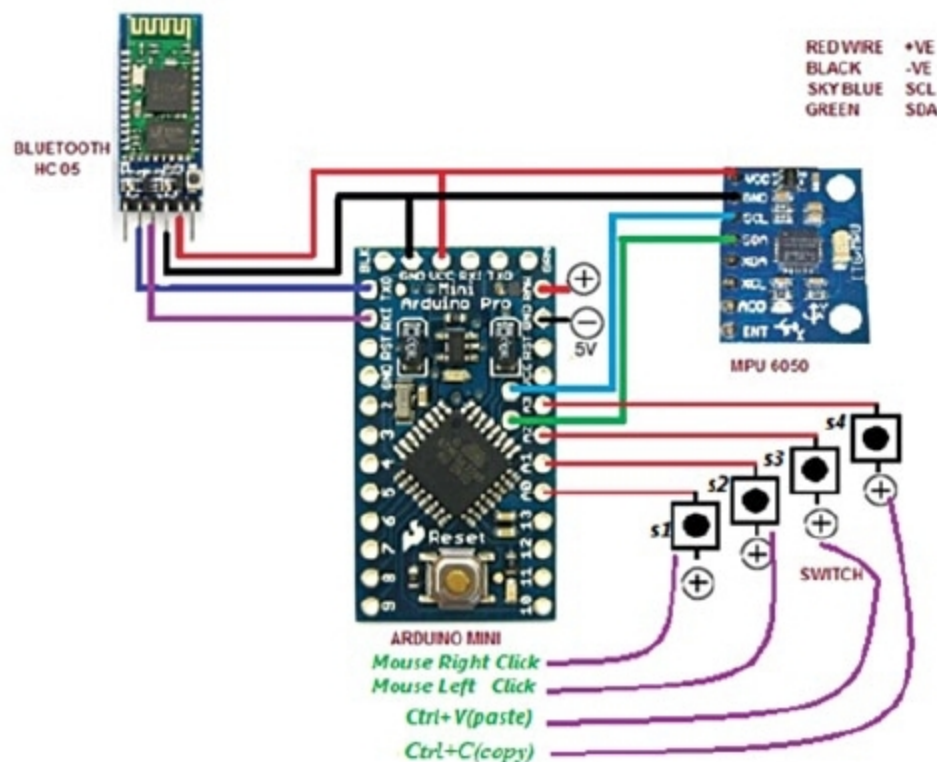


Fig. 7: Connections with Arduino Pro Mini (transmitter)