

Bias power supply with SMPS pre-regulator


TITLE: EEZ PSU power board r5B8

Document Number:

REV:

Date: 19. 06. 2016. 15:23

Sheet: 2/5

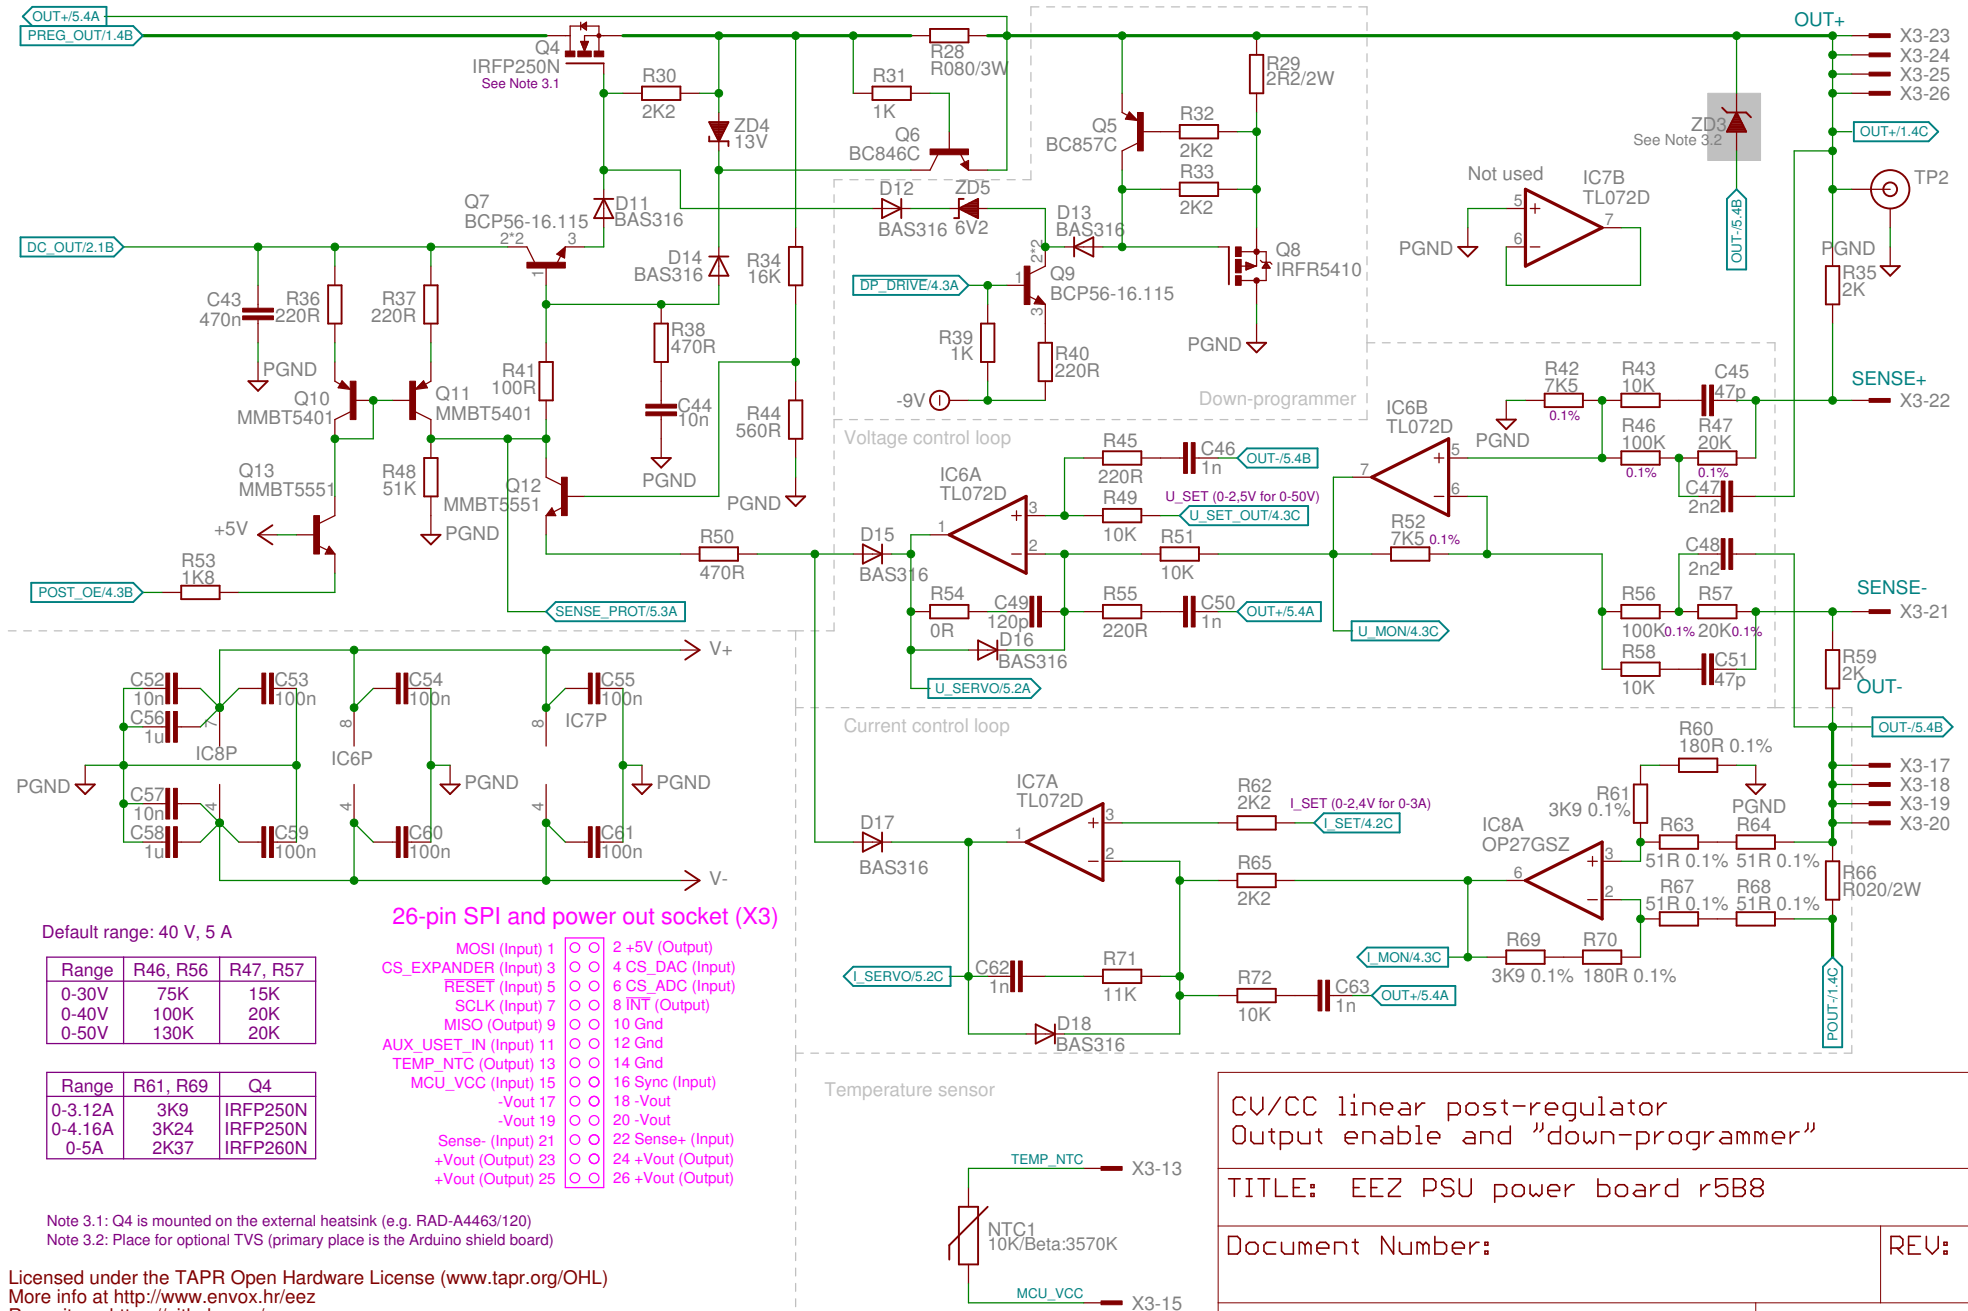

Digital control (SPI)

SSW-113-02-T-D-RA

X3-9 PS_MISO

X3-5 PS_RESET

X3-1 PS_MOSI

X3-7 PS_SCLK

X3-3 CS_EXPANDER

+5V

X3-2

X3-10

X3-12

X3-14

PGND

X3-8

INT

JMP2-0R

X3-4

CS_DAC

PGND

X3-6

CS_ADC

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND

PGND








PGND

PGND

PGND

PGND

PGND

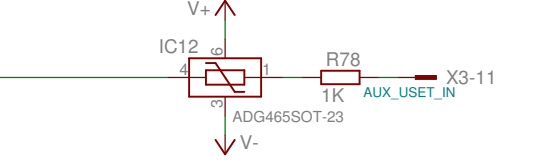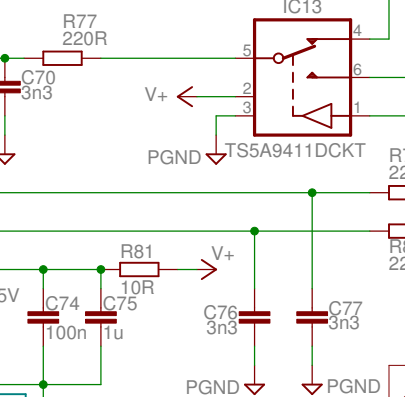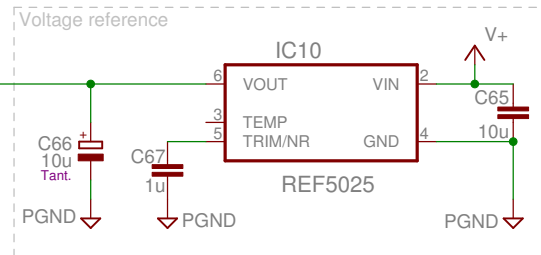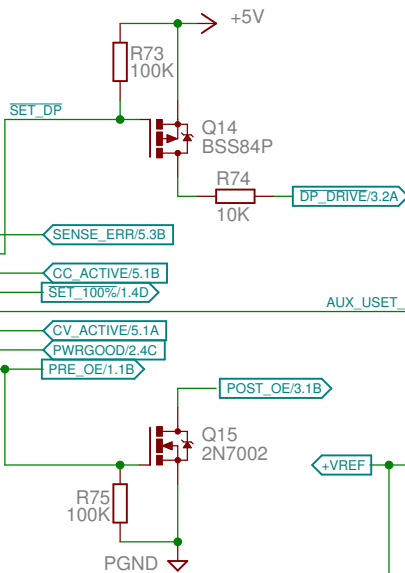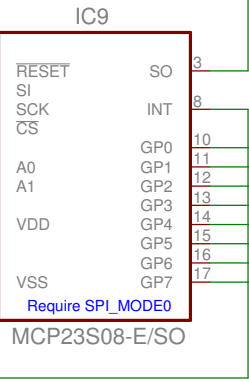

I/O Expander		
Bit	Function	Direction
0	Sense error	Output
1	Down programmer disable	Output
2	CC	Input
3	Set 100% duty cycle	Output
4	Remote programming	Output
5	CV	Input
6	Power good	Input
7	Output enable	Output


SPI I/O expander, DAC, ADC, Voltage reference
Remote programming

TITLE: EEZ PSU power board r5B8


Document Number: REV:

Date: 19. 06. 2016. 15:23 Sheet: 4/5

Constant Voltage (CV) and Constant Current (CC) mode indicator

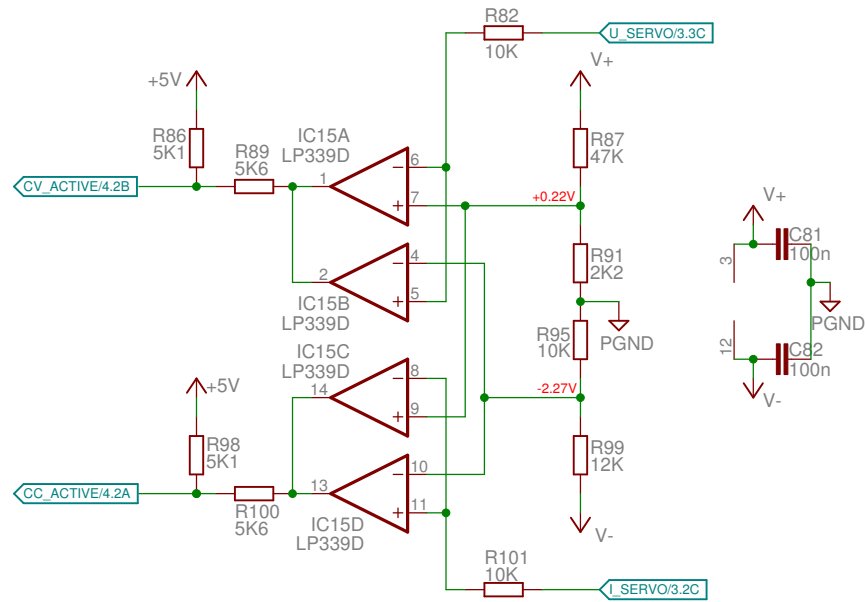

Remote sense reverse polarity detection

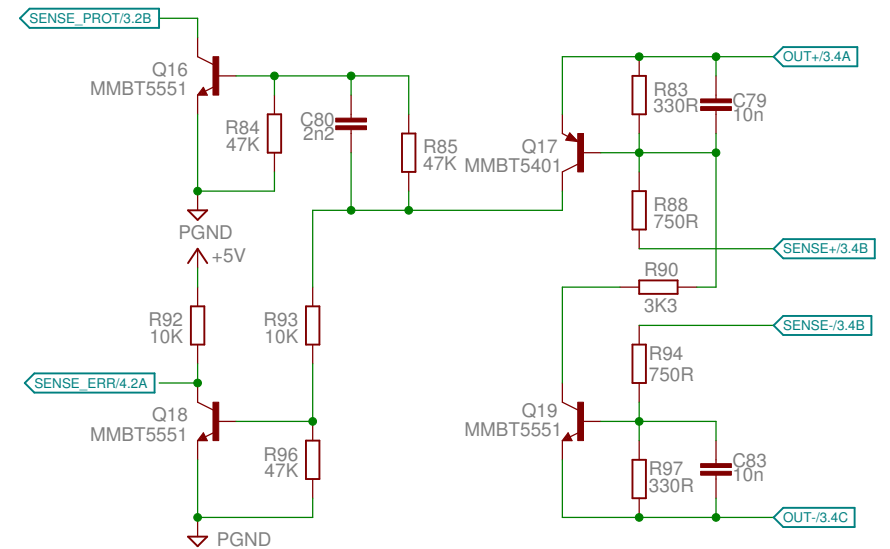

CC/CV indicators, Sense error detection

TITLE: EEZ PSU power board r5B8

Document Number:

REV:

Date: 19. 06. 2016. 15:23

Sheet: 5/5