




Ethernet connector with optional surge protection

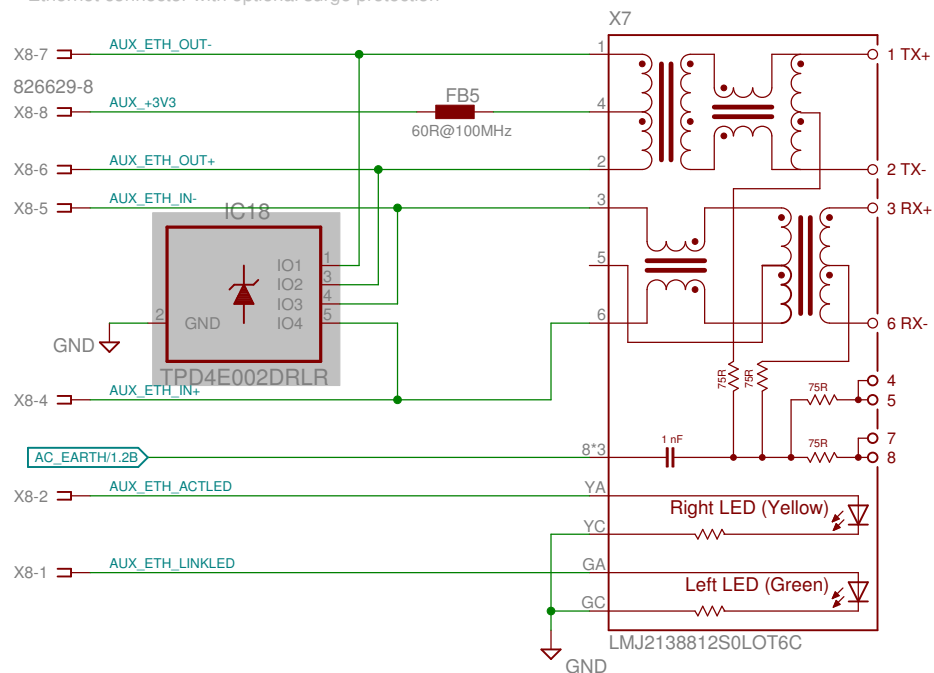

12VDC fan control

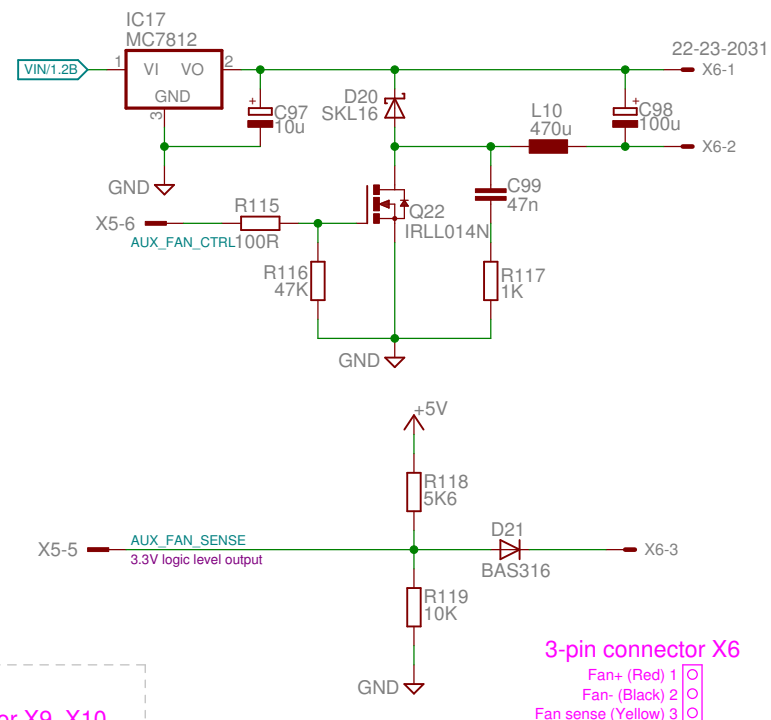

USB connector with optional isolator and surge protection

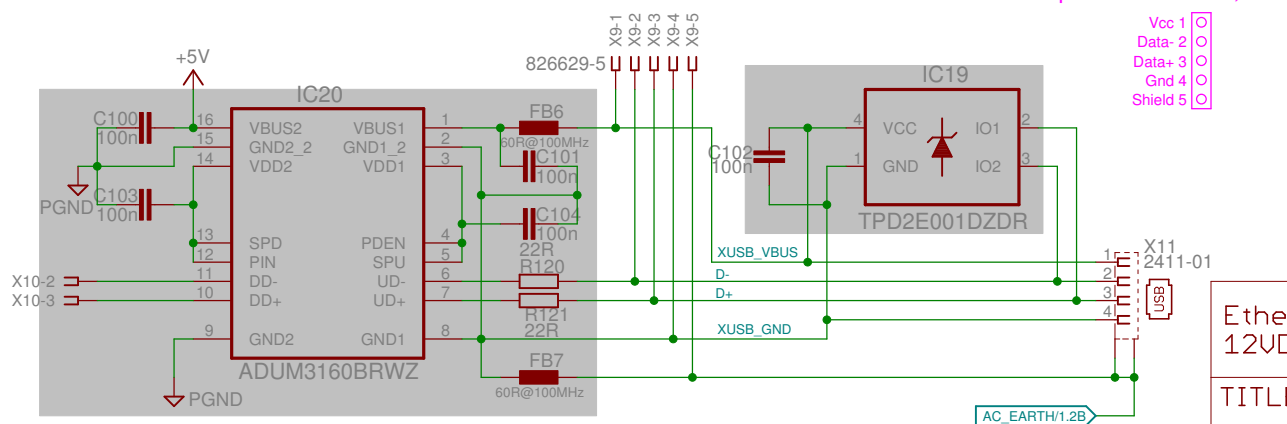

Note 7.1: Mount X4 and X8 on the opposite (top) side of the PCB. Use 14 mm (e.g. Bossard B3X14/BN3320) for enclosure with 3 mm rear panel

Ethernet and USB PCB connectors
12VDC fan driver (max. 300 mA)

TITLE: EEZ AUX PS r5B8

Document Number:

REV:

Date: 29. 06. 2016. 09:36

Sheet: 2/2