


DESCRIPTION	MATERIAL	FINISH
Center Contact	Beryllium Copper Alloy	Gold
Body	Brass	See Schedule
Washer	Phosphor Bronze	See Schedule
Fastening Nut	Brass	See Schedule
Insulator	PTFE	

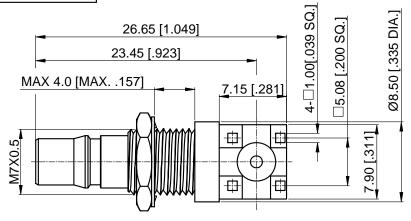



Recommended Panel Mounting Hole



Recommended PCB Mounting Hole

SW 9 [.354 HEX.]	2.60 [.10	[.250] [.250]		
6.88 [.271] 16.90 [.665] Ø1.27 [.050 DIA		0.50 [.020] 3.95 [.156] 6.35	10.45 [.411]	14.55 [.573]
0 DIA 1				

Part	Finish	Part Number	
Body/Washer/Fastening Nut	Albaloy	ANO 2622-4035	
Body/Washer/Fastening Nut	Gold	ANO 2622-4035A	

Schedule Changed	 07/02/12	F
Add Schedule	 09/08/11	E
Structure Changed	 07/25/11	D
Add Schedule	 07/21/11	С
Structure Changed	 12/12/09	В
Release to Mfg.	 04/08/09	Α

## NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME

Title:

CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

L	riad corredate		0,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Ŭ	2. COSTOWER OUTLINE DRAWING FO
	Structure Changed		12/12/09	В	Drawn: L. Yang 09/08/11
ſ	Release to Mfg.		04/08/09	Α	Checked: X. B. Yang 09/08/11
ſ	Description	Ecn.No	Date	Rev	Approved: J. Qu 09/08/11

Unless otherwise specified dimensions are in millimeters, dimensions in [ ] are in inches for customer reference only.

Unless Otherwise Specified tolerance are:

.XX ±0.13 [.005"]

.X ±0.20 [.008"] ±0.50 [.019"] ±1° ±2°

QMA Right Angle	<b>Bulkhead Female</b>
PCB Receptacle	



Part No:		
	ANO	262

<b>A</b>	ANO 2622-4035						
	Size:	Scale:	Sheet:	Rev:			
	A4	2.5:1	1/1	F			

