



# STANDARD MACHINING

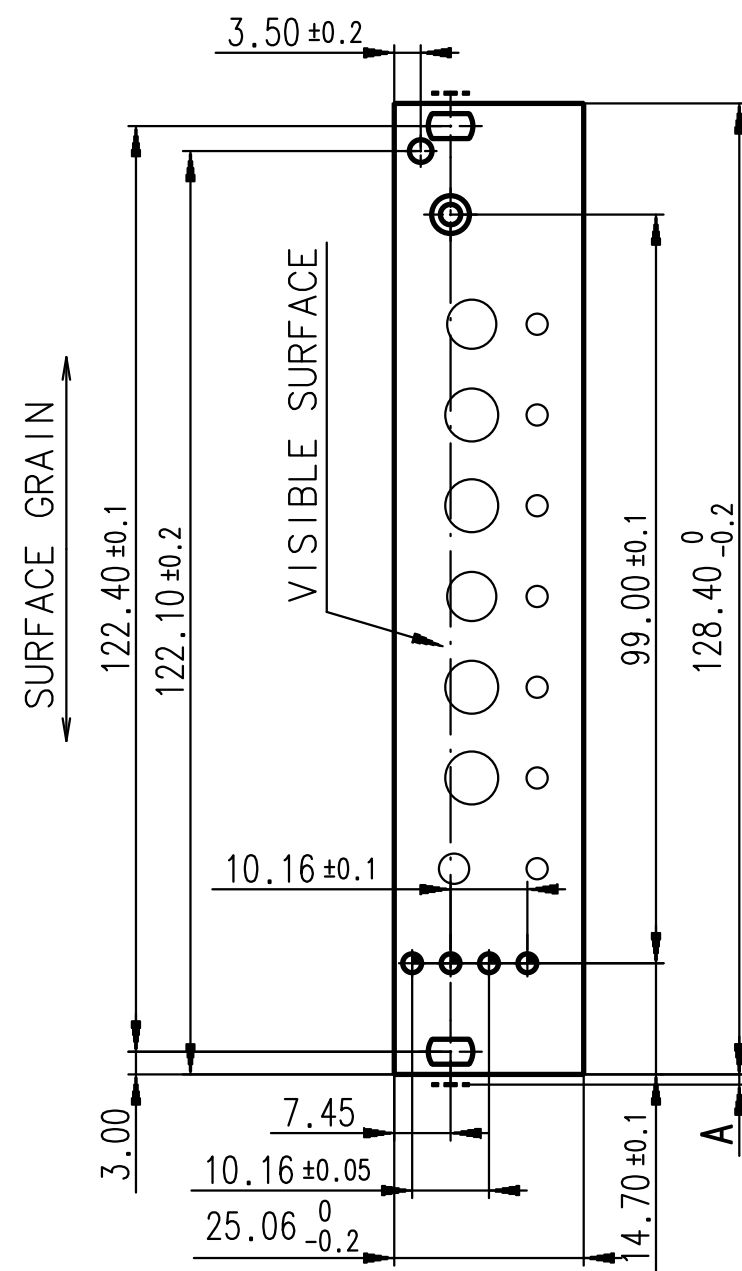


# CUSTOMIZED MACHINING

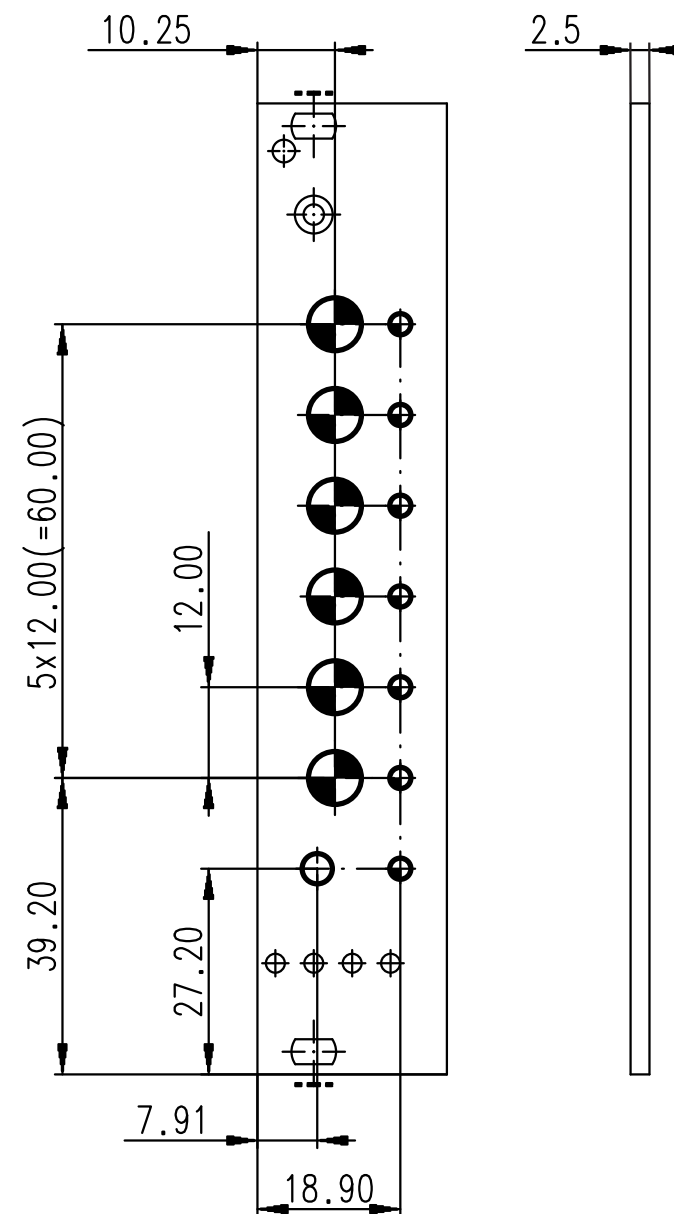


# ASSEMBLY

FRONT FACE

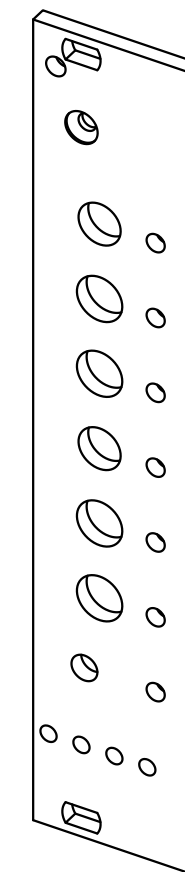

REAR FACE

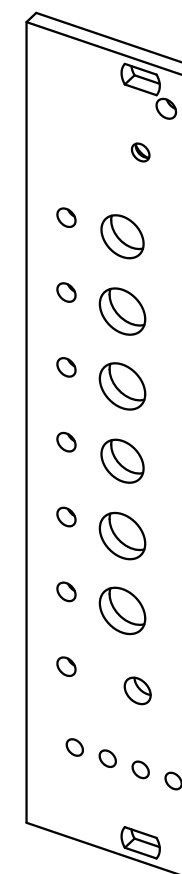

- ⊕  $\phi 2.50^{0.11}$
- ⊕  $\phi 3.00$
- ⊕ SN120-AF2.5
- ⊕  $\phi 5.90^{+0.05} \times 3.30^{+0.05}$  ALLOWED

A: MAX. DEFORMATION 0.2 ALLOWED

- ⊕  $\phi 7.00$  (4x) FOR QMA CONNECTOR
- ⊕  $\phi 4.00$  (1x) FOR SWITCH
- ⊕  $\phi 2.80$  (7x) FOR LED PIPE

TOLERANCES FOR UNTOLERANCED DIMENSIONS

- ±0.2 FOR POSITION OF CUSTOMIZED MACHINING WITH REGARD TO REFERENCE EDGES
- ±0.1 FOR ANY DISTANCES BETWEEN CUT-OUTS
- ±0.1 FOR CUT-OUT DIMENSIONS

Copyright University of Geneva, Easy-phi 2013.

This documentation describes Open Hardware and is licensed under the CERN OHL V1.2

You may redistribute and modify this documentation under the terms of the CERN OHL V1.2 (<http://ohwr.org/cernohl>). This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING OF MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE.

Please see the CERN OHL V1.2 for applicable conditions

University of Geneva  
Group of Applied Physics  
Chemin de Pinchat 22  
1227 Carouge / Switzerland

*Easy-phi*  
Your instruments

Title: High-speed Logic Gate - Front panel

Size: A3

Date: 21 nov 2013

File: High-speed Logic Gate - Front panel.pdf