

FEATURES

- Standard *easyφ* input and output
- Ultra fast 1GHz maximum input and output
- Logical function AND, OR, fan-out
- Quad output fully configurable for each logical function
- Leds for signal activity


STANDARD *easyφ* FEATURES

- Hot Plug&Play with permanent parameter storage
- All parameters can be remotely change
- Embedded software for multi-platform hosts (1GB sd-card)
- Standalone or rack mount

APPLICATIONS

- Fan-out
- Logical OR between two signals
- Logical AND between two signals

FRONT PANEL

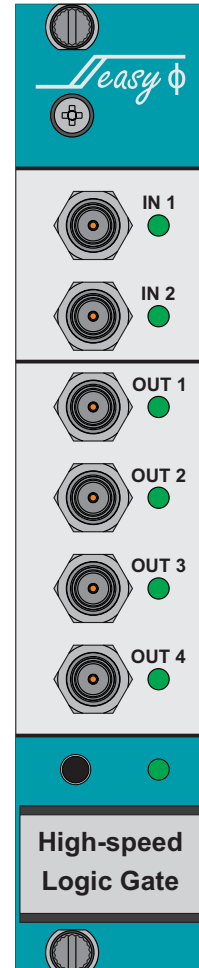

FUNCTIONAL BLOCK DIAGRAM

