


## STANDARD MACHINING

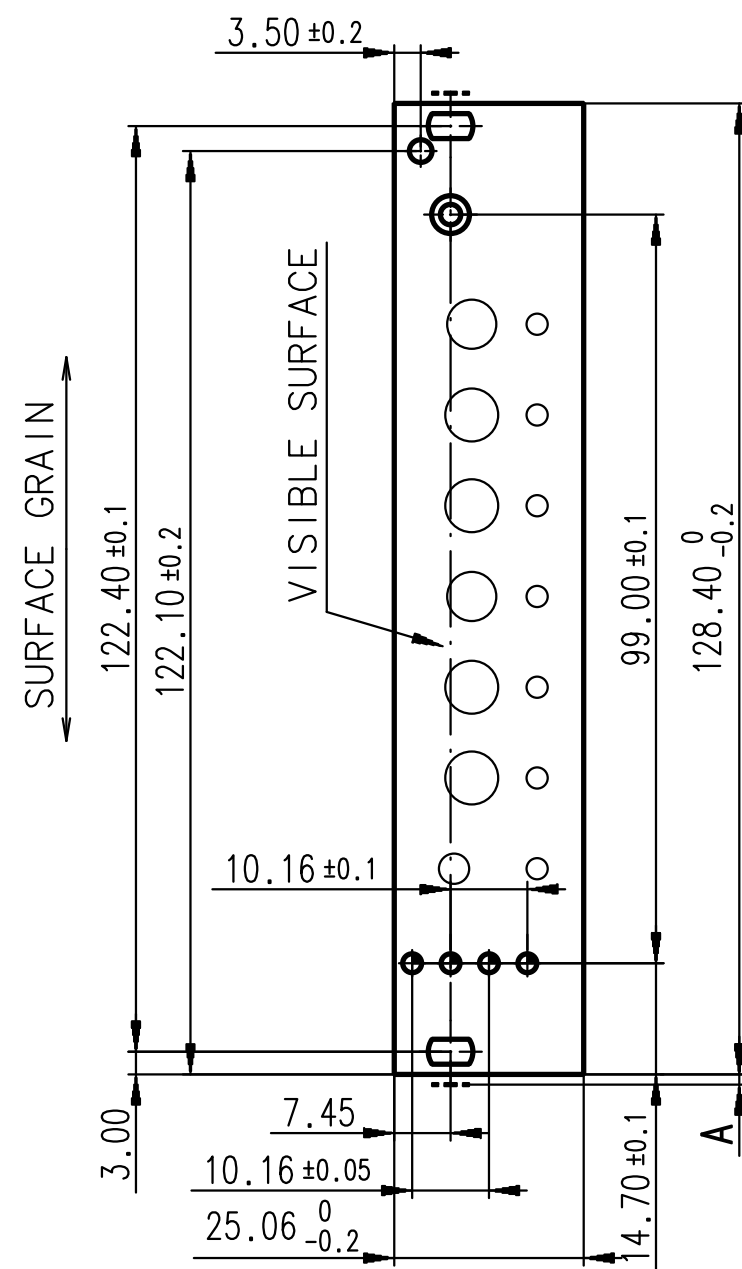

⊕  $\phi 2.50^{0.11}$


⊕  $\phi 3.00$

⊕ SN120-AF2.5

⊕  $\phi 5.90^{+0.05}_{-0.05} \times 3.30^{+0.05}_{-0.05}$  ⊕ ALLOWED

A: MAX. DEFORMATION 0.2 ALLOWED

## CUSTOMIZED MACHINING

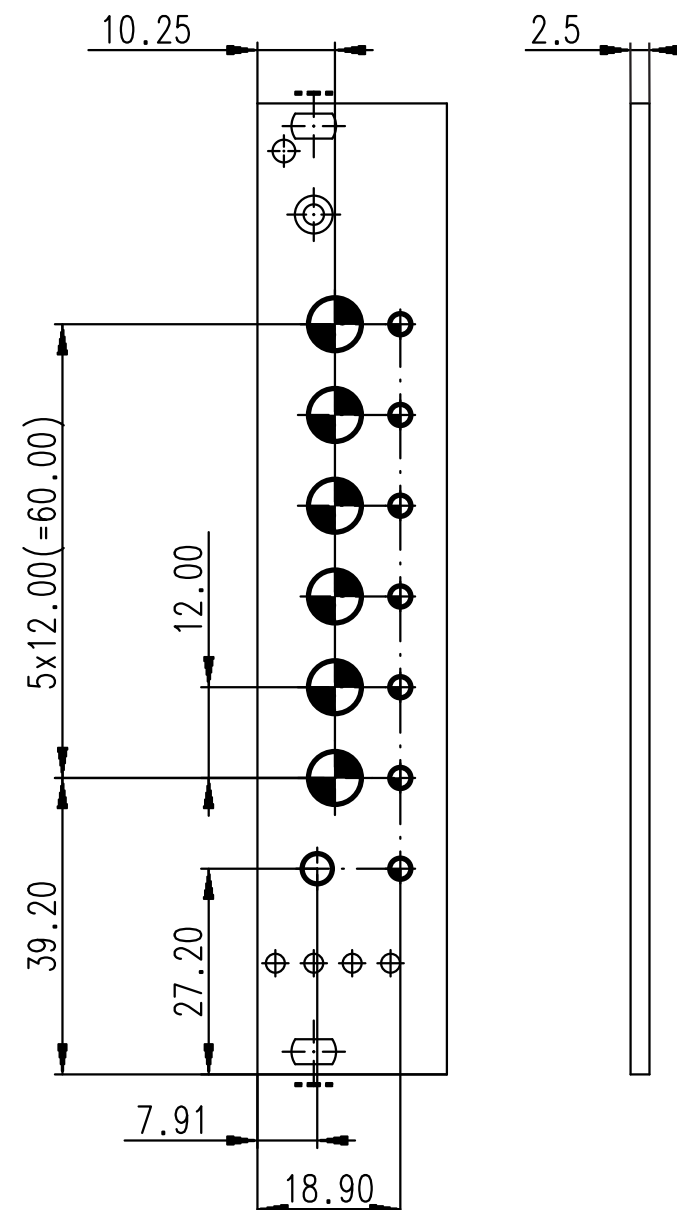

$\phi 7.00$  (4x) FOR QMA CONNECTOR



$\phi 4.00$  (1x) FOR SWITCH



$\phi 2.80$  (7x) FOR LED PIPE

TOLERANCES FOR UNTOLERANCED DIMENSIONS


±0.2 FOR POSITION OF CUSTOMIZED MACHINING WITH REGARD TO REFERENCE EDGES

±0.1 FOR ANY DISTANCES BETWEEN CUT-OUTS


±0.1 FOR CUT-OUT DIMENSIONS

## ASSEMBLY

FRONT FACE

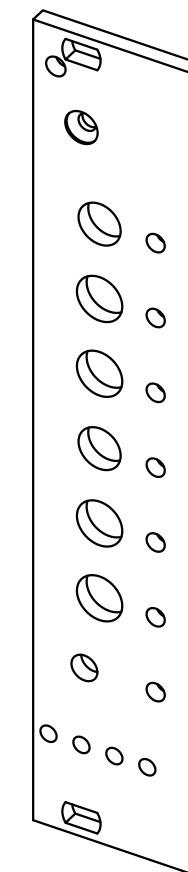

REAR FACE

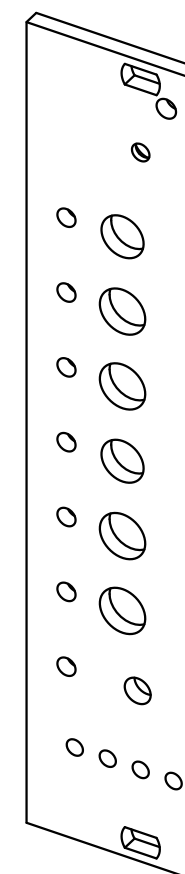

Copyright University of Geneva, Easy-phi 2013.

This documentation describes Open Hardware and is licensed under the CERN OHL V1.2

You may redistribute and modify this documentation under the terms of the CERN OHL V1.2 (<http://ohwr.org/cernohl>). This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING OF MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE.

Please see the CERN OHL V1.2 for applicable conditions

University of Geneva

Group of Applied Physics

Chemin de Pinchat 22  
1227 Carouge / Switzerland

*Easy-phi*  
Your instruments

Title: High-speed Dual Delay Lines - Front panel

Size: A3

Date: 2 nov 2013

File: High-speed Dual Delay Lines - Front panel.pdf