


SCHROFF STANDARD MACHINING

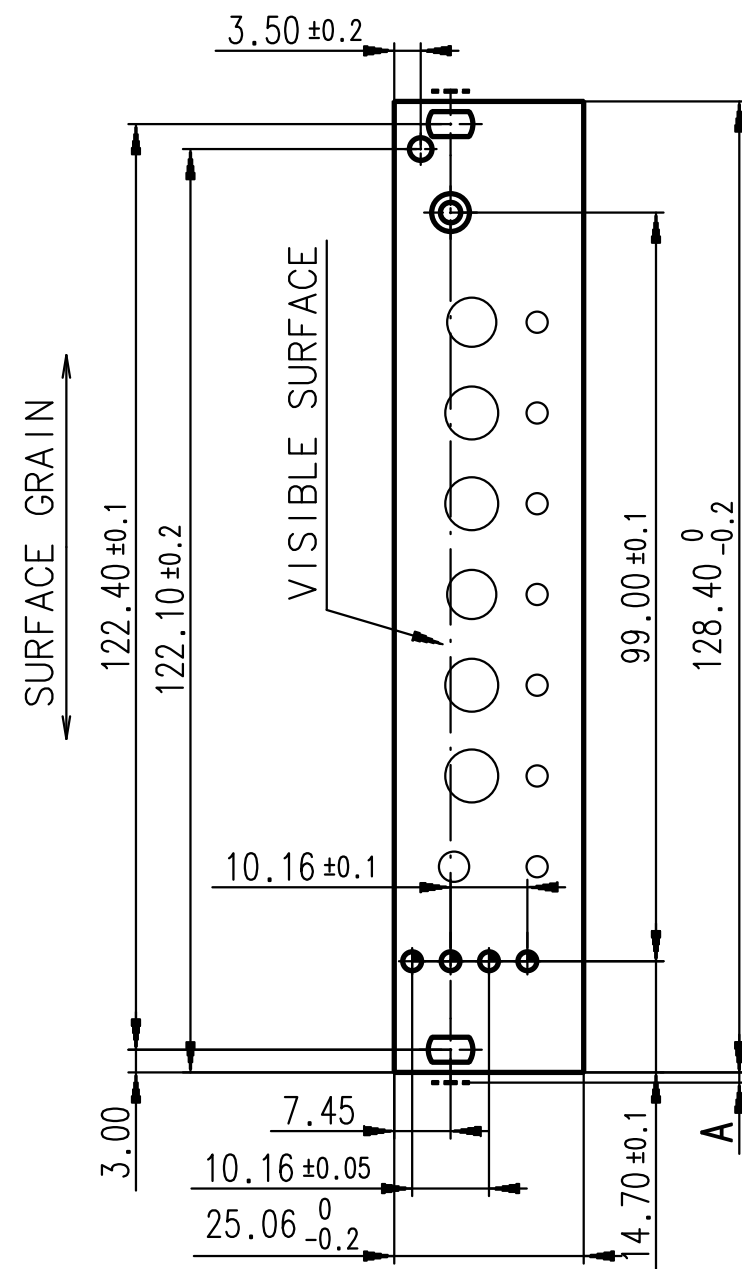


BASED ON 20818-019 SCHROFF MODULE

- $\phi 2.50^{0.11}$
- $\phi 3.00$
- SN120-AF2.5
- $\phi 5.90^{+0.05}_{-0.05} \times 3.30^{+0.05}_{-0.05}$ ALLOWED

A: MAX. DEFORMATION 0.2 ALLOWED

CUSTOMIZED MACHINING

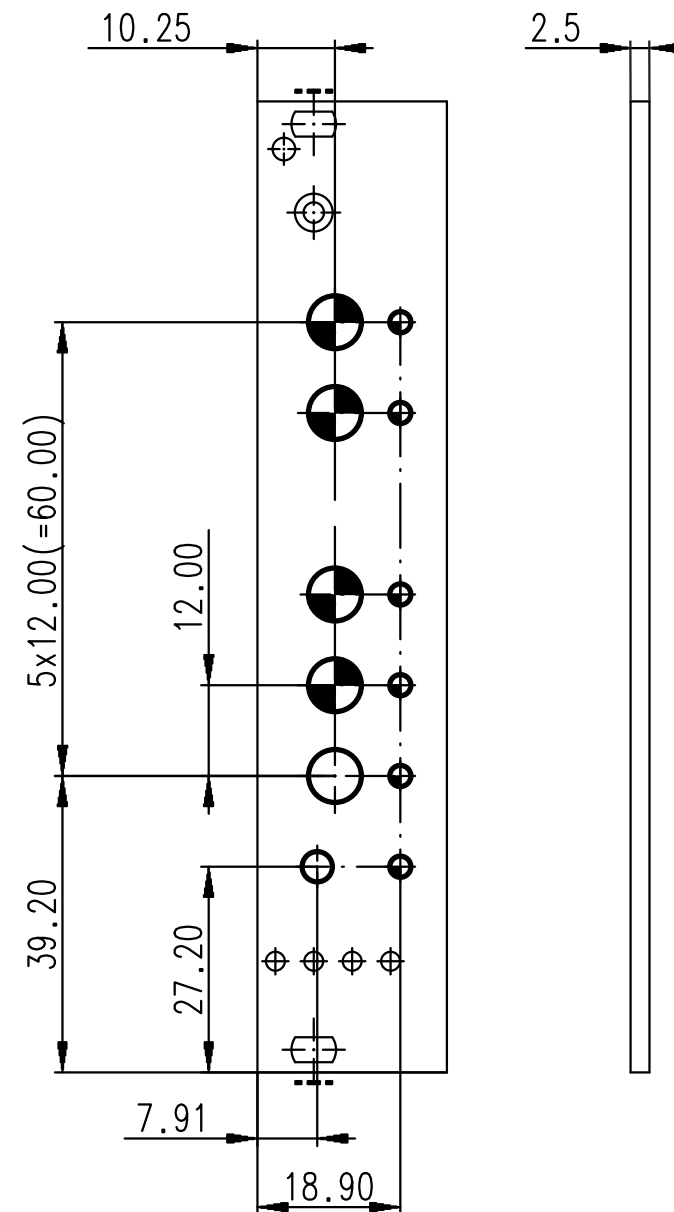


- $\phi 7.00$ (4x) FOR QMA CONNECTOR
- $\phi 6.50$ (1x) FOR SMA CONNECTOR
- $\phi 4.00$ (1x) FOR SWITCH
- $\phi 2.90$ (6x) FOR LED PIPE

TOLERANCES FOR UNTOLERANCED DIMENSIONS


- ±0.2 FOR POSITION OF CUSTOMIZED MACHINING WITH REGARD TO REFERENCE EDGES
- ±0.1 FOR ANY DISTANCES BETWEEN CUT-OUTS
- ±0.1 FOR CUT-OUT DIMENSIONS

ASSEMBLY

FRONT FACE

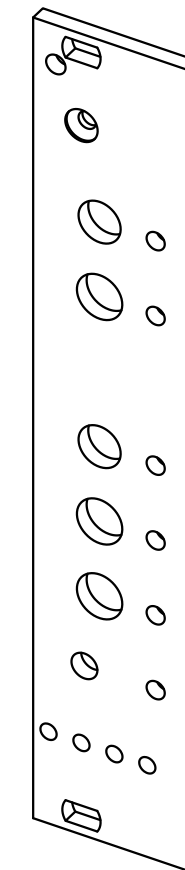

REAR FACE

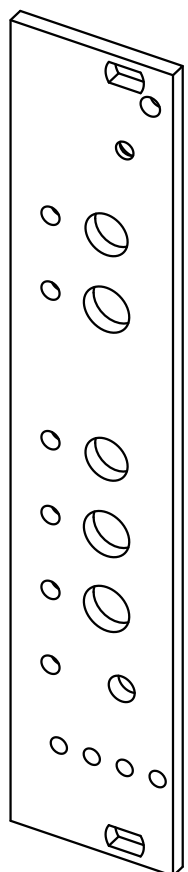

Copyright University of Geneva, Easy-phi 2013.

This documentation describes Open Hardware and is licensed under the CERN OHL V1.2

You may redistribute and modify this documentation under the terms of the CERN OHL V1.2 (<http://ohwr.org/cernohl>). This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING OF MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE.

Please see the CERN OHL V1.2 for applicable conditions

University of Geneva

Group of Applied Physics

Chemin de Pinchat 22
1227 Carouge / Switzerland

Easy-phi
Your instruments

Title: QQVQQA connectors - Front panel

Size: A3

Date: 28 avril 2014

File: QQVQQA connectors - Front panel.pdf