
REV 0.1 — PROTOTYPE PCB SUBMITTED FOR FABRICATION

Connector symbols list physical pin numbers in one column. PCB view determines orientation.

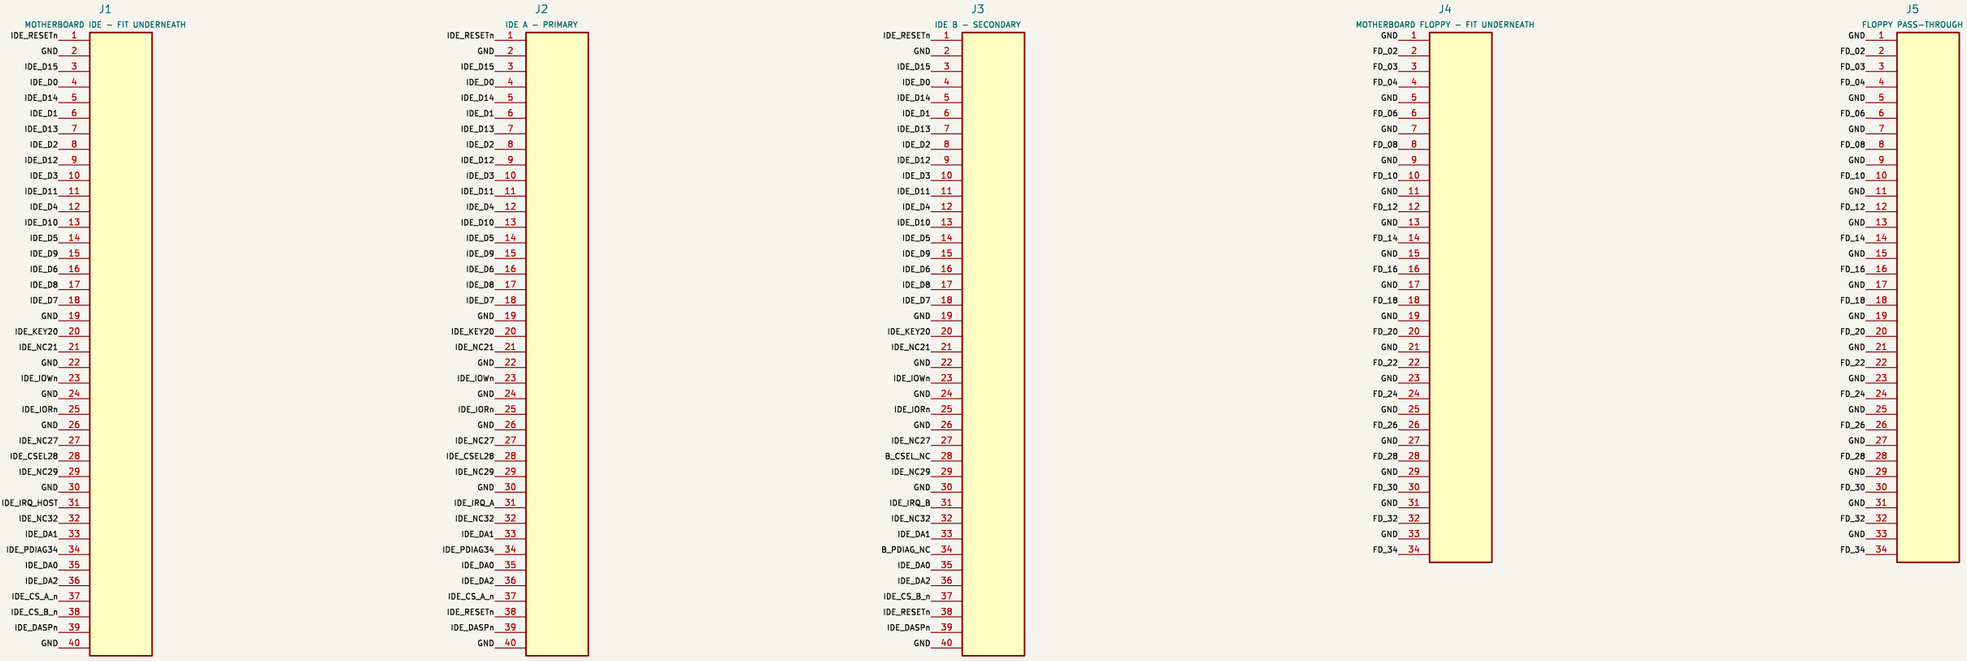

FLOPPY: J4 pin n passes to J5 pin n. Documented ground positions also join GND.

IDE ground pins 2/19/22/24/26/30/40 and floppy ground pins 1,5,7...33 share copper planes.

J2/J3 pin 38 = RESETn; J3 pin 37 = host pin 38. J3 pins 28 and 34 intentionally isolated.





D1 / D2: cathodes (banded ends, pin 1) join host IRQ pin 31. Anodes go to each output IRQ.

The two diodes isolate interrupt signals. Channel selection uses host pins 37 and 38.

No drive power supply, extra buffers or DMA support are added. Power drives separately.

Black PCB / white silkscreen. 58.42 x 55.88 mm. Four copper layers.

UK Computing / JMC. Assembly, mechanical fit and Amiga hardware tests are pending.

UNTESTED: verify fit and pinout before manufacture.

Sheet: /
File: Amiga4000_IDE_Expansion.kicad_sch

Title: Amiga 4000D IDE Expansion

Size: A3	Date: 2026-10-26	**Rev: 0.1**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1